



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 460P 1DW460PALPFB07170
 Component
Front Differential
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0221999	JR0202398	---
Sample Date		Client Info		14 Jun 2024	05 Mar 2024	---
Machine Age	hrs	Client Info		1467	1001	---
Oil Age	hrs	Client Info		1467	1001	---
Filter Age	hrs	Client Info		549	549	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		17	12	---
Iron	ppm	ASTM D5185m	>500	24	4	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	2	2	---
Lead	ppm	ASTM D5185m	>25	15	<1	---
Copper	ppm	ASTM D5185m	>100	12	2	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	5	5	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Water		WC Method	>.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	0	---
Boron	ppm	ASTM D5185m	6	2	<1	---
Barium	ppm	ASTM D5185m	0	3	0	---
Molybdenum	ppm	ASTM D5185m	0	0	0	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m	145	93	100	---
Calcium	ppm	ASTM D5185m	3570	3360	3445	---
Phosphorus	ppm	ASTM D5185m	1290	1087	938	---
Zinc	ppm	ASTM D5185m	1640	1285	1230	---
Sulfur	ppm	ASTM D5185m		4073	3718	---
Visc @ 40°C	cSt	ASTM D445	57.0	49.5	57.1	---

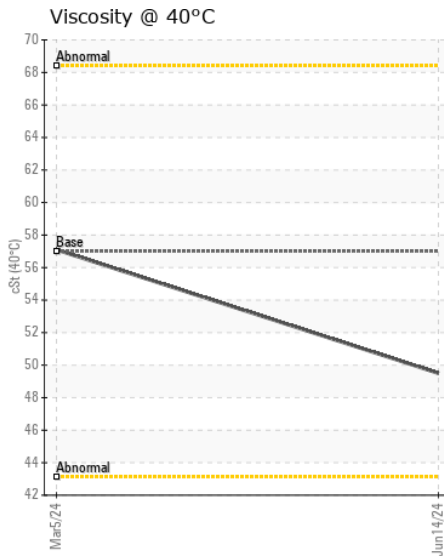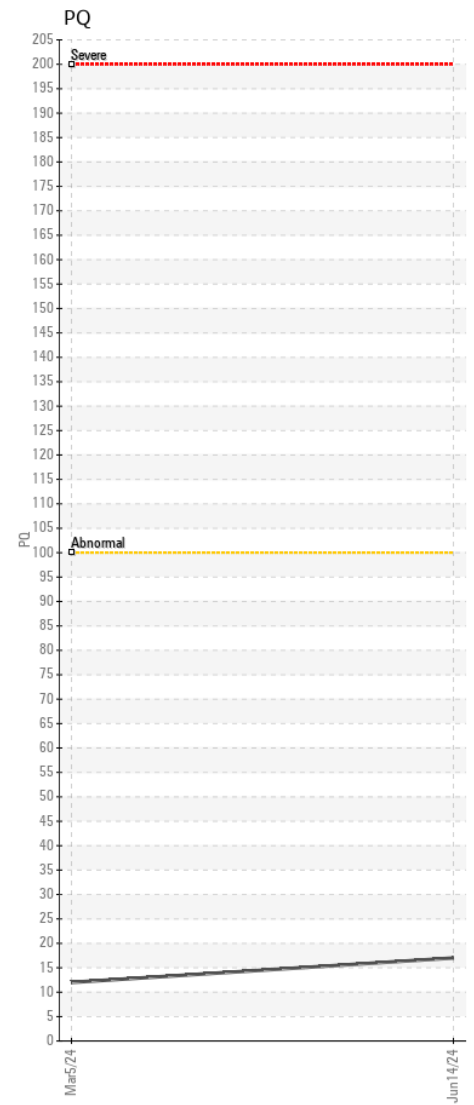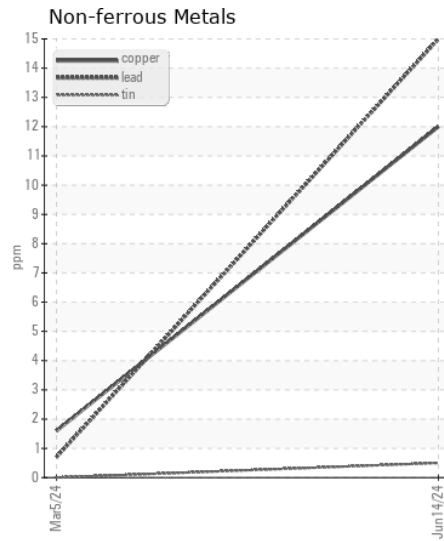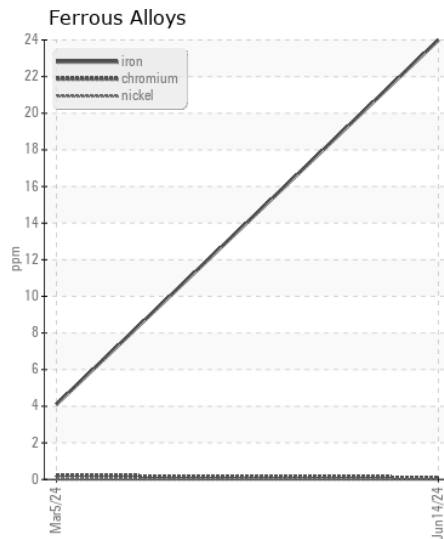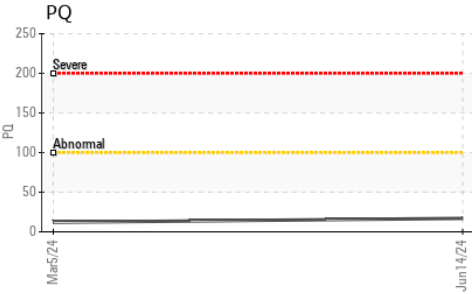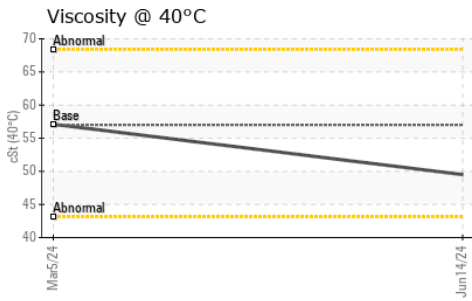

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0221999 **Received** : 18 Jun 2024
Lab Number : 06213792 **Tested** : 20 Jun 2024
Unique Number : 11086656 **Diagnosed** : 20 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529
 Contact: JOHN GUASCHINO
 john.guaschino@jamesriverequipment.com
 T:
 F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)