



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area

[42375]

Machine Id

VOLVO EC200EL 315068

Component

Swing Drive

Fluid

VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP447505	---	---
Sample Date		Client Info		14 Jun 2024	---	---
Machine Age	hrs	Client Info		946	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>400	120	---	---
Chromium	ppm	ASTM D5185m	>10	2	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>200	8	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










Moderate concentration of visible dirt/debris present in the oil.

Silicon	ppm	ASTM D5185m	>50	10	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	▲ MODER	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	379	133	---	---
Barium	ppm	ASTM D5185m	0.0	<1	---	---
Molybdenum	ppm	ASTM D5185m	0.8	0	---	---
Manganese	ppm	ASTM D5185m	0.0	1	---	---
Magnesium	ppm	ASTM D5185m	31	2	---	---
Calcium	ppm	ASTM D5185m	38	45	---	---
Phosphorus	ppm	ASTM D5185m	1077	1461	---	---
Zinc	ppm	ASTM D5185m	46	43	---	---
Sulfur	ppm	ASTM D5185m	23526	19303	---	---
Visc @ 40°C	cSt	ASTM D445	139	153	---	---

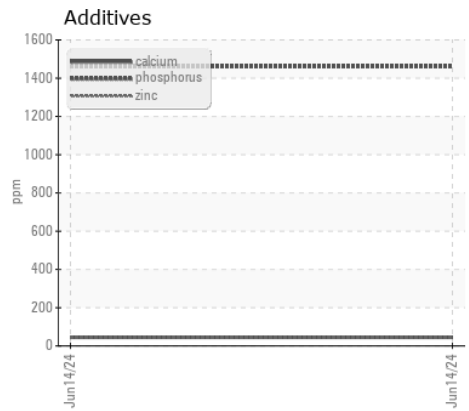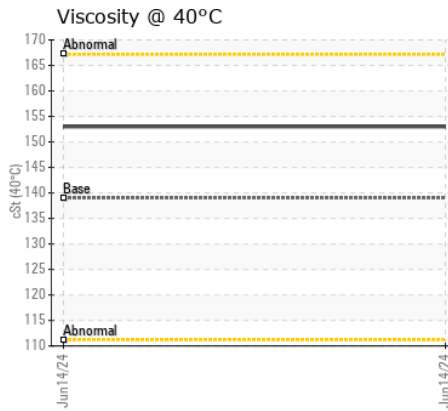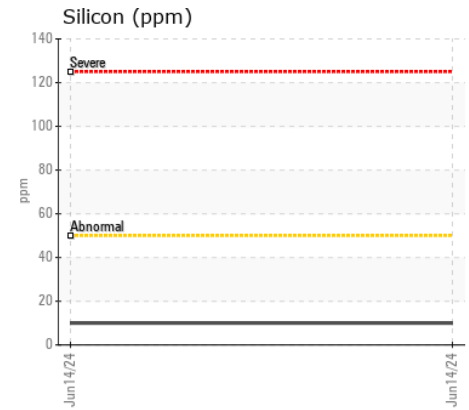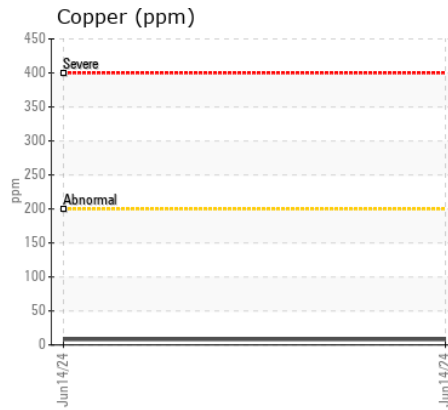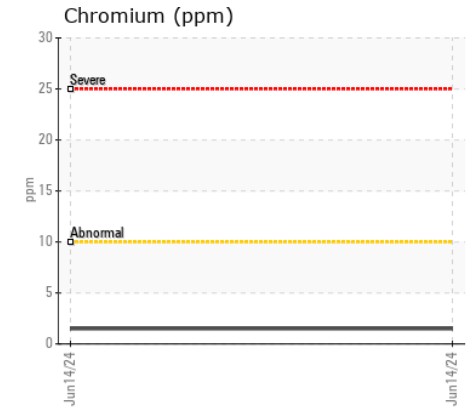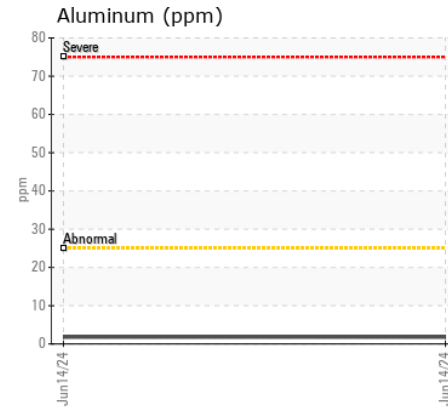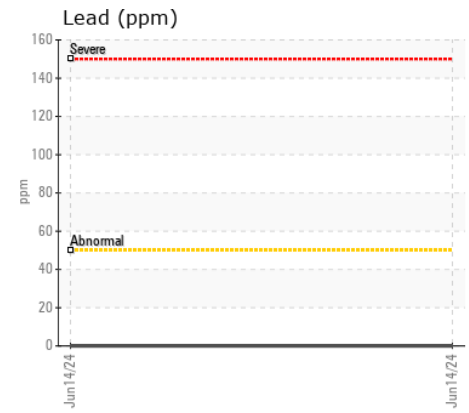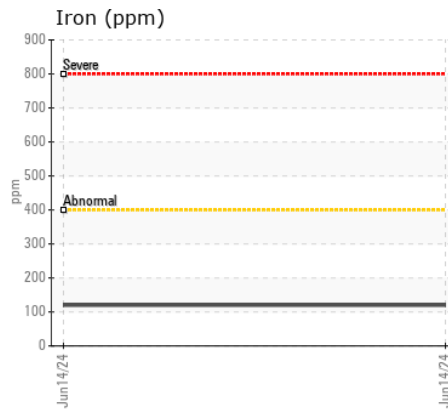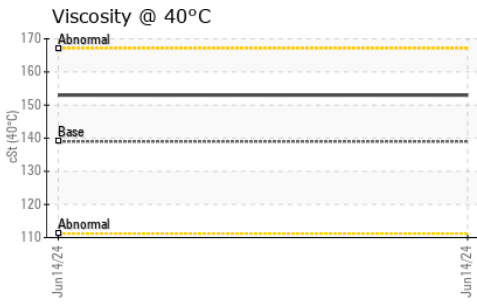

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP447505
Lab Number : 06213855
Unique Number : 11086719
Test Package : MOB 1

Received : 18 Jun 2024
Tested : 20 Jun 2024
Diagnosed : 20 Jun 2024 - Don Baldrige

215 - ASCENDUM MACHINERY INC - CAYCE
 2303 AIRPORT BLVD
 CAYCE, SC
 US 29033

Contact: ROBBY HERLONG
 robbly.herlong@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (803)394-6783
 F: (803)791-9920