



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO A45GFS 352471**  
Component  
**Rear Axle**  
Fluid  
**VOLVO SUPER GEAR OIL 75W-80-GO102 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ASC0011078</b>	ASC0008674	VCP441598
Sample Date		Client Info		<b>16 Jun 2024</b>	14 Feb 2024	20 Oct 2023
Machine Age	hrs	Client Info		<b>5030</b>	4476	3990
Oil Age	hrs	Client Info		<b>1030</b>	486	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	<b>64</b>	23	171
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	2
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	<1	0
Lead	ppm	ASTM D5185m	>50	<b>0</b>	0	3
Copper	ppm	ASTM D5185m	>150	<b>2</b>	<1	6
Tin	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>4</b>	1	3
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	3
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>MODER</b>	LIGHT	HEAVY
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	2	2
Boron	ppm	ASTM D5185m		<b>266</b>	266	213
Barium	ppm	ASTM D5185m		<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m		<b>2</b>	<1	8
Manganese	ppm	ASTM D5185m		<b>4</b>	2	10
Magnesium	ppm	ASTM D5185m		<b>1</b>	0	0
Calcium	ppm	ASTM D5185m		<b>69</b>	7	121
Phosphorus	ppm	ASTM D5185m		<b>2405</b>	2336	2398
Zinc	ppm	ASTM D5185m		<b>36</b>	2	63
Sulfur	ppm	ASTM D5185m		<b>25324</b>	27608	26972
Visc @ 40°C	cSt	ASTM D445		<b>51.7</b>	52.1	51.5

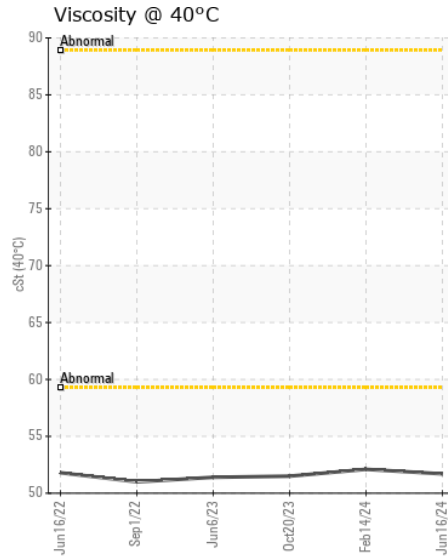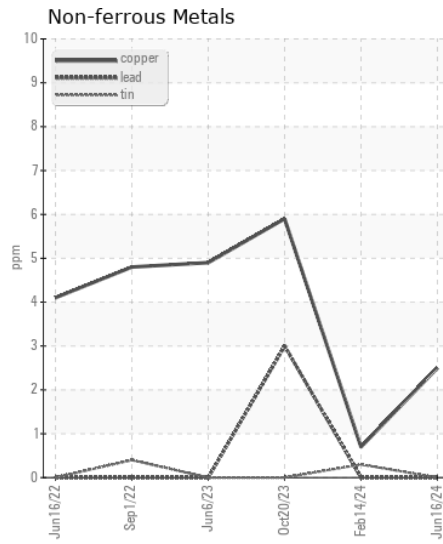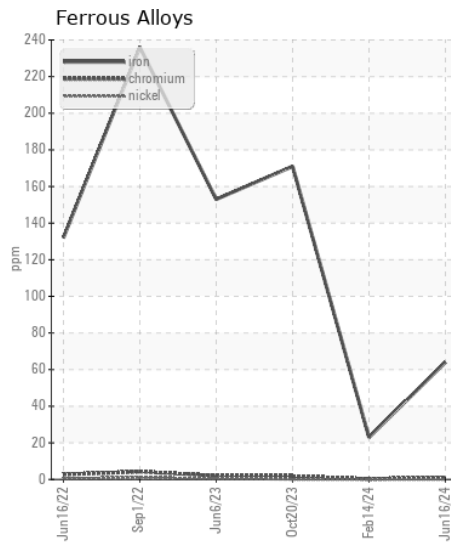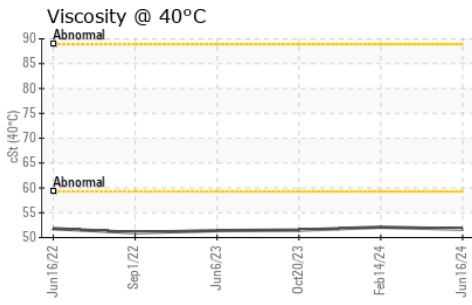

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0011078  
**Lab Number** : 06213874  
**Unique Number** : 11086738  
**Test Package** : CONST  
**Received** : 18 Jun 2024  
**Tested** : 20 Jun 2024  
**Diagnosed** : 20 Jun 2024 - Don Baldrige

**BLYTHE CONSTRUCTION INC**  
 2911 N GRAHAM STREET  
 CHARLOTTE, NC  
 US 28231  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: (704)373-2960