



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A45GFS 352471
Component
Bogie/Center Axle
Fluid
VOLVO SUPER GEAR OIL 75W-80-GO102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011075	ASC0008686	VCP441600
Sample Date		Client Info		16 Jun 2024	14 Feb 2024	20 Oct 2023
Machine Age	hrs	Client Info		5030	4476	3990
Oil Age	hrs	Client Info		1030	486	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	175	69	187
Chromium	ppm	ASTM D5185m	>20	3	<1	2
Nickel	ppm	ASTM D5185m	>10	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	1	0
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>150	1	<1	6
Tin	ppm	ASTM D5185m	>20	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	4	2	6
Potassium	ppm	ASTM D5185m	>20	1	0	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	MODER	NONE	MODER
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	2	2
Boron	ppm	ASTM D5185m		264	280	155
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		4	2	2
Manganese	ppm	ASTM D5185m		8	3	9
Magnesium	ppm	ASTM D5185m		2	0	0
Calcium	ppm	ASTM D5185m		16	4	117
Phosphorus	ppm	ASTM D5185m		2427	2394	2302
Zinc	ppm	ASTM D5185m		18	0	62
Sulfur	ppm	ASTM D5185m		25991	27706	27355
Visc @ 40°C	cSt	ASTM D445		51.3	52.2	50.6

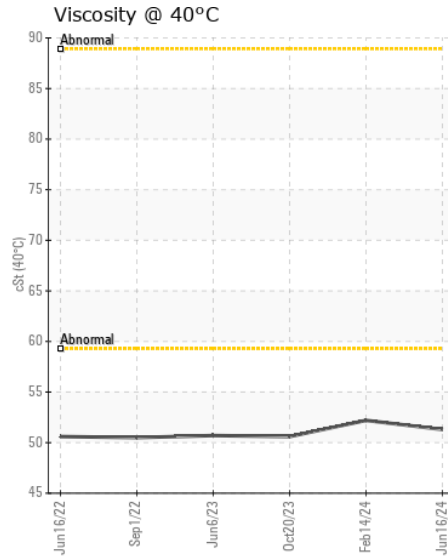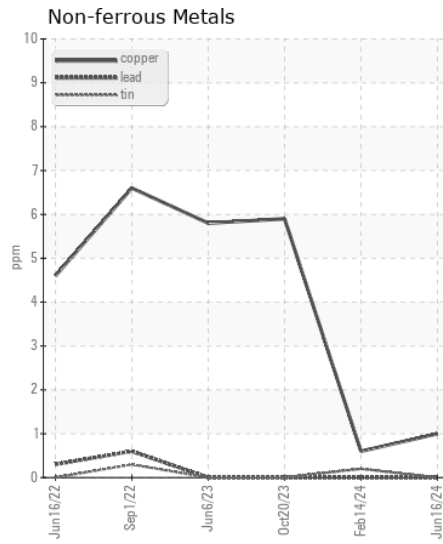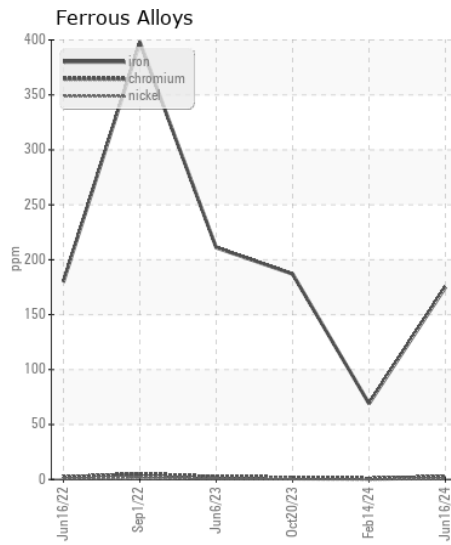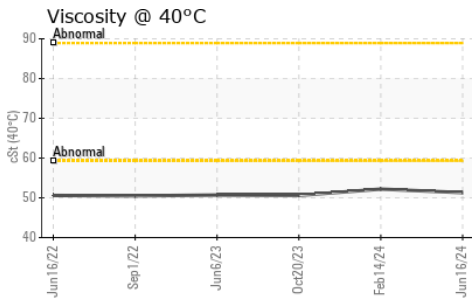

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0011075 **Received** : 18 Jun 2024
Lab Number : 06213875 **Tested** : 20 Jun 2024
Unique Number : 11086739 **Diagnosed** : 20 Jun 2024 - Don Baldrige
Test Package : CONST

BLYTHE CONSTRUCTION INC
 2911 N GRAHAM STREET
 CHARLOTTE, NC
 US 28231
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: (704)373-2960