



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Ascendum Machinery
Machine Id
VOLVO L90H 627016
Component
Rear Axle
Fluid
VOLVO WB 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0009808	ASC0001515	---
Sample Date		Client Info		13 Jun 2024	03 Jan 2024	---
Machine Age	hrs	Client Info		1005	449	---
Oil Age	hrs	Client Info		1005	449	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>300	41	28	---
Chromium	ppm	ASTM D5185m	>10	3	3	---
Nickel	ppm	ASTM D5185m	>4	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>15	2	<1	---
Lead	ppm	ASTM D5185m	>4	0	<1	---
Copper	ppm	ASTM D5185m	>200	62	49	---
Tin	ppm	ASTM D5185m	>15	6	6	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	17	16	---
Potassium	ppm	ASTM D5185m	>20	4	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	3	---
Boron	ppm	ASTM D5185m		128	128	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		2	<1	---
Manganese	ppm	ASTM D5185m		6	6	---
Magnesium	ppm	ASTM D5185m		12	14	---
Calcium	ppm	ASTM D5185m		3907	3812	---
Phosphorus	ppm	ASTM D5185m		1307	1284	---
Zinc	ppm	ASTM D5185m		1601	1559	---
Sulfur	ppm	ASTM D5185m		3873	3537	---
Visc @ 40°C	cSt	ASTM D445	55	41.6	41.8	---

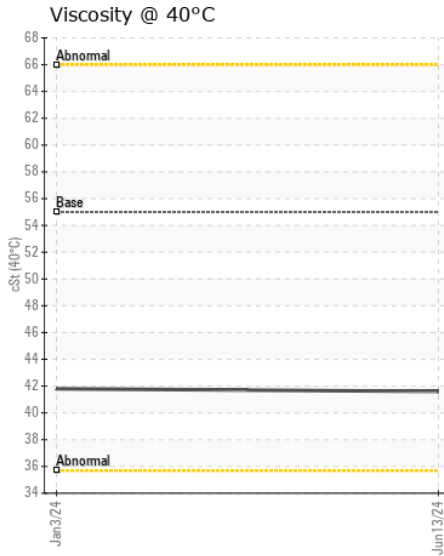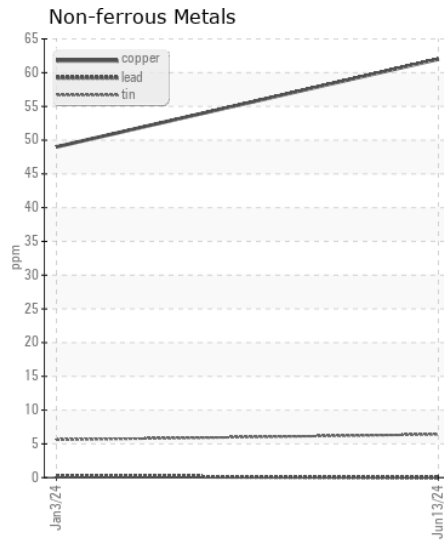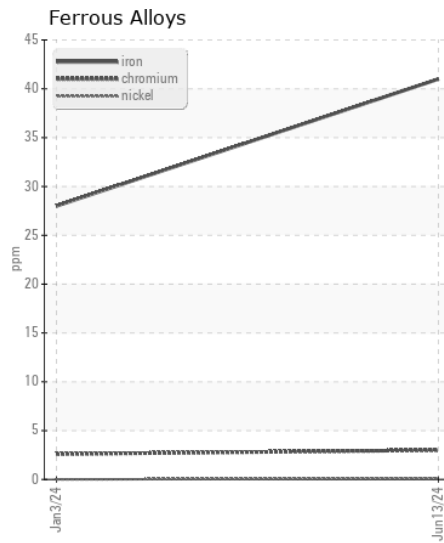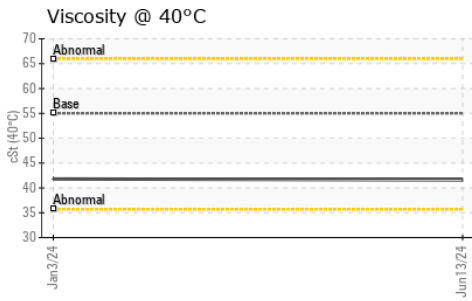

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0009808
Lab Number : 06213887
Unique Number : 11086751
Test Package : CONST
Received : 18 Jun 2024
Tested : 20 Jun 2024
Diagnosed : 20 Jun 2024 - Wes Davis

EGGER TIMBERPAK
 1801 COTTONWOOD ST
 CHARLOTTE, NC
 US 28206
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: