



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Ascendum Machinery
Machine Id
VOLVO L180H 15 (S/N 5263)
Component
Rear Axle
Fluid
VOLVO WET BRAKE TRANSAXLE OIL (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0009809	ASC0007499	ASC0007554
Sample Date		Client Info		14 Jun 2024	15 Apr 2024	07 Mar 2024
Machine Age	hrs	Client Info		13055	12150	11526
Oil Age	hrs	Client Info		905	8639	9039
Filter Age	hrs	Client Info		0	0	9039
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Not Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	96	80	64
Chromium	ppm	ASTM D5185m	>20	2	2	1
Nickel	ppm	ASTM D5185m	>10	<1	1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	2	<1
Lead	ppm	ASTM D5185m	>50	0	<1	0
Copper	ppm	ASTM D5185m	>120	1	7	4
Tin	ppm	ASTM D5185m	>20	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	12	12	11
Potassium	ppm	ASTM D5185m	>20	1	2	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	1	2
Boron	ppm	ASTM D5185m	100	124	137	132
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	<1	0
Manganese	ppm	ASTM D5185m		1	2	1
Magnesium	ppm	ASTM D5185m	0	16	14	0
Calcium	ppm	ASTM D5185m	3800	4022	3902	4128
Phosphorus	ppm	ASTM D5185m	1200	1356	1394	1383
Zinc	ppm	ASTM D5185m	1500	1629	1595	1668
Sulfur	ppm	ASTM D5185m	6500	3969	4056	4603
Visc @ 40°C	cSt	ASTM D445	52.0	42.7	44.8	42.4

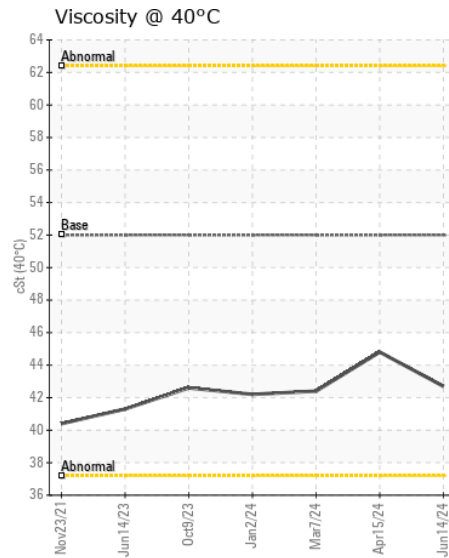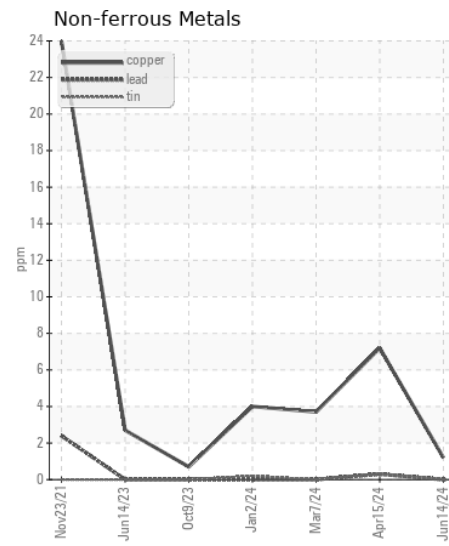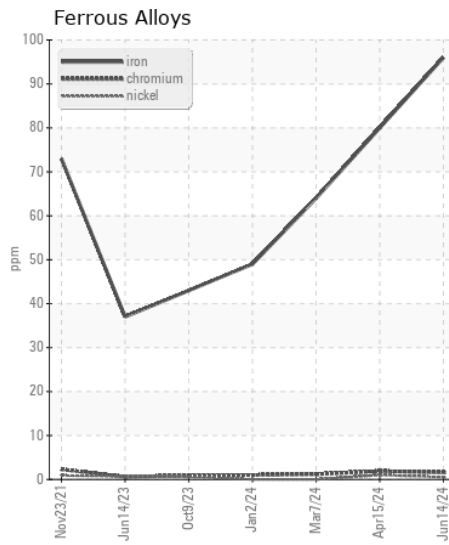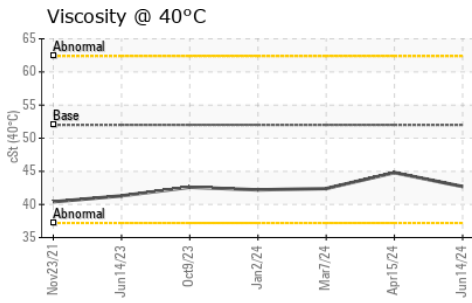

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0009809
Lab Number : 06213888
Unique Number : 11086752
Test Package : CONST
Received : 18 Jun 2024
Tested : 20 Jun 2024
Diagnosed : 20 Jun 2024 - Wes Davis

EGGER WOOD PRODUCTS
 300 EGGER PARKWAY
 LINWOOD, NC
 US 27299
 Contact: HELMUT THOMAY
 helmut.thomay@egger.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: