



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L60H 621267

Component
Rear Axle

Fluid
VOLVO SUPER WET BRAKE TRANSAXLE OIL WB102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0009803	ASC0000024	VCP296167
Sample Date		Client Info		13 Jun 2024	20 Jul 2023	03 Dec 2020
Machine Age	hrs	Client Info		7069	6070	4015
Oil Age	hrs	Client Info		999	2055	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Changed
Filter Changed		Client Info		None	N/A	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	15	30	40
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		<1	0	1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	2	2
Lead	ppm	ASTM D5185m	>50	0	<1	6
Copper	ppm	ASTM D5185m	>120	0	1	7
Tin	ppm	ASTM D5185m	>20	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	13	15	12
Potassium	ppm	ASTM D5185m	>20	1	0	4
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	8	3
Boron	ppm	ASTM D5185m		118	153	115
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		8	<1	<1
Manganese	ppm	ASTM D5185m		0	<1	1
Magnesium	ppm	ASTM D5185m		44	19	11
Calcium	ppm	ASTM D5185m		3415	4296	3954
Phosphorus	ppm	ASTM D5185m		1140	1353	1221
Zinc	ppm	ASTM D5185m		1396	1736	1538
Sulfur	ppm	ASTM D5185m		3282	4694	3538
Visc @ 40°C	cSt	ASTM D445	55	50.3	41.5	40.2

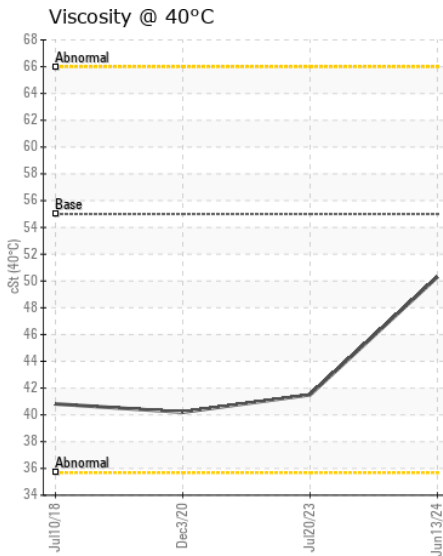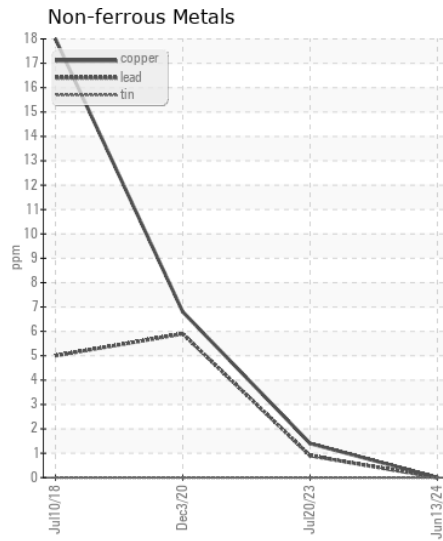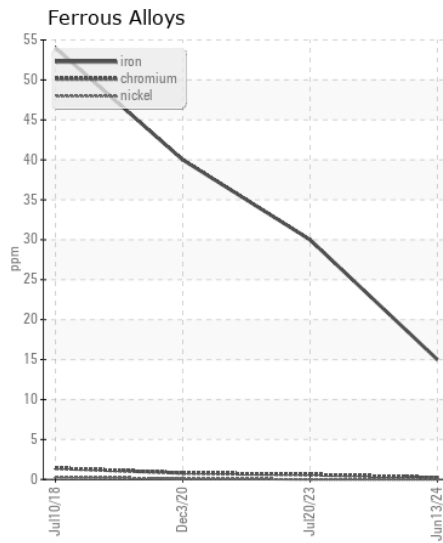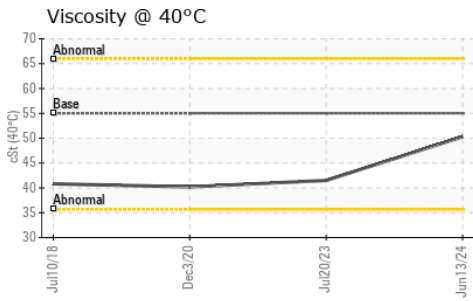

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0009803
Lab Number : 06213892
Unique Number : 11086756
Test Package : CONST

Received : 18 Jun 2024
Tested : 20 Jun 2024
Diagnosed : 20 Jun 2024 - Wes Davis

MONROE ROADWAYS
 7061 CAMP GROUND RD
 DENVER, NC
 US 28037
 Contact: TIM CATLIN

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)489-0700

F: