



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
141097-1216 LIEBHERR LH50M 141097-1216
 Component
Splitter Box
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DJJ0023789	DJJ0011150	---
Sample Date		Client Info		14 Jun 2024	13 Feb 2024	---
Machine Age	hrs	Client Info		4048	3271	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	ATTENTION	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	12	19	---
Chromium	ppm	ASTM D5185m	>2	<1	0	---
Nickel	ppm	ASTM D5185m	>2	0	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>5	2	0	---
Lead	ppm	ASTM D5185m	>2	0	0	---
Copper	ppm	ASTM D5185m	>10	<1	0	---
Tin	ppm	ASTM D5185m	>2	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>10	3	6	---
Potassium	ppm	ASTM D5185m	>20	<1	0	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	0	<1	---
Boron	ppm	ASTM D5185m	400	<1	0	---
Barium	ppm	ASTM D5185m	200	0	0	---
Molybdenum	ppm	ASTM D5185m	12	<1	0	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m	12	4	6	---
Calcium	ppm	ASTM D5185m	150	27	82	---
Phosphorus	ppm	ASTM D5185m	1650	352	421	---
Zinc	ppm	ASTM D5185m	125	17	41	---
Sulfur	ppm	ASTM D5185m	22500	13617	14770	---
Visc @ 40°C	cSt	ASTM D445	143	112	85.4	---

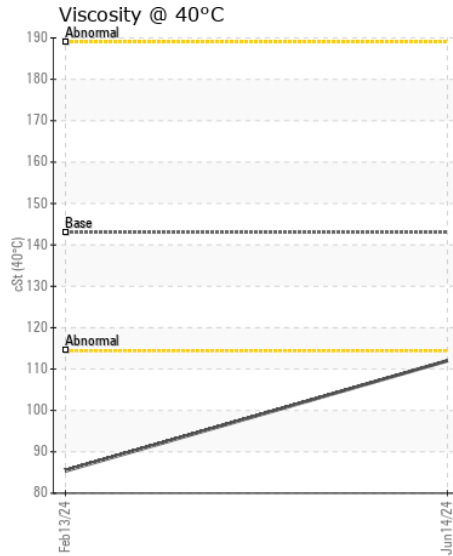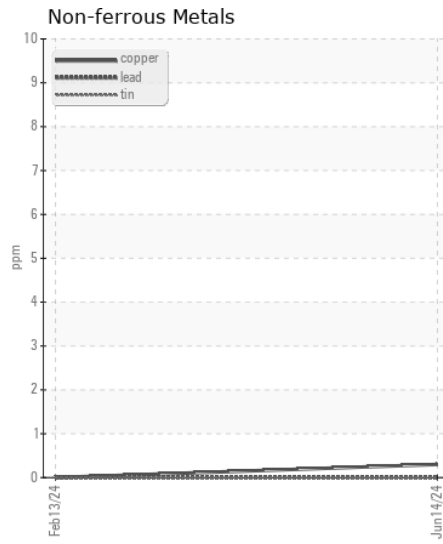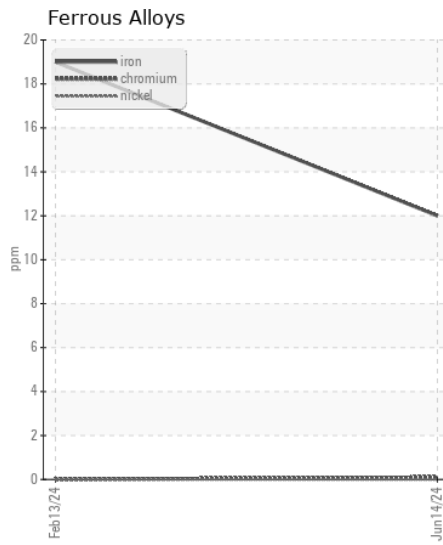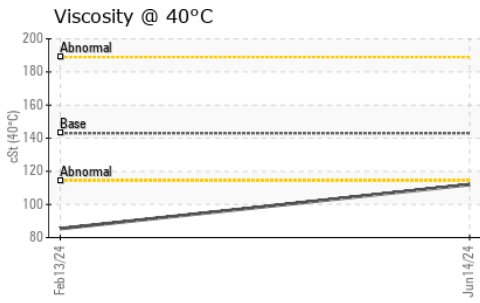

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DJJ0023789
Lab Number : 06213905
Unique Number : 11086769
Test Package : CONST

METAL RECYCLING SERVICES - GASTONIA
 5401 S YORK HWY
 GASTONIA, NC
 US 28052
 Contact: RYAN BOWDEN

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)864-9863
F: (704)864-9863