



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1720
 Component
Transmission (Auto)
 Fluid
CASTROL TRANSYND (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0887548	WC0844942	WC0766333
Sample Date		Client Info		04 Jun 2024	15 Sep 2023	06 Dec 2022
Machine Age	mls	Client Info		208270	0	164348
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	Not Changd
Filter Changed		Client Info		Changed	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
<hr/>						
Iron	ppm	ASTM D5185m	>160	51	61	35
Chromium	ppm	ASTM D5185m	>5	0	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	36	32	13
Lead	ppm	ASTM D5185m	>50	0	<1	<1
Copper	ppm	ASTM D5185m	>225	17	16	6
Tin	ppm	ASTM D5185m	>10	4	4	1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
<hr/>						
Silicon	ppm	ASTM D5185m	>20	6	6	4
Potassium	ppm	ASTM D5185m	>20	3	3	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
<hr/>						
Sodium	ppm	ASTM D5185m		5	6	2
Boron	ppm	ASTM D5185m	133	62	75	76
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	1	<1
Manganese	ppm	ASTM D5185m		<1	2	<1
Magnesium	ppm	ASTM D5185m	0	6	10	7
Calcium	ppm	ASTM D5185m	27	162	138	138
Phosphorus	ppm	ASTM D5185m	293	269	257	265
Zinc	ppm	ASTM D5185m	0	34	15	0
Sulfur	ppm	ASTM D5185m	1050	1959	1595	1719
Visc @ 40°C	cSt	ASTM D445	36.7	33.4	33.4	33.6

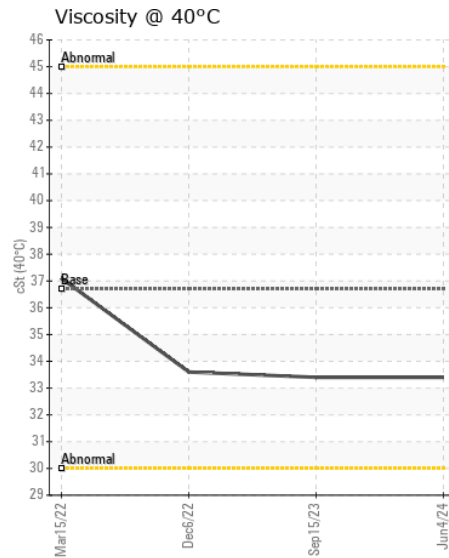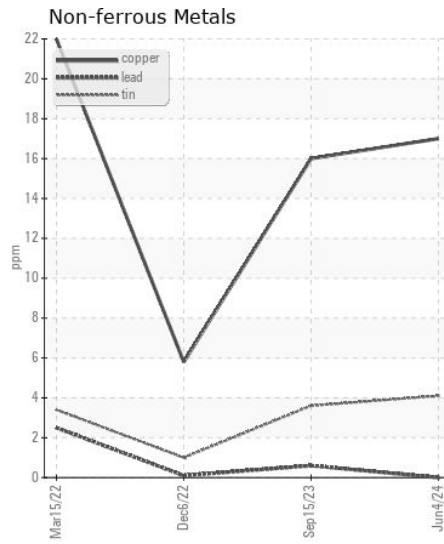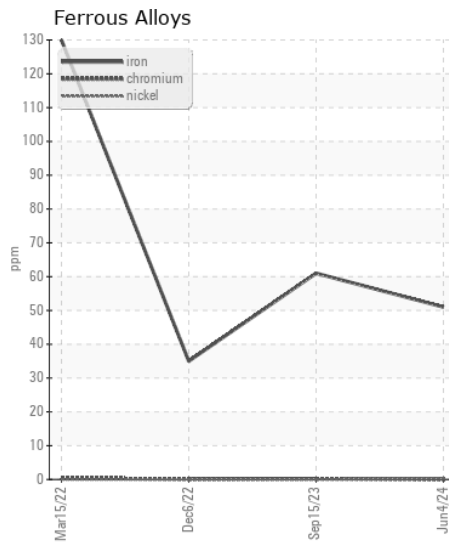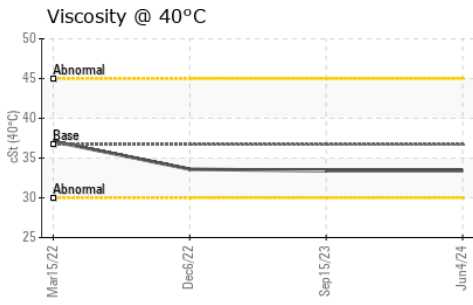

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0887548
Lab Number : 06213933
Unique Number : 11086797
Test Package : FLEET

Received : 18 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 19 Jun 2024 - Wes Davis

TOWN OF CHAPEL HILL
 6900 MILLHOUSE RD
 CHAPEL HILL, NC
 US 27516

Contact: Lisa DePasqua
 ldepasqua@townofchapelhill.org
 T: (919)696-4941

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: