



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
BEECH 14SB
 Component
Right Jet Turbine
 Fluid
BP TURBO OIL 2380 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GF0001776	GF0001128	GF0000906
Sample Date		Client Info		14 Jun 2024	22 Aug 2023	23 Feb 2023
TSN	hrs	Client Info		7725	7510	3650
TSO	hrs	Client Info		3643	3643	3643
Oil Age	hrs	Client Info		4065	3849	3643
Filter Age	hrs	Client Info		750	550	328
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>8	0	<1	0
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>2	<1	<1	<1
Lead	ppm	ASTM D5185m	>3	0	0	0
Copper	ppm	ASTM D5185m	>3	<1	<1	0
Tin	ppm	ASTM D5185m	>2	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>8	1	<1	2
Potassium	ppm	ASTM D5185m	>20	3	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	0	0
Boron	ppm	ASTM D5185m	0	3	<1	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	0	<1	2	0
Calcium	ppm	ASTM D5185m	0	0	6	7
Phosphorus	ppm	ASTM D5185m	2500	2885	2619	2558
Zinc	ppm	ASTM D5185m	0	0	3	1
Sulfur	ppm	ASTM D5185m	0	29	524	0
Visc @ 40°C	cSt	ASTM D445	24.2	23.8	24.0	26.2

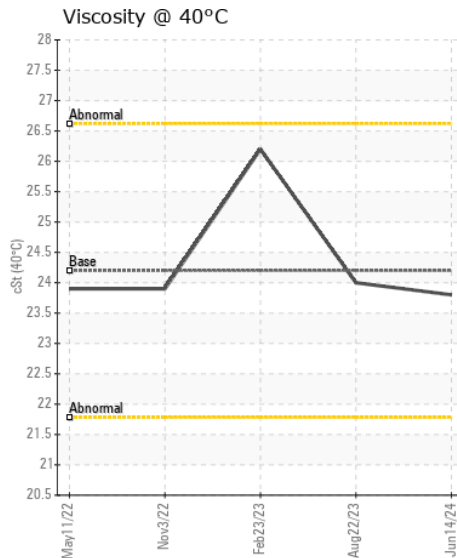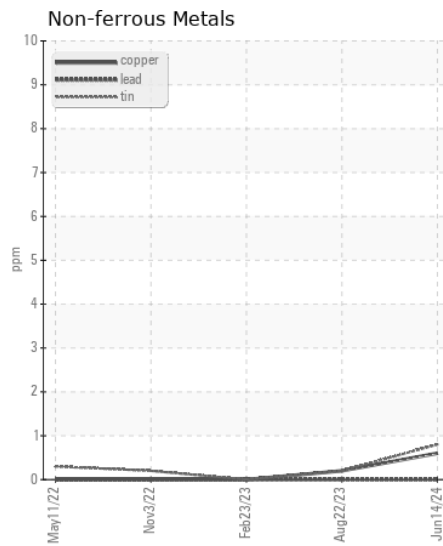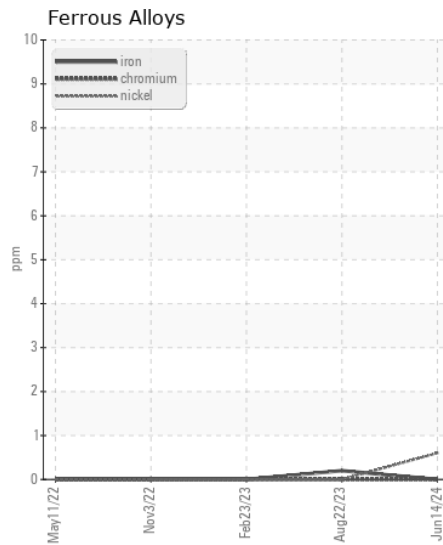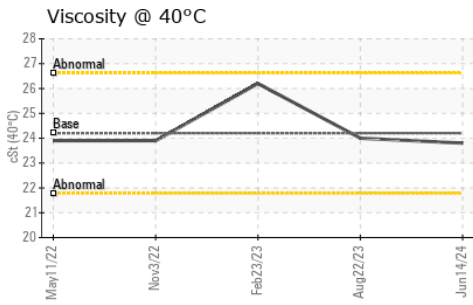

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GF0001776
Lab Number : 06213951
Unique Number : 11086815
Test Package : AVI 1

Received : 18 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 20 Jun 2024 - Sean Felton

STEVENS AEROSPACE AND DEFENSE SYSTEMS, LLC
 1280 THUNDERBIRD DR
 SMYRNA, TN
 US 37167

Contact: PATRICK ISRAEL
 pisrael@stevensaerospace.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (615)365-2132
 F: (615)365-0966