



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
3543L
 Component
Diesel Engine
 Fluid
MOBIL 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL06214151	IL0023802	IL0023822
Sample Date		Client Info		14 May 2024	20 Jun 2022	20 Dec 2021
Machine Age	mls	Client Info		160513	96693	79541
Oil Age	mls	Client Info		63820	17152	20323
Filter Age	mls	Client Info		0	17152	20323
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	16	44	34
Chromium	ppm	ASTM D5185m	>20	<1	1	1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	6	25	30
Lead	ppm	ASTM D5185m	>40	0	<1	0
Copper	ppm	ASTM D5185m	>330	1	2	2
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	6	7	9
Potassium	ppm	ASTM D5185m	>20	8	28	61
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	0.8	0.6
Nitration	Abs/cm	*ASTM D7624	>20	10.9	14.3	12
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.3	25.7	24.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>118	3	2	3
Boron	ppm	ASTM D5185m		57	30	29
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		35	42	44
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		373	501	514
Calcium	ppm	ASTM D5185m		1849	1578	1771
Phosphorus	ppm	ASTM D5185m		1114	731	773
Zinc	ppm	ASTM D5185m		1270	955	902
Sulfur	ppm	ASTM D5185m		3836	2348	2215
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.1	28.9	25
Base Number (BN)	mg KOH/g	ASTM D2896		7.0	6.4	8.9
Visc @ 100°C	cSt	ASTM D445		13.2	13.0	13.2


FT-IR (Direct Trend)

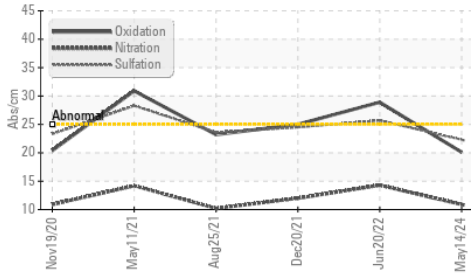


Base Number

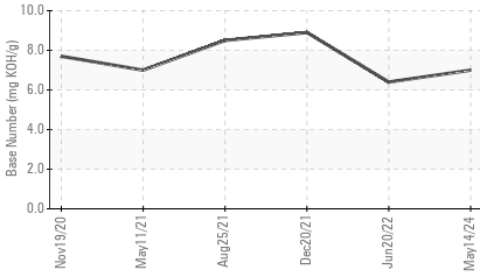


Viscosity @ 100°C

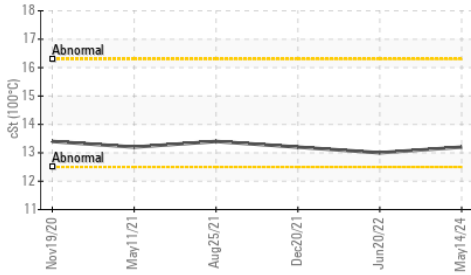


Ferrous Alloys

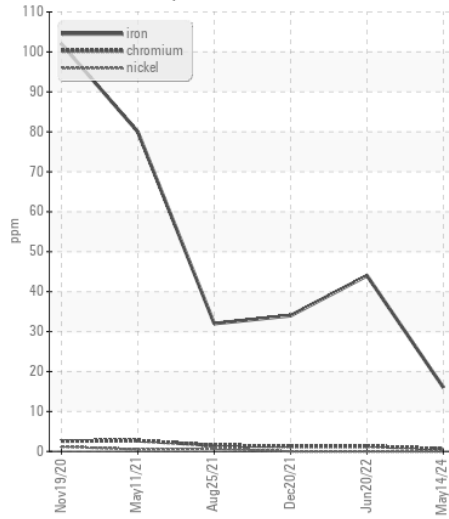


Non-ferrous Metals

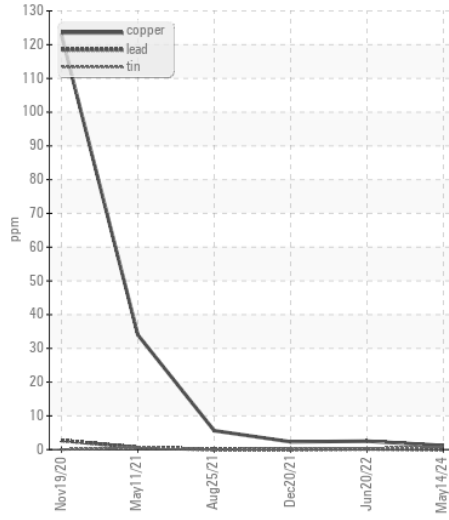

Viscosity @ 100°C

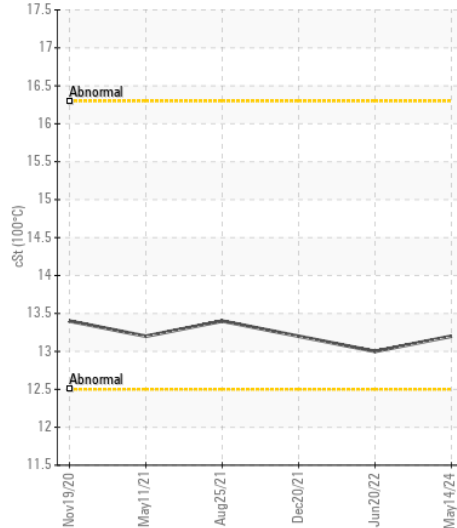

Base Number

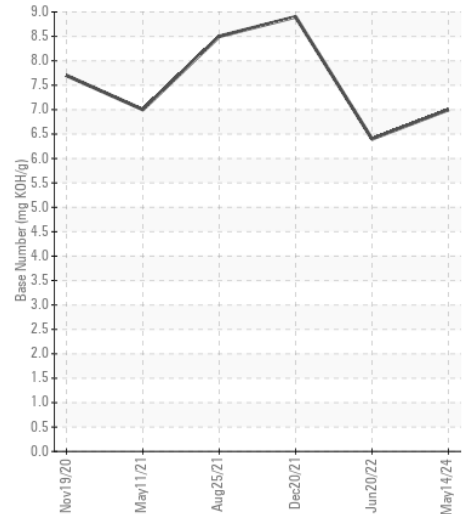

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL06214151
Lab Number : 06214151
Unique Number : 11087015
Test Package : FLEET

Received : 18 Jun 2024
Tested : 20 Jun 2024
Diagnosed : 20 Jun 2024 - Wes Davis

RUSH TRUCK CENTER - CHICAGO IDEALEASE
 4655 SOUTH CENTRAL AVENUE
 CHICAGO, IL
 US 60638
 Contact: BRUCE VAUGHN
 VaughnB@RushEnterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: (708)496-8818