



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
8464859
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0020534	RPL0016033	---
Sample Date		Client Info		07 Jun 2024	08 Dec 2023	---
Machine Age	mls	Client Info		28705	18263	---
Oil Age	mls	Client Info		0	18263	---
Filter Age	mls	Client Info		0	18263	---
Oil Changed		Client Info		N/A	Not Changd	---
Filter Changed		Client Info		N/A	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	13	38	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	3	8	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>330	2	13	---
Tin	ppm	ASTM D5185m	>15	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	5	14	---
Potassium	ppm	ASTM D5185m	>20	3	8	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	7.8	11.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.7	24.7	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>158	2	4	---
Boron	ppm	ASTM D5185m	250	49	95	---
Barium	ppm	ASTM D5185m	10	0	0	---
Molybdenum	ppm	ASTM D5185m	100	47	103	---
Manganese	ppm	ASTM D5185m		1	8	---
Magnesium	ppm	ASTM D5185m	450	509	620	---
Calcium	ppm	ASTM D5185m	3000	1573	1387	---
Phosphorus	ppm	ASTM D5185m	1150	786	640	---
Zinc	ppm	ASTM D5185m	1350	896	794	---
Sulfur	ppm	ASTM D5185m	4250	2247	2490	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.7	23.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.1	4.1	---
Visc @ 100°C	cSt	ASTM D445	14.4	12.6	12.8	---

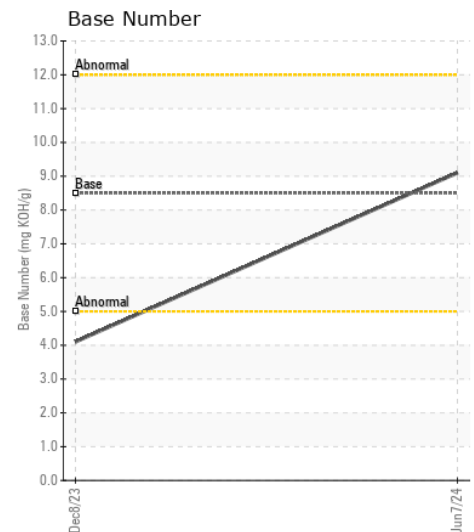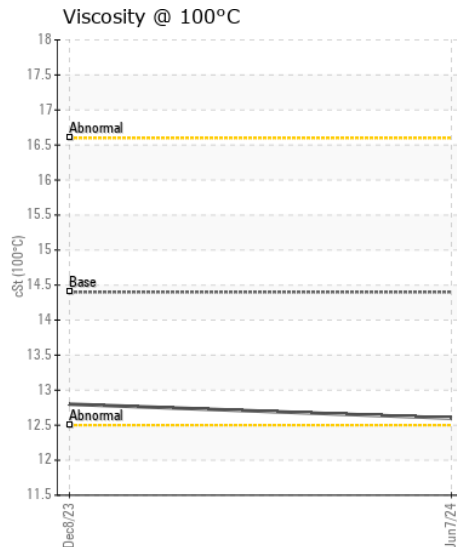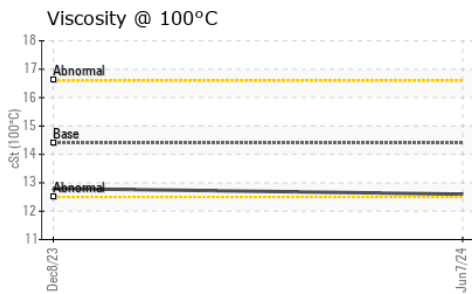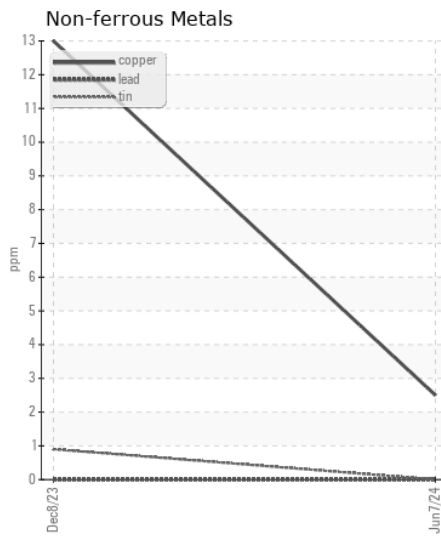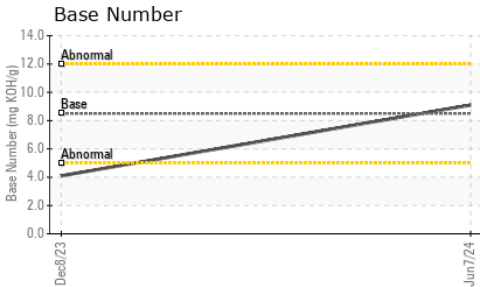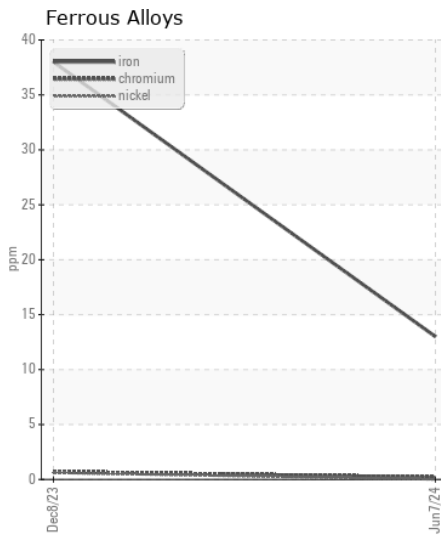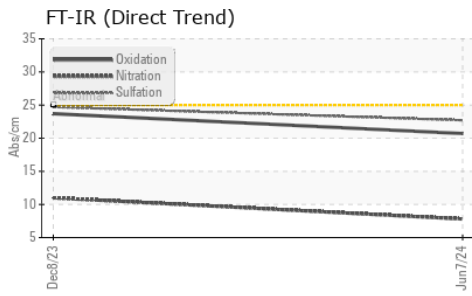

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RPL0020534

Lab Number : 06214190

Unique Number : 11087054

Test Package : FLEET

Received : 19 Jun 2024

Tested : 21 Jun 2024

Diagnosed : 21 Jun 2024 - Sean Felton

RTL PACLEASE - 7007 - Fontana

3121 South Riverside

Bloomington, CA

US 92316

Contact: Rudy Trevizo

TrevizoR@RushEnterprises.Com

T: (909)829-1044

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)