



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
TRACKMOBILE 9049
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0917149	WC0878732	---
Sample Date		Client Info		17 May 2024	12 Jan 2024	---
Machine Age	hrs	Client Info		15020	15020	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	21	7	---
Chromium	ppm	ASTM D5185m	>20	2	<1	---
Nickel	ppm	ASTM D5185m	>4	0	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	5	2	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	4	<1	---
Tin	ppm	ASTM D5185m	>15	0	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	12	14	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	6.0	5.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.5	15.5	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<1	<1	---
Boron	ppm	ASTM D5185m	250	5	2	---
Barium	ppm	ASTM D5185m	10	0	0	---
Molybdenum	ppm	ASTM D5185m	100	57	7	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m	450	881	123	---
Calcium	ppm	ASTM D5185m	3000	1112	1959	---
Phosphorus	ppm	ASTM D5185m	1150	1052	895	---
Zinc	ppm	ASTM D5185m	1350	1203	1033	---
Sulfur	ppm	ASTM D5185m	4250	2966	3526	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.2	9.2	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.6	7.9	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.7	14.6	---

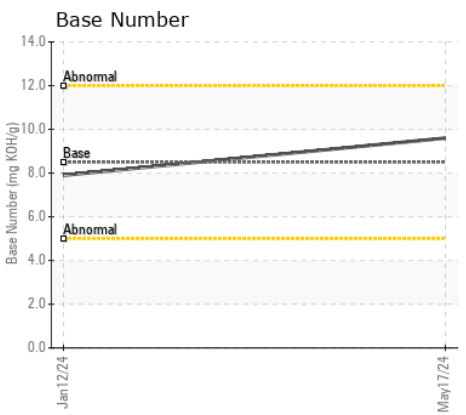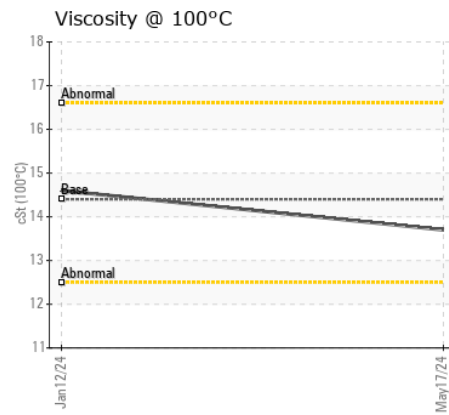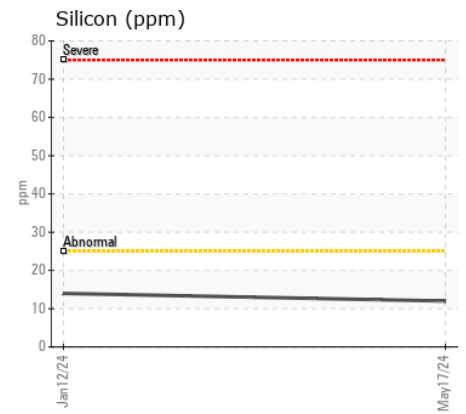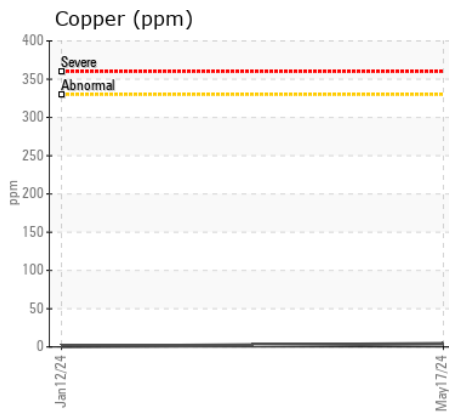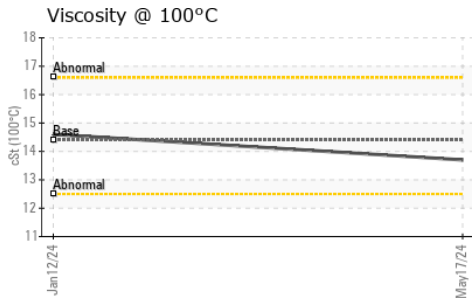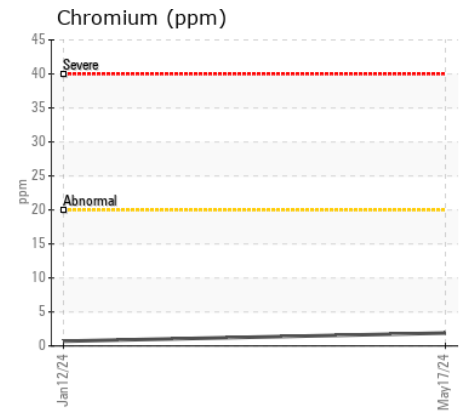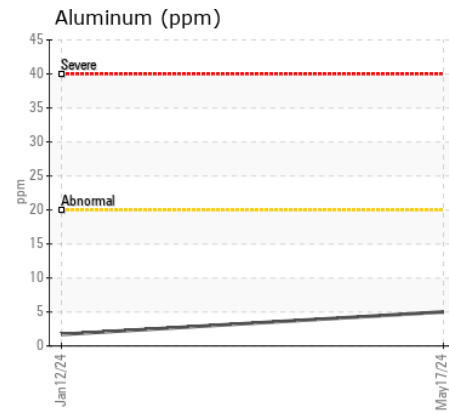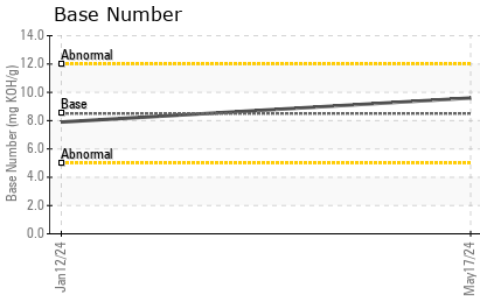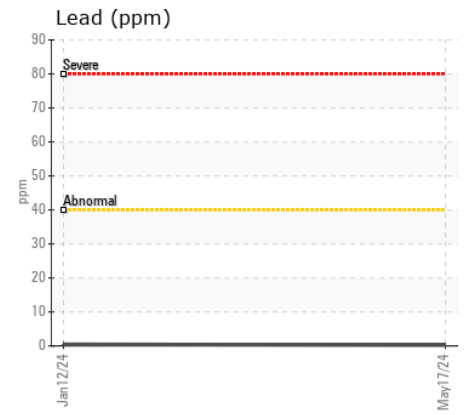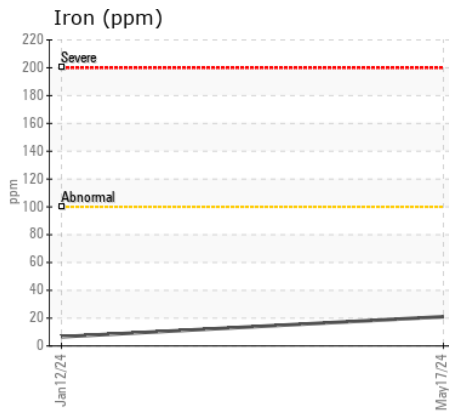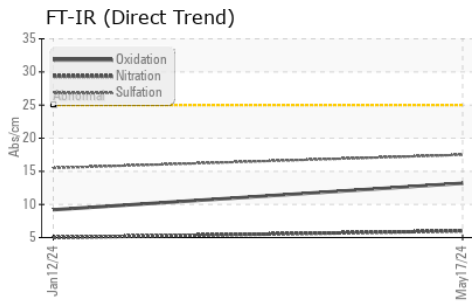

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0917149 **Received** : 19 Jun 2024
Lab Number : 06214265 **Tested** : 20 Jun 2024
Unique Number : 11087129 **Diagnosed** : 20 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

CONCRETE SERVICE CO - FAY BLOCK
 161 BUILDERS BLVD
 FAYETTEVILLE, NC
 US 28301
 Contact: BRYAN VANNIMAN
 bryanvanniman@fayblock.com
 T: (800)326-9198
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)