



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
OSHKOSH MIXER 4416
 Component
Diesel Engine
 Fluid
MOBIL 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0917157	WC0906087	---
Sample Date		Client Info		29 May 2024	14 Mar 2024	---
Machine Age	mls	Client Info		41227	37587	---
Oil Age	mls	Client Info		0	0	---
Filter Age	mls	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	<1	3	---
Chromium	ppm	ASTM D5185m	>20	0	<1	---
Nickel	ppm	ASTM D5185m	>4	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	0	<1	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>330	0	0	---
Tin	ppm	ASTM D5185m	>15	0	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	2	3	---
Potassium	ppm	ASTM D5185m	>20	<1	0	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	4.9	7.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.0	19.0	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>118	<1	0	---
Boron	ppm	ASTM D5185m		3	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		49	62	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m		831	1069	---
Calcium	ppm	ASTM D5185m		1029	1191	---
Phosphorus	ppm	ASTM D5185m		953	1131	---
Zinc	ppm	ASTM D5185m		1108	1349	---
Sulfur	ppm	ASTM D5185m		3368	3956	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.0	15.2	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.9	7.9	---
Visc @ 100°C	cSt	ASTM D445		13.8	14.2	---

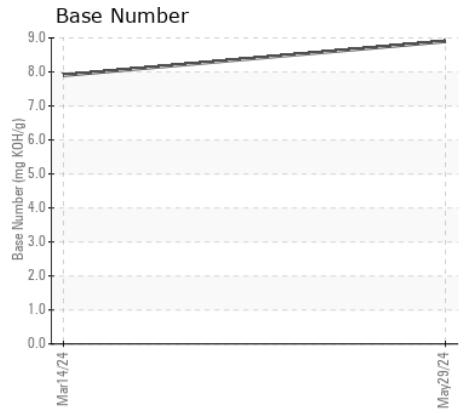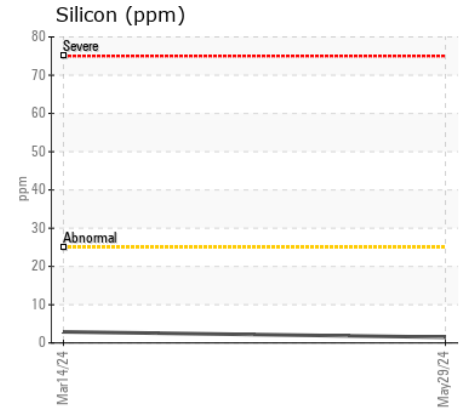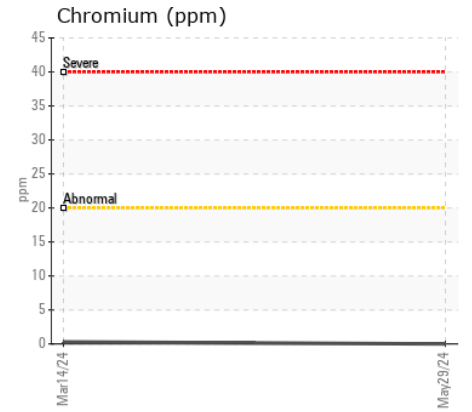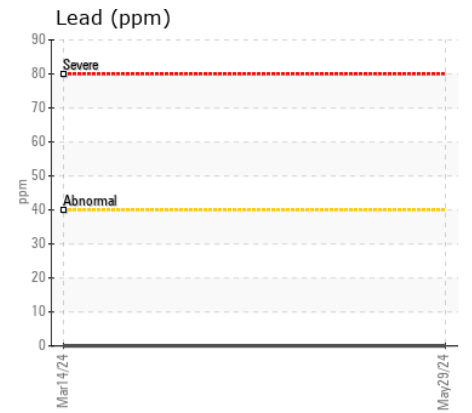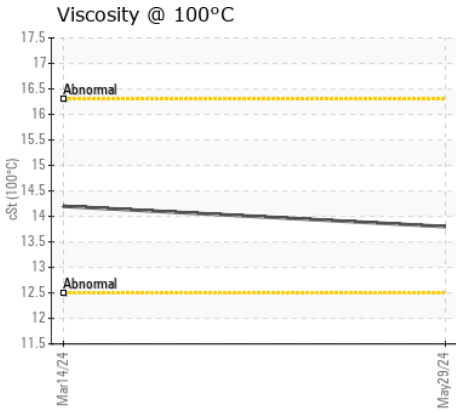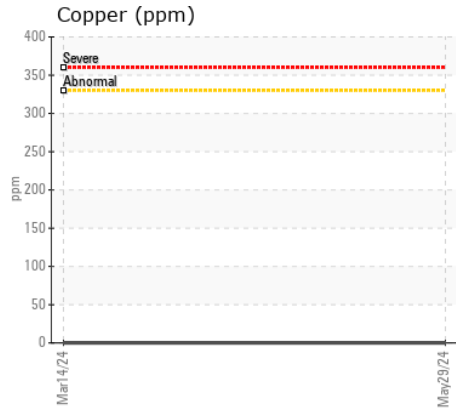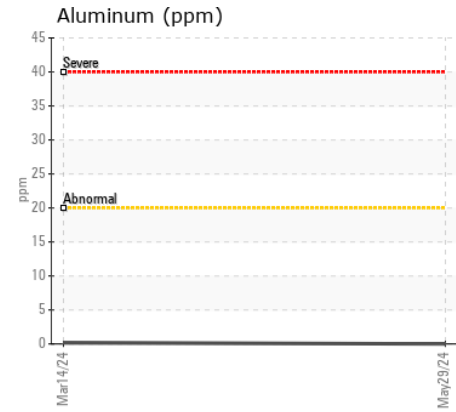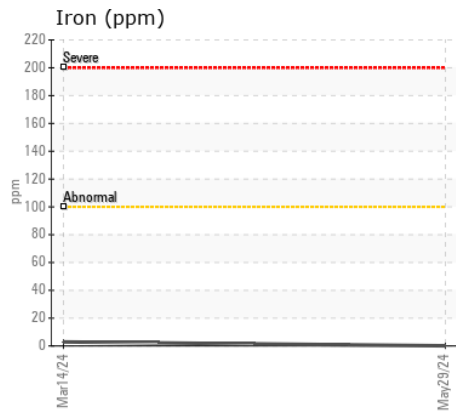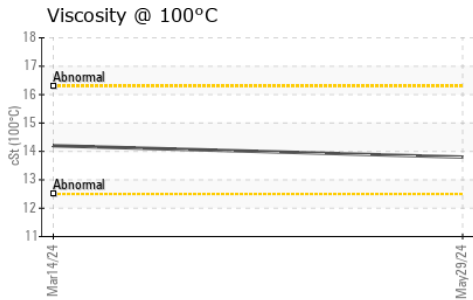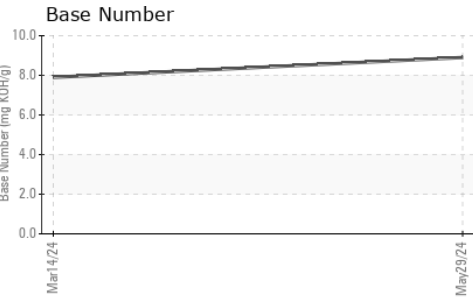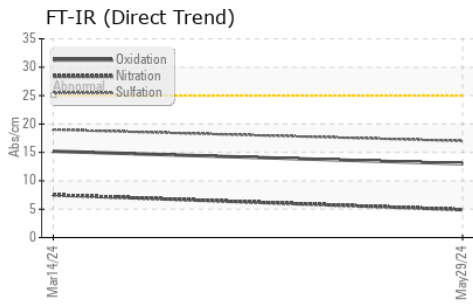

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0917157 **Received** : 19 Jun 2024
Lab Number : 06214282 **Tested** : 20 Jun 2024
Unique Number : 11087146 **Diagnosed** : 20 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

CONCRETE SERVICE CO - FAY BLOCK
 161 BUILDERS BLVD
 FAYETTEVILLE, NC
 US 28301
 Contact: BRYAN VANNIMAN
 bryanvanniman@fayblock.com
 T: (800)326-9198
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)