



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**GIL WALKER [DANIEL/503209]**

Machine Id  
**VOLVO PENTA A721573**

Component  
**Starboard Diesel Engine**

Fluid  
**VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (6 GAL)**

**RECOMMENDATION**

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VPA061740</b>	VPA043320	---
Sample Date		Client Info		<b>14 Jun 2024</b>	19 Oct 2022	---
Machine Age	hrs	Client Info		<b>660</b>	543	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Chngd</b>	N/A	---
Filter Changed		Client Info		<b>Not Chngd</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	<b>13</b>	12	---
Chromium	ppm	ASTM D5185m	>6	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	2	---
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	---
Lead	ppm	ASTM D5185m	>95	<b>&lt;1</b>	1	---
Copper	ppm	ASTM D5185m	>85	<b>6</b>	8	---
Tin	ppm	ASTM D5185m	>9	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	5	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	---
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844		<b>0.4</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.2</b>	6.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.2</b>	20.7	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	2	---
Boron	ppm	ASTM D5185m	2.5	<b>0</b>	5	---
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	0.7	<b>56</b>	56	---
Manganese	ppm	ASTM D5185m	0.0	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m	256	<b>945</b>	875	---
Calcium	ppm	ASTM D5185m	2057	<b>1079</b>	1098	---
Phosphorus	ppm	ASTM D5185m	935	<b>1032</b>	973	---
Zinc	ppm	ASTM D5185m	1223	<b>1202</b>	1187	---
Sulfur	ppm	ASTM D5185m	4079	<b>3671</b>	3560	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.0</b>	15.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	<b>9.9</b>	11.2	---
Visc @ 100°C	cSt	ASTM D445	15.0	<b>13.4</b>	13.5	---

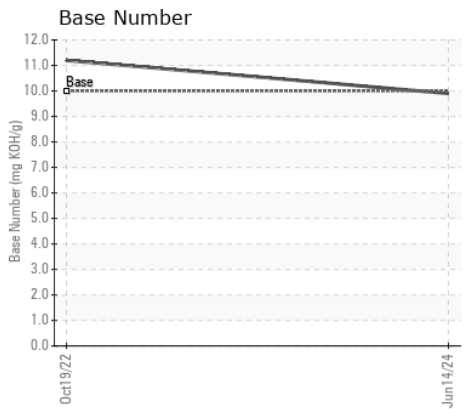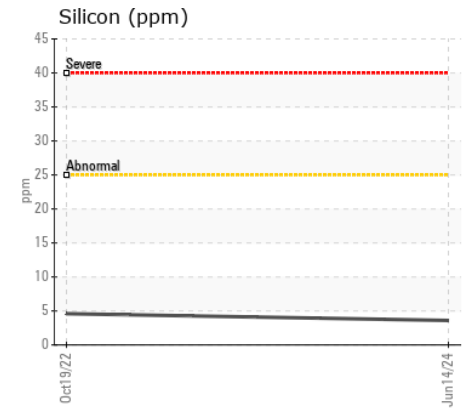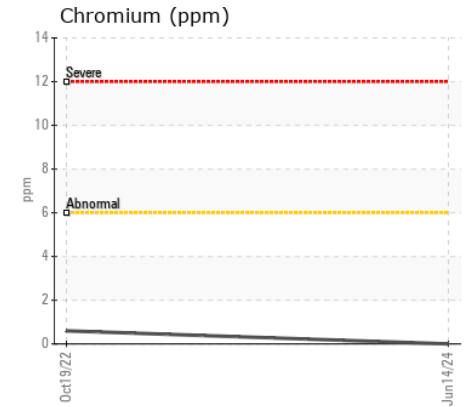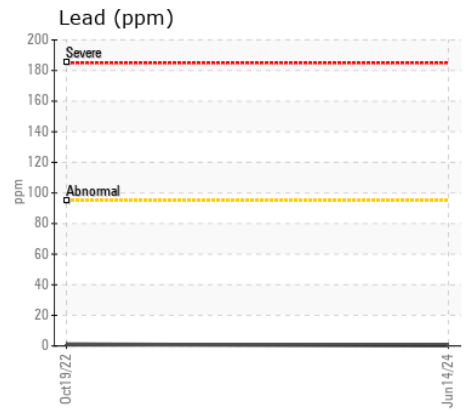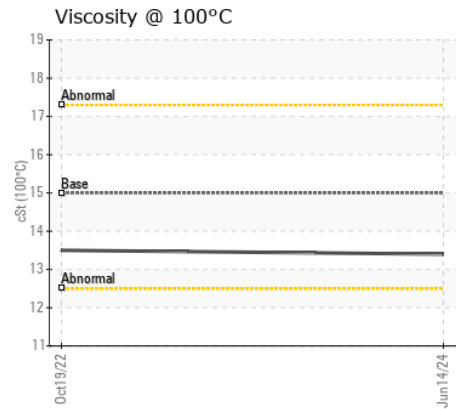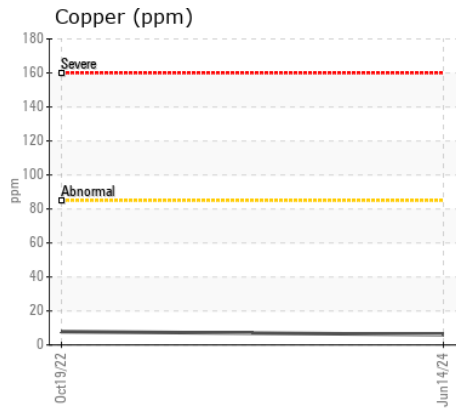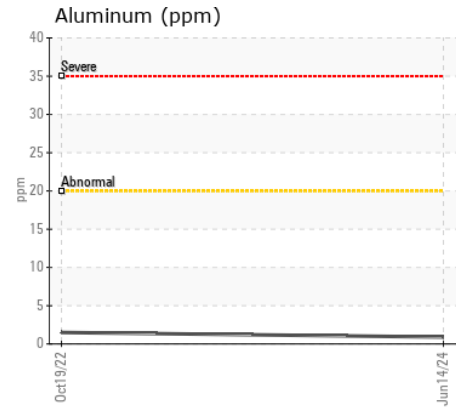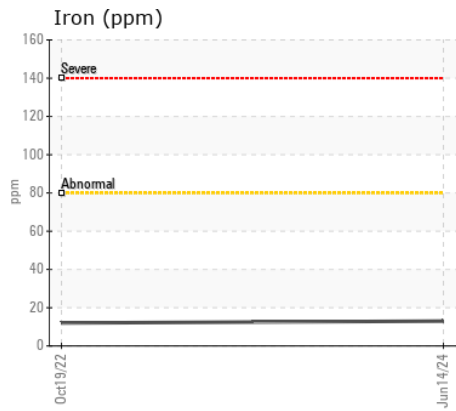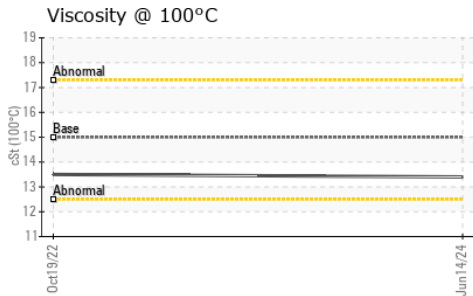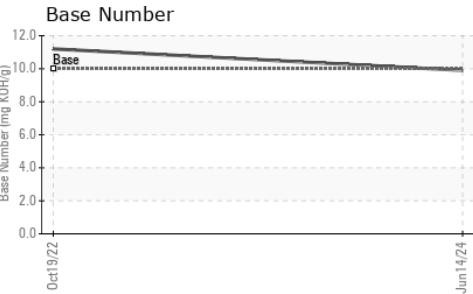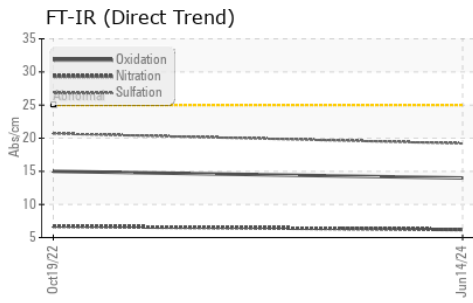

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VPA061740 **Received** : 19 Jun 2024  
**Lab Number** : 06214314 **Tested** : 20 Jun 2024  
**Unique Number** : 11087178 **Diagnosed** : 20 Jun 2024 - Sean Felton  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**Endor Marine LLC - Coastal Marine - 152124**  
 4300 11th Ave. NW  
 SEATTLE, WA  
 US 98107  
 Contact: WILLOW YANARELLA  
 service@coastalmarineengine.com  
 T: (206)784-3703  
 F: (206)784-8823

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)