



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id  
**VOLVO EC380EL 315603**  
Component  
**Diesel Engine**  
Fluid  
**VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)**

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP447789	VCP437749	---
Sample Date		Client Info		17 Jun 2024	12 Feb 2024	---
Machine Age	hrs	Client Info		2091	1177	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				ATTENTION	ABNORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	6	15	---
Chromium	ppm	ASTM D5185m	>20	0	0	---
Nickel	ppm	ASTM D5185m	>2	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	2	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>330	23	▲ 161	---
Tin	ppm	ASTM D5185m	>15	0	2	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

## CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	▲ 21	---
Potassium	ppm	ASTM D5185m	>20	<1	2	---
Fuel	%	ASTM D3524	>6.0	<1.0	0.5	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	9.1	8.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.5	22.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

## FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		2	1	---
Boron	ppm	ASTM D5185m	2.5	9	25	---
Barium	ppm	ASTM D5185m	0.0	0	<1	---
Molybdenum	ppm	ASTM D5185m	0.7	37	31	---
Manganese	ppm	ASTM D5185m	0.0	<1	2	---
Magnesium	ppm	ASTM D5185m	256	397	88	---
Calcium	ppm	ASTM D5185m	2057	1676	2164	---
Phosphorus	ppm	ASTM D5185m	935	842	958	---
Zinc	ppm	ASTM D5185m	1223	974	1124	---
Sulfur	ppm	ASTM D5185m	4079	2987	3091	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.0	15.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	6.9	4.3	---
Visc @ 100°C	cSt	ASTM D445	15.0	● 12.0	11.8	---

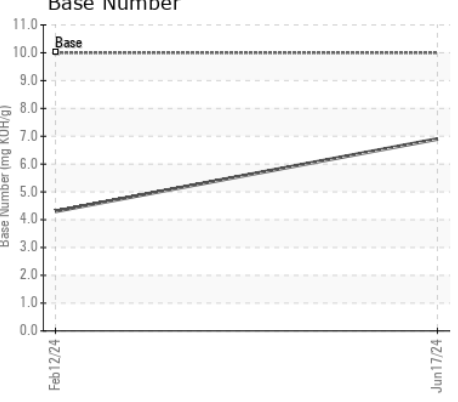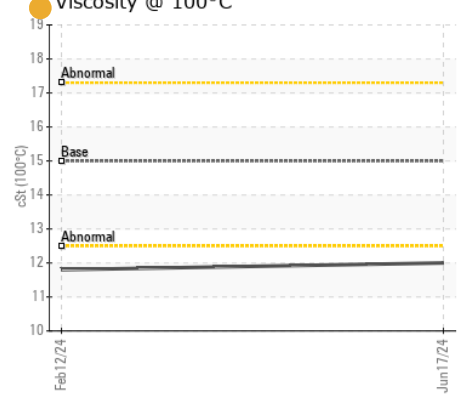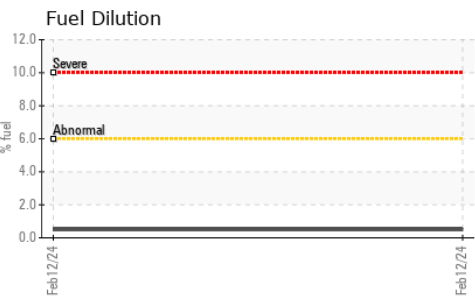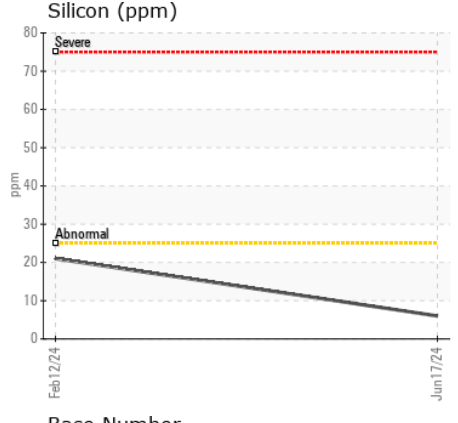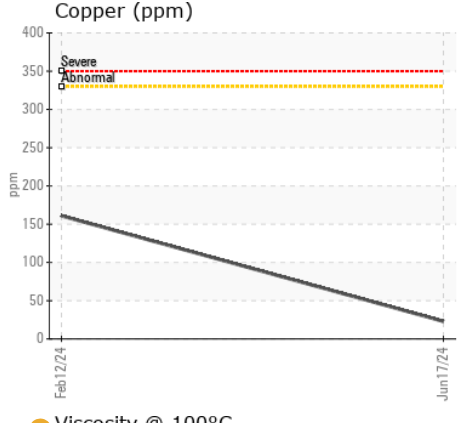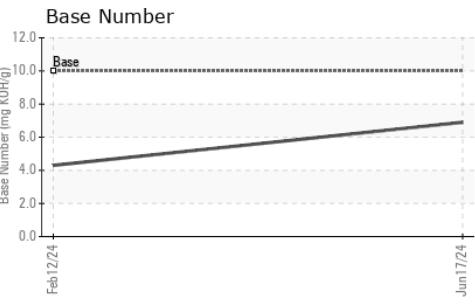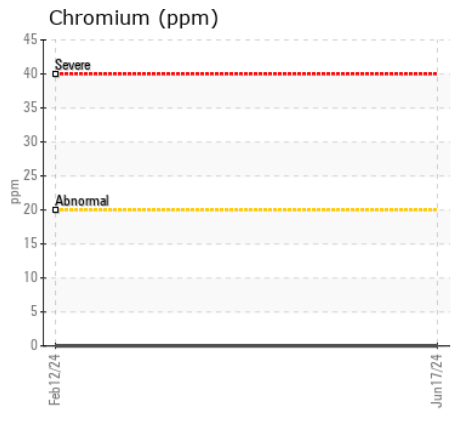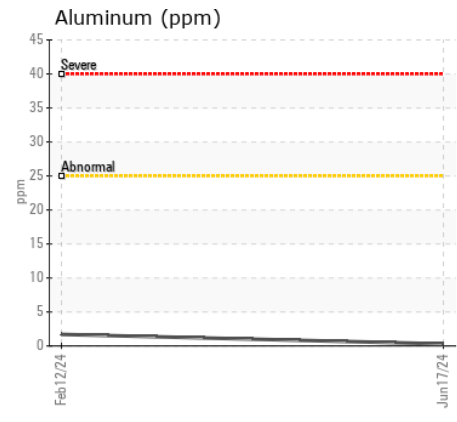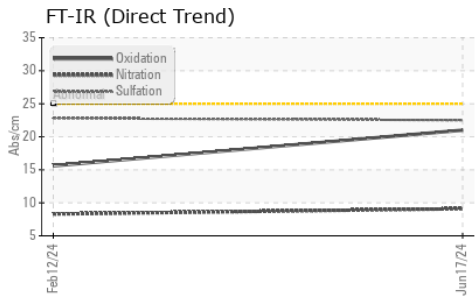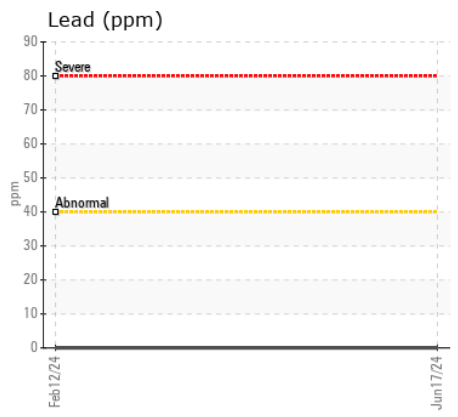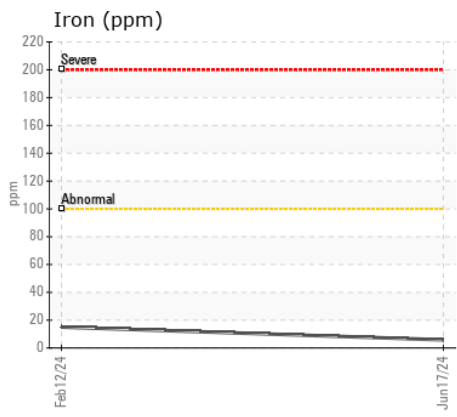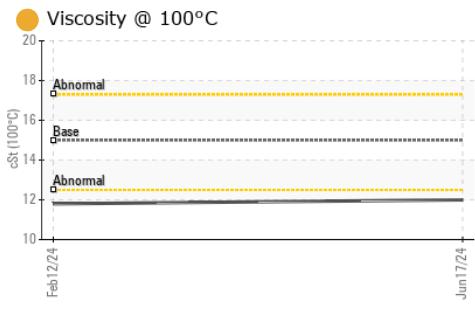

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP447789 **Received** : 19 Jun 2024  
**Lab Number** : 06214338 **Tested** : 20 Jun 2024  
**Unique Number** : 11087202 **Diagnosed** : 21 Jun 2024 - Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, TBN )

**ALTA EQUIPMENT COMPANY**  
 5151 DR MARTIN LUTHER KING BLVD  
 FORT MYERS, FL  
 US 33905  
 Contact: TODD LARK  
 tlark@altaequipfl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (239)481-3302