



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[717812]

Machine Id

VOLVO A40G 341242

Component

Diesel Engine

Fluid

VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP447781	VCP452277	VCP416183
Sample Date		Client Info		04 Jun 2024	19 Dec 2023	24 Jul 2023
Machine Age	hrs	Client Info		11389	10855	10371
Oil Age	hrs	Client Info		500	500	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ATTENTION	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	5	5	5
Chromium	ppm	ASTM D5185m	>20	0	<1	0
Nickel	ppm	ASTM D5185m	>2	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	<1	<1
Lead	ppm	ASTM D5185m	>40	0	<1	<1
Copper	ppm	ASTM D5185m	>330	0	1	1
Tin	ppm	ASTM D5185m	>15	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	3	4	3
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Fuel		WC Method	>6.0	<1.0	0.4	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	7.0	6.6	6.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.9	17.7	17.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	1	2
Boron	ppm	ASTM D5185m	2.5	0	0	0
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.7	56	58	58
Manganese	ppm	ASTM D5185m	0.0	0	<1	<1
Magnesium	ppm	ASTM D5185m	256	931	947	961
Calcium	ppm	ASTM D5185m	2057	1116	1011	1042
Phosphorus	ppm	ASTM D5185m	935	1047	1045	1009
Zinc	ppm	ASTM D5185m	1223	1192	1236	1225
Sulfur	ppm	ASTM D5185m	4079	3660	3068	3616
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	13.7	13.4
Base Number (BN)	mg KOH/g	ASTM D2896	10	9.3	8.9	9.2
Visc @ 100°C	cSt	ASTM D445	15.0	12.5	12.2	13.1

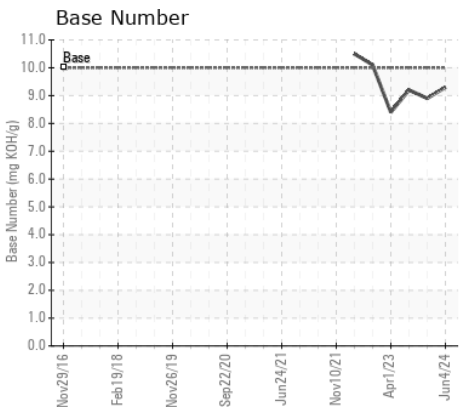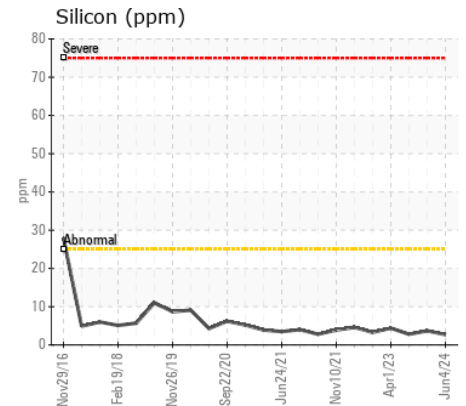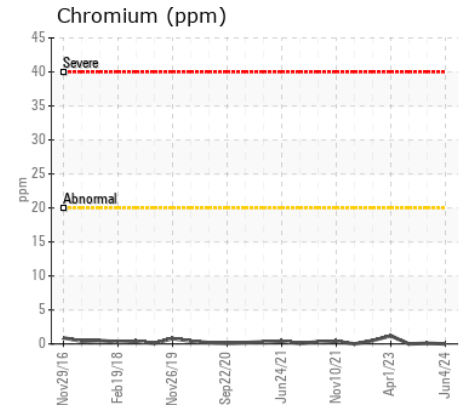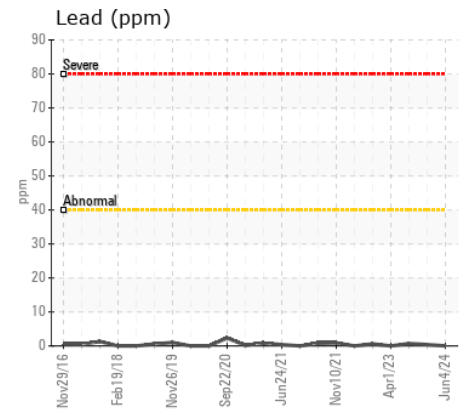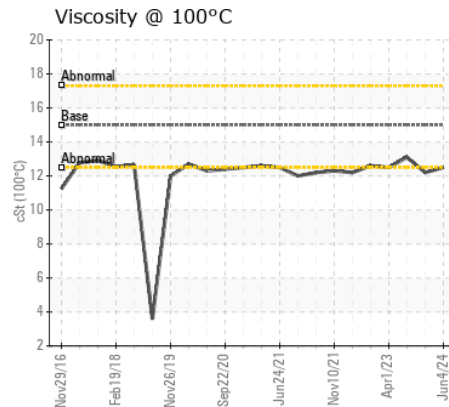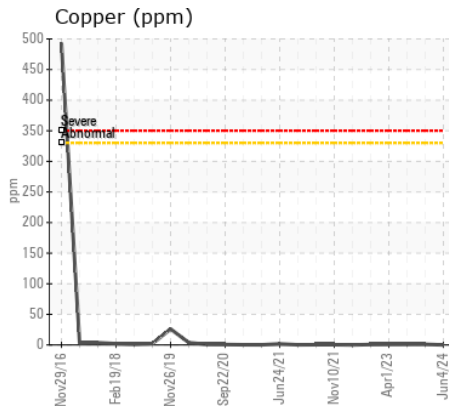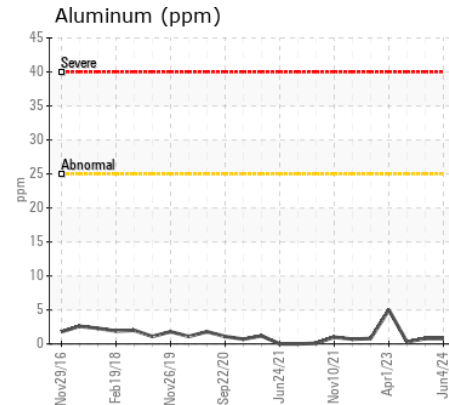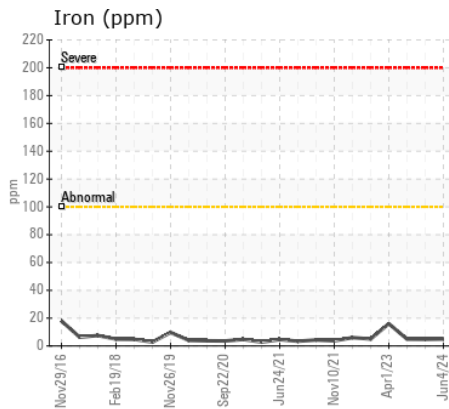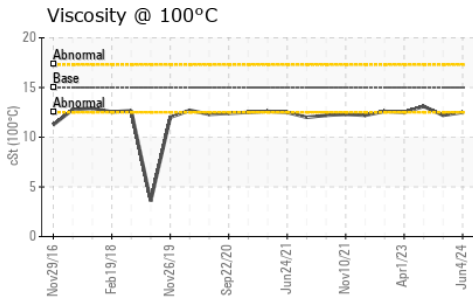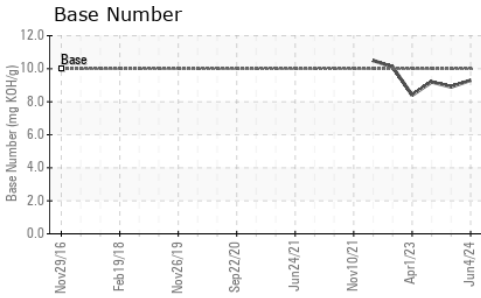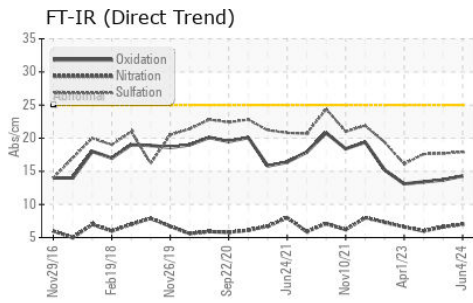

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP447781 **Received** : 19 Jun 2024
Lab Number : 06214353 **Tested** : 20 Jun 2024
Unique Number : 11087217 **Diagnosed** : 21 Jun 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

BLAZE CONSTRUCTION
 5640 ST JEAN ST
 DETROIT, MI
 US 48213
 Contact: DAVE WARD
 dward@blazecontracting.net
 T: (248)632-2317
 F: