



VOLVO

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area

[717807]

Machine Id

VOLVO A40G 341228

Component

Diesel Engine

Fluid

VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP447778	VCP396906	VCP384826
Sample Date		Client Info		04 Jun 2024	29 Dec 2022	04 Sep 2022
Machine Age	hrs	Client Info		11401	9883	9463
Oil Age	hrs	Client Info		500	500	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

The copper level is abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	16	4	4
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	<1	<1
Lead	ppm	ASTM D5185m	>40	2	2	<1
Copper	ppm	ASTM D5185m	>20	▲ 37	<1	<1
Tin	ppm	ASTM D5185m	>20	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Fuel content negligible. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	4	4	3
Potassium	ppm	ASTM D5185m	>20	<1	2	2
Fuel	%	ASTM D3524	>3.0	2.1	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.1	0.2
Nitration	Abs/cm	*ASTM D7624	>20	11.9	7.5	8.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.8	17.9	20.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		6	<1	0
Boron	ppm	ASTM D5185m	2.5	6	2	6
Barium	ppm	ASTM D5185m	0.0	0	0	2
Molybdenum	ppm	ASTM D5185m	0.7	50	61	58
Manganese	ppm	ASTM D5185m	0.0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	256	794	1049	899
Calcium	ppm	ASTM D5185m	2057	1158	1208	1135
Phosphorus	ppm	ASTM D5185m	935	836	1103	1020
Zinc	ppm	ASTM D5185m	1223	1073	1393	1221
Sulfur	ppm	ASTM D5185m	4079	2837	4043	3446
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.1	14.1	16.1
Base Number (BN)	mg KOH/g	ASTM D2896	10	4.9	9.3	10.1
Visc @ 100°C	cSt	ASTM D445	15.0	● 12.1	12.6	12.3


▲ Non-ferrous Metals

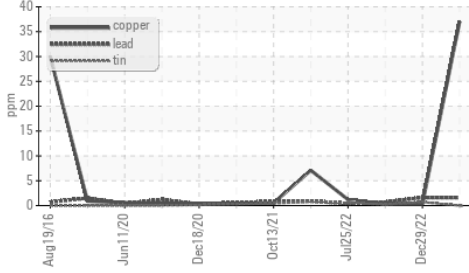


● Viscosity @ 100°C

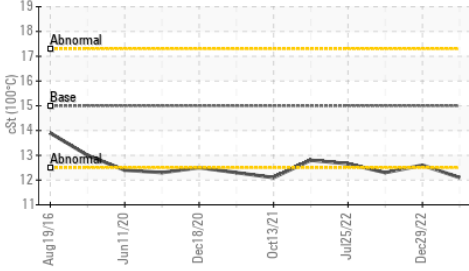


Iron (ppm)

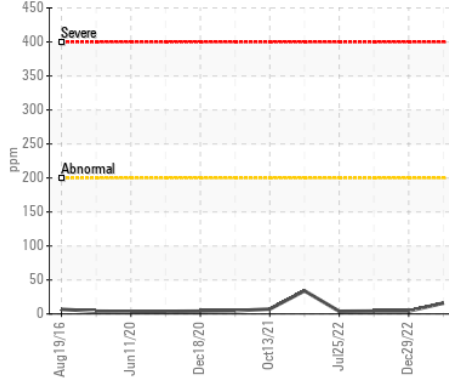


Lead (ppm)

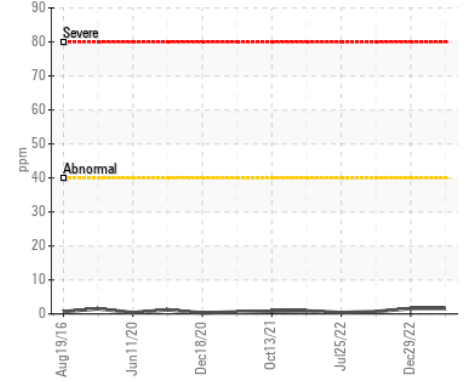


Fuel Dilution

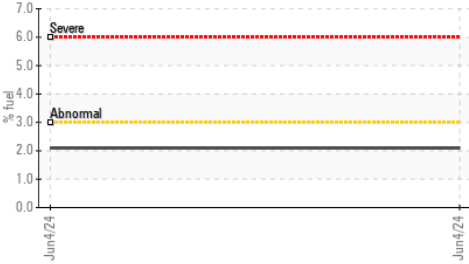


Aluminum (ppm)

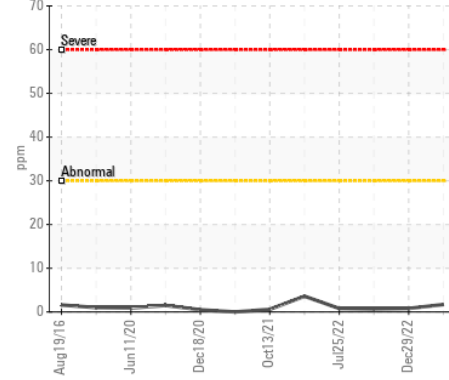


Chromium (ppm)

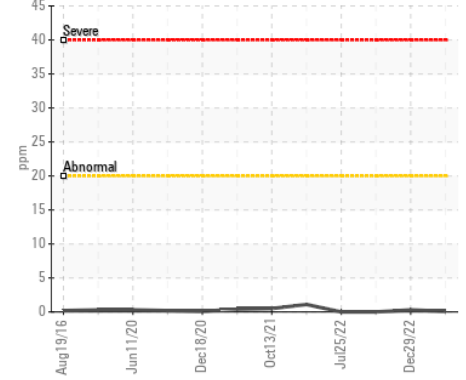


FT-IR (Direct Trend)

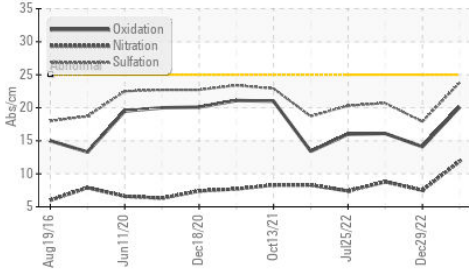


▲ Copper (ppm)

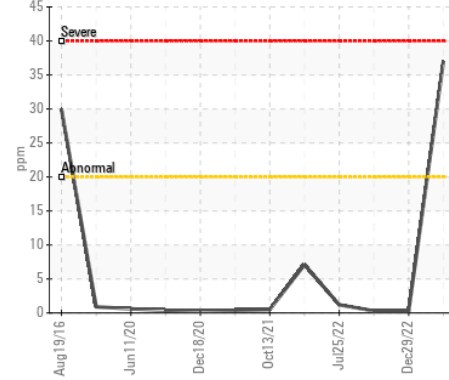


Silicon (ppm)

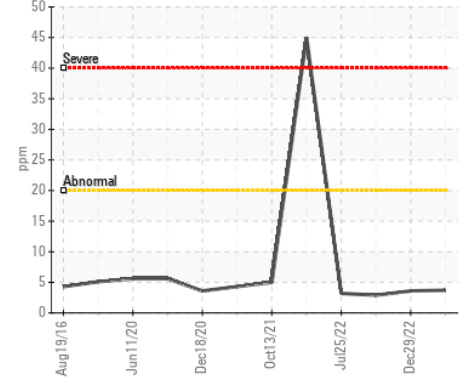


Base Number

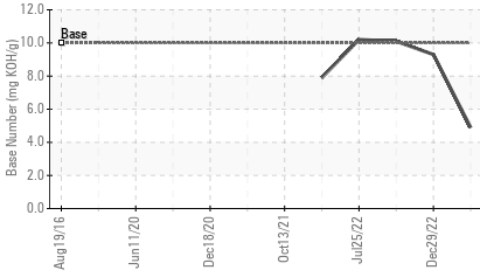

● Viscosity @ 100°C

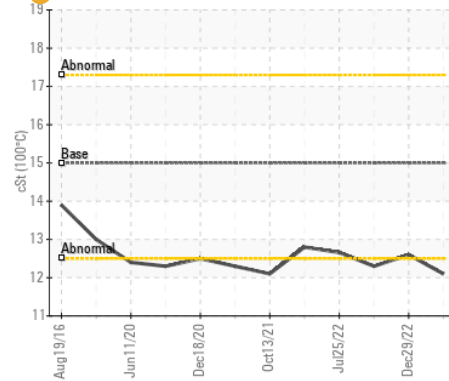

Base Number

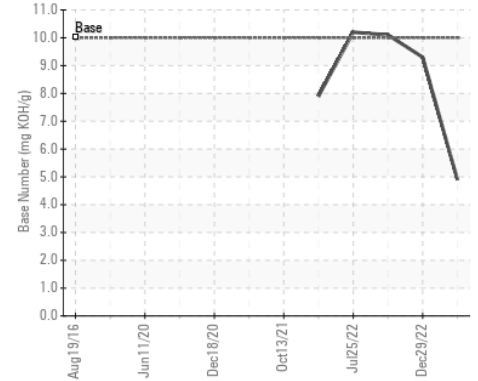

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP447778 **Received** : 19 Jun 2024
Lab Number : 06214356 **Tested** : 21 Jun 2024
Unique Number : 11087220 **Diagnosed** : 21 Jun 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

BLAZE CONSTRUCTION
 5640 ST JEAN ST
 DETROIT, MI
 US 48213
 Contact: DAVE WARD
 dward@blazecontracting.net
 T: (248)632-2317
 F: