



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**F-68**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 SDE SAE 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0849498</b>	WC0920329	WC0899767
Sample Date		Client Info		<b>12 Jun 2024</b>	29 Apr 2024	07 Mar 2024
Machine Age	hrs	Client Info		<b>5535</b>	5213	4818
Oil Age	hrs	Client Info		<b>322</b>	395	937
Filter Age	hrs	Client Info		<b>322</b>	395	937
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>8</b>	12	11
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>80</b>	82	84
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	1	1
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>0</b>	0	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>5</b>	5	4
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	<1	0
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.8	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.8</b>	9.1	8.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.6</b>	20.3	20.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	1	1
Boron	ppm	ASTM D5185m		<b>84</b>	93	102
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>2</b>	2	1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>415</b>	425	402
Calcium	ppm	ASTM D5185m		<b>1806</b>	1928	1834
Phosphorus	ppm	ASTM D5185m	760	<b>1048</b>	1055	1050
Zinc	ppm	ASTM D5185m	800	<b>1251</b>	1282	1188
Sulfur	ppm	ASTM D5185m	3000	<b>4607</b>	4643	4417
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.4</b>	15.1	15.3
Base Number (BN)	mg KOH/g	ASTM D2896	10	<b>7.9</b>	7.8	8.1
Visc @ 100°C	cSt	ASTM D445	14.6	<b>14.4</b>	13.8	14.2


**FT-IR (Direct Trend)**

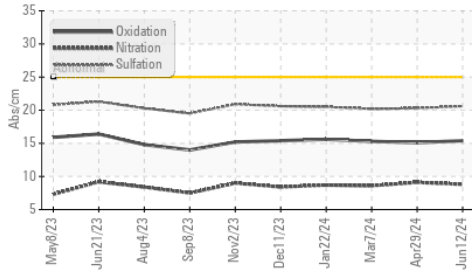


**Ferrous Alloys**

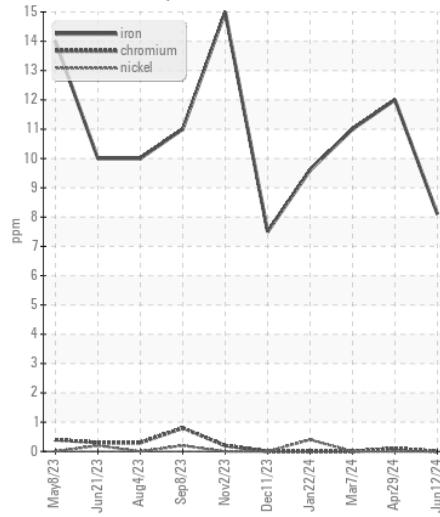


**Base Number**

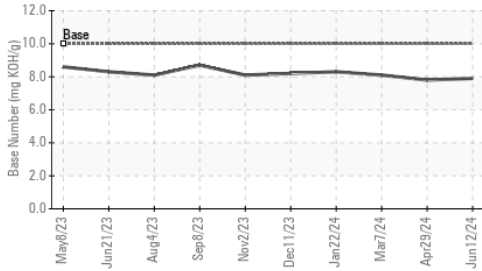


**Non-ferrous Metals**

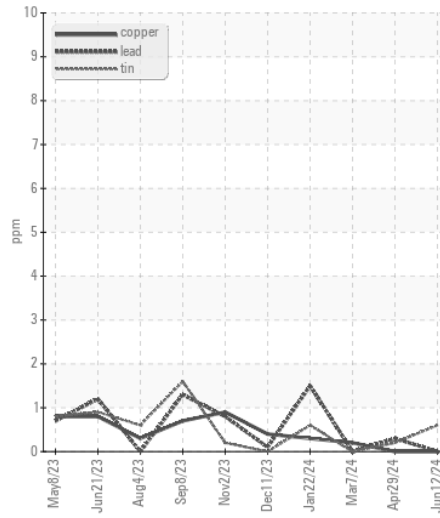


**Viscosity @ 100°C**

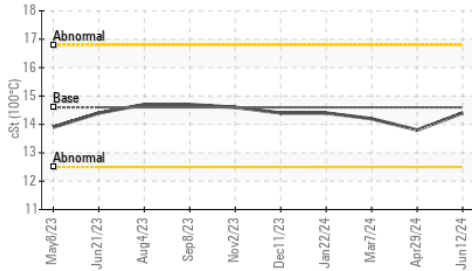

**Viscosity @ 100°C**

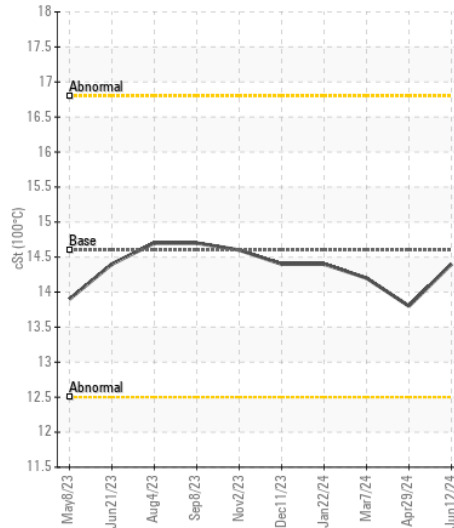

**Base Number**

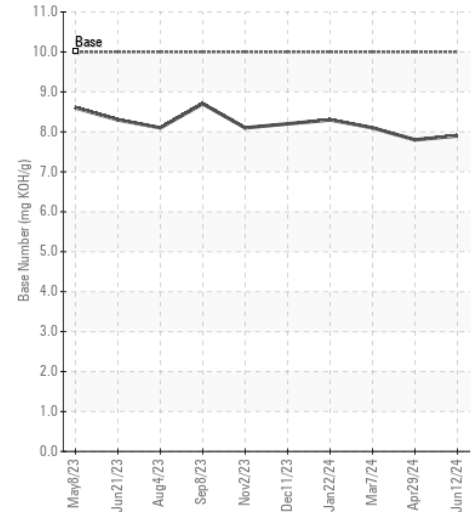

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0849498 **Received** : 19 Jun 2024  
**Lab Number** : 06214455 **Tested** : 20 Jun 2024  
**Unique Number** : 11087319 **Diagnosed** : 21 Jun 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: TBN )

**FRANKLIN IRON & METAL CORP**  
 1939 EAST 1ST ST  
 DAYTON, OH  
 US 45403  
 Contact: BILL PITTL JR  
 parts@frankliniron.com  
 T: (937)253-8184  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)