



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**PALLUBE 32**  
Machine Id  
**SULLIVAN PALATEK 23AE003683**  
Component  
**Compressor**

### RECOMMENDATION

Resample at the next service interval to monitor.

### WEAR

All component wear rates are normal.

### CONTAMINATION

There is no indication of any contamination in the oil.

### FLUID CONDITION







The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>UCS06214823</b>	UCS06167096	UCS06117266
Sample Date		Client Info		<b>14 Jun 2024</b>	26 Apr 2024	08 Mar 2024
Machine Age	hrs	Client Info		<b>12311</b>	11137	9960
Oil Age	hrs	Client Info		<b>1174</b>	3760	2591
Filter Age	hrs	Client Info		<b>1174</b>	1177	1176
Oil Changed		Client Info		<b>Not Changd</b>	Changed	Not Changd
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m		<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	1	2
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>0</b>	<1	0
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	1	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

Sodium	ppm	ASTM D5185m		<b>1</b>	<1	0
Boron	ppm	ASTM D5185m	1	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	730	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	0	<b>0</b>	<1	<1
Calcium	ppm	ASTM D5185m	0	<b>0</b>	3	3
Phosphorus	ppm	ASTM D5185m	0	<b>449</b>	414	344
Zinc	ppm	ASTM D5185m	0	<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m	590	<b>1439</b>	976	1037
Acid Number (AN)	mg KOH/g	ASTM D8045	0.14	<b>0.41</b>	0.55	0.43
Visc @ 40°C	cSt	ASTM D445	42.8	<b>41.5</b>	42.0	41.4

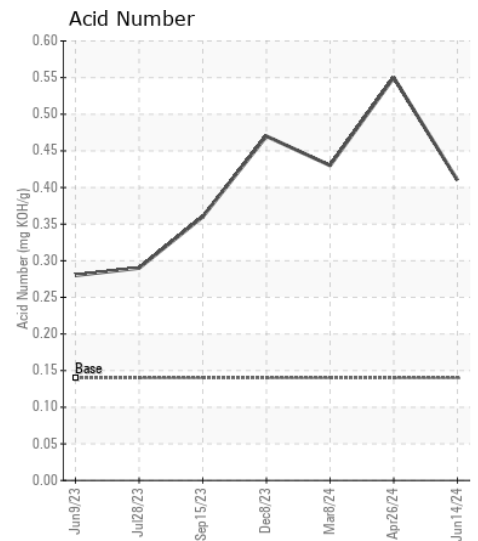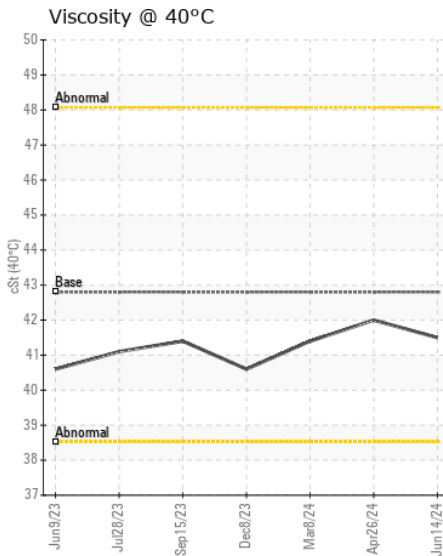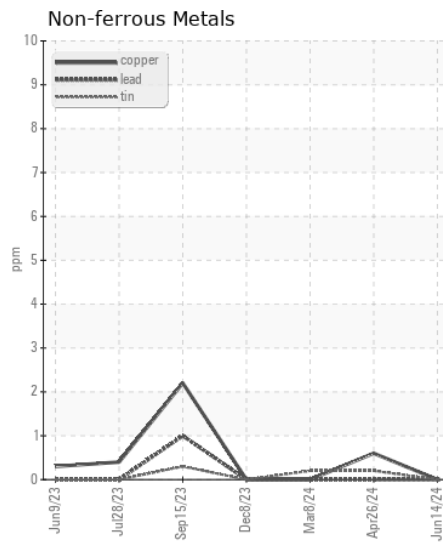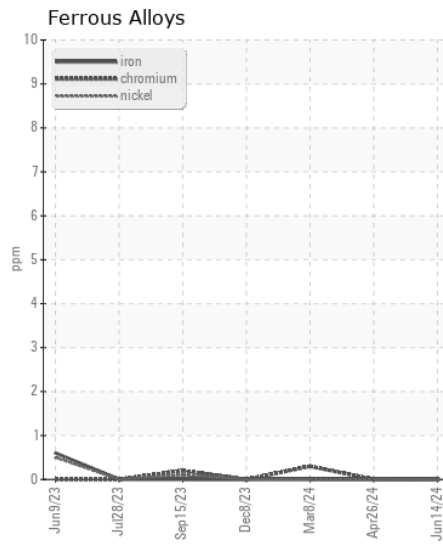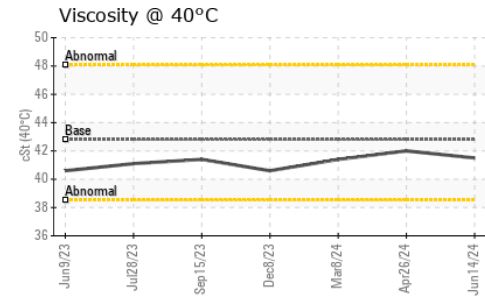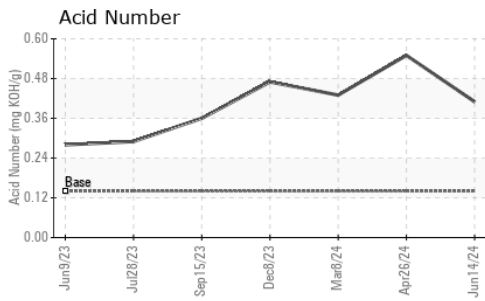

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : UCS06214823  
**Lab Number** : 06214823  
**Unique Number** : 11087687  
**Test Package** : IND 2

**Received** : 19 Jun 2024  
**Tested** : 20 Jun 2024  
**Diagnosed** : 21 Jun 2024 - Don Baldrige

**VANTAGE PUMP AND COMPRESSION**

SCHERTZ, TX  
 US 78154

Contact: JORDAN GILL  
 JGILL@VANTAGEPUMP.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: