



OIL ANALYSIS REPORT

WEAR
CONTAMINATION
FLUID CONDITION

ABNORMAL

SEVERE

NORMAL

Machine Id

RBI 3107

Component

Right Final Drive

Fluid

GEAR OIL SAE 80W90 (--- QTS)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

WEAR

Gear wear is indicated.

CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

FLUID CONDITION








The oil is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0913579	---	---
Sample Date		Client Info		14 Jun 2024	---	---
Machine Age	hrs	Client Info		8513	---	---
Oil Age	hrs	Client Info		1000	---	---
Filter Age	hrs	Client Info		1000	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				SEVERE	---	---

Iron	ppm	ASTM D5185m	>500	▲ 623	---	---
Chromium	ppm	ASTM D5185m	>10	3	---	---
Nickel	ppm	ASTM D5185m	>10	3	---	---
Titanium	ppm	ASTM D5185m		6	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	▲ 42	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>50	<1	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

Silicon	ppm	ASTM D5185m	>75	▲ 318	---	---
Potassium	ppm	ASTM D5185m	>20	8	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

Sodium	ppm	ASTM D5185m	>170	6	---	---
Boron	ppm	ASTM D5185m	400	16	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	0	---	---
Manganese	ppm	ASTM D5185m		5	---	---
Magnesium	ppm	ASTM D5185m	12	2	---	---
Calcium	ppm	ASTM D5185m	150	22	---	---
Phosphorus	ppm	ASTM D5185m	1650	432	---	---
Zinc	ppm	ASTM D5185m	125	2	---	---
Sulfur	ppm	ASTM D5185m	22500	21977	---	---
Visc @ 40°C	cSt	ASTM D445	143	203	---	---

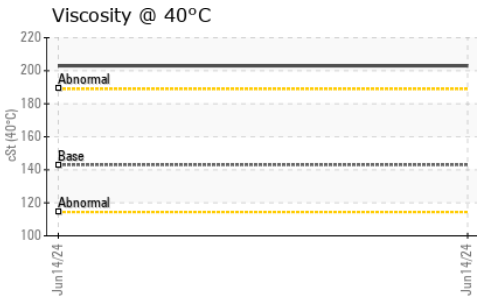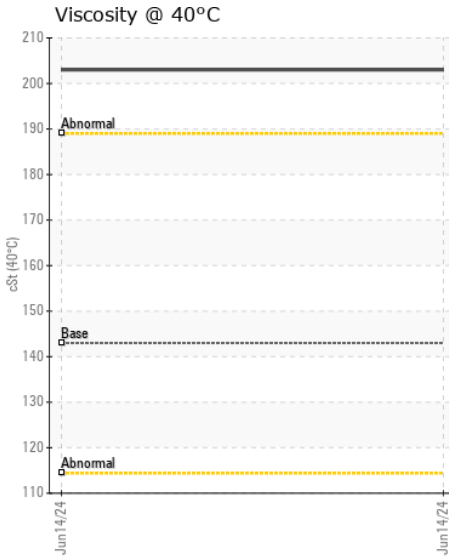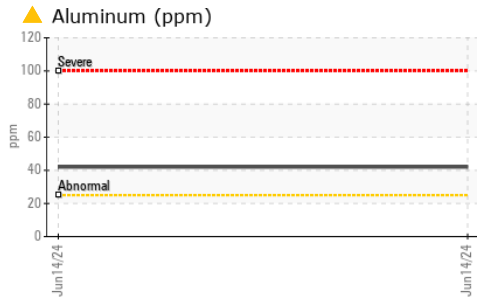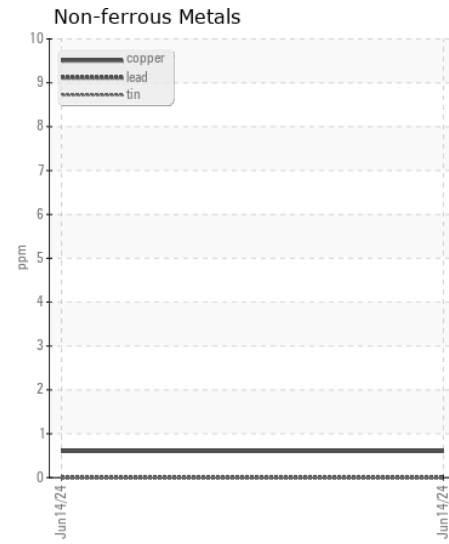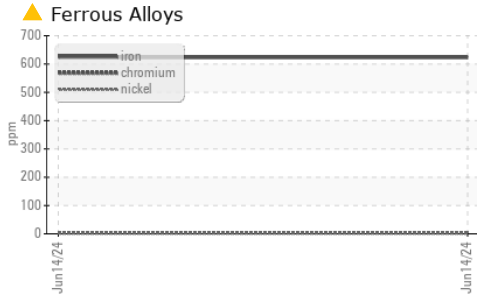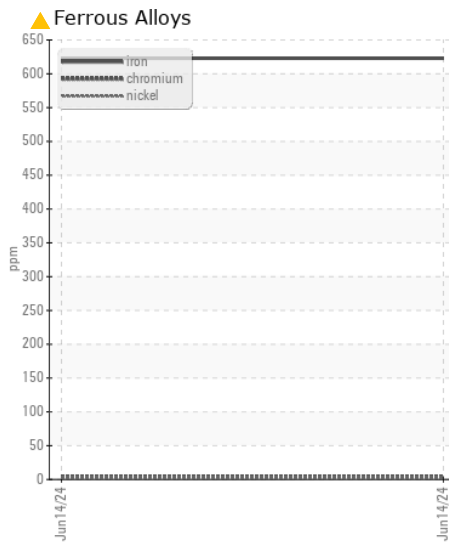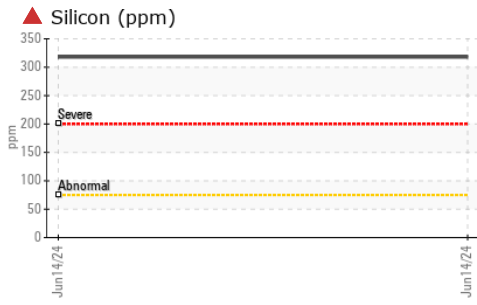

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0913579
Lab Number : 06215034
Unique Number : 11087898
Test Package : CONST

Received : 19 Jun 2024
Tested : 20 Jun 2024
Diagnosed : 21 Jun 2024 - Sean Felton

SULLIVAN EASTERN INC
 2860 C SLATER RD
 MORRISVILLE, NC
 US 27560

Contact: SCOTT SULLIVAN
 ssullivan@sullivan-eastern.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)484-8993
 F: (919)484-2136