



# VOLVO

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area  
**[717092 HALEY STONE]**  
Machine Id  
**VOLVO L35B 1873696**  
Component  
**Front Axle**  
Fluid  
**VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP453524	---	---
Sample Date		Client Info		05 Jun 2024	---	---
Machine Age	hrs	Client Info		1529	---	---
Oil Age	hrs	Client Info		1529	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				ATTENTION	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	329	---	---
Chromium	ppm	ASTM D5185m	>20	4	---	---
Nickel	ppm	ASTM D5185m	>10	1	---	---
Titanium	ppm	ASTM D5185m		2	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	<1	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>120	5	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	13	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

### FLUID CONDITION

The oil viscosity is lower than normal. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m	379	0	---	---
Barium	ppm	ASTM D5185m	0.0	4	---	---
Molybdenum	ppm	ASTM D5185m	0.8	<1	---	---
Manganese	ppm	ASTM D5185m	0.0	7	---	---
Magnesium	ppm	ASTM D5185m	31	16	---	---
Calcium	ppm	ASTM D5185m	38	91	---	---
Phosphorus	ppm	ASTM D5185m	1077	1223	---	---
Zinc	ppm	ASTM D5185m	46	198	---	---
Sulfur	ppm	ASTM D5185m	23526	21829	---	---
Visc @ 40°C	cSt	ASTM D445	139	88.8	---	---

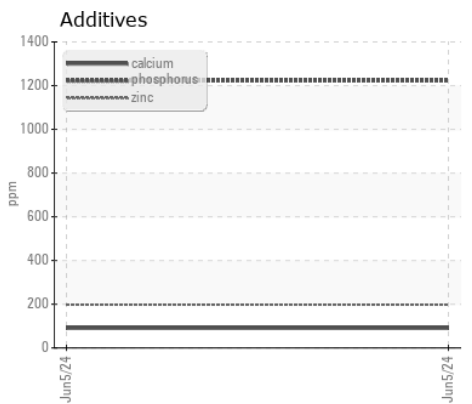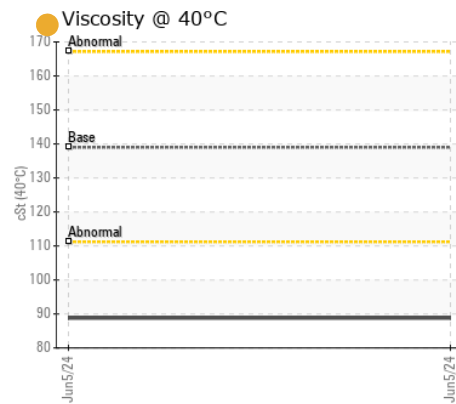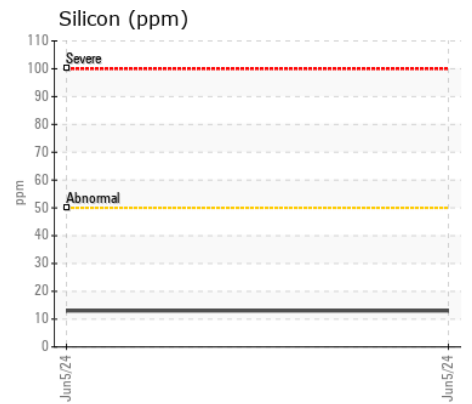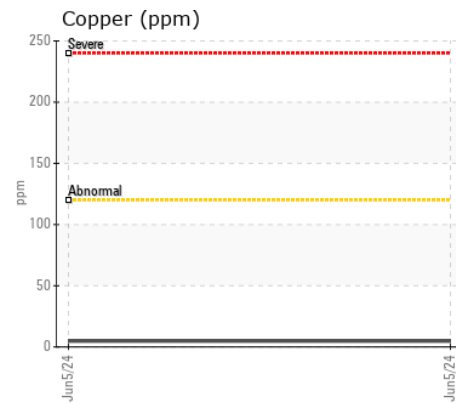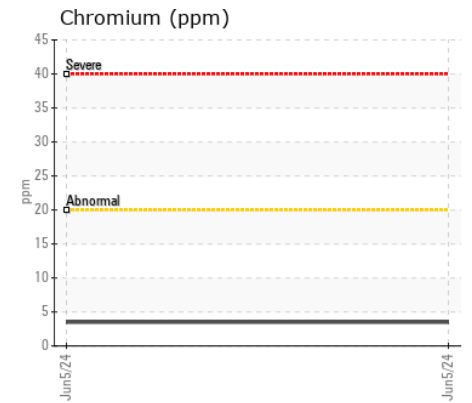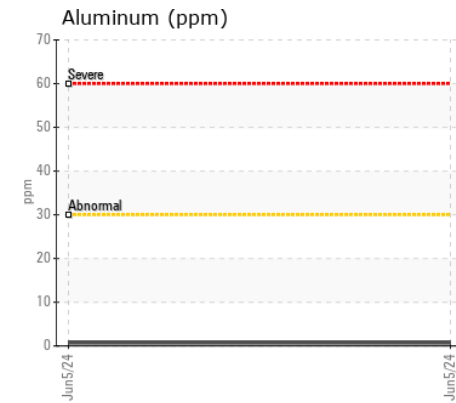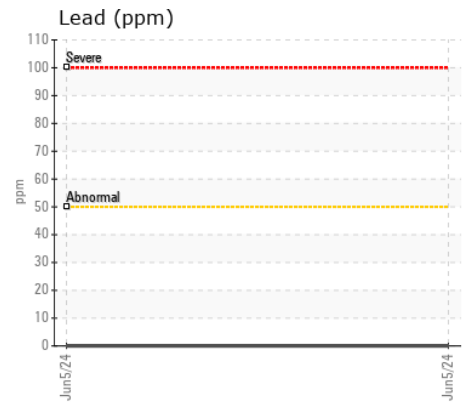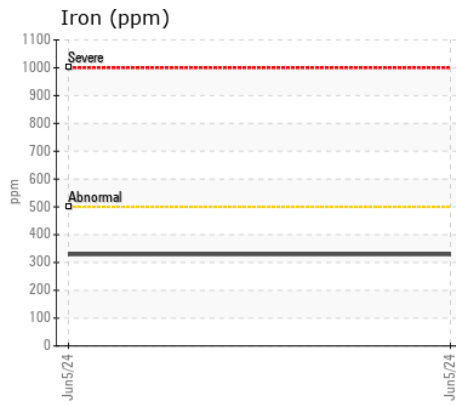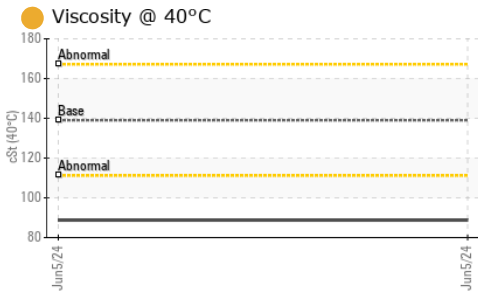

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP453524  
**Lab Number** : 06215055  
**Unique Number** : 11087919  
**Test Package** : MOB 1

**Received** : 19 Jun 2024  
**Tested** : 20 Jun 2024  
**Diagnosed** : 21 Jun 2024 - Sean Felton

**ALTA EQUIPMENT COMPANY - METRO WEST**  
 56195 PONTIAC TRAIL  
 NEW HUDSON, MI  
 US 48165  
 Contact: PAUL ELZERMAN  
 paul.elzerman@altaequipment.com  
 T: (248)356-5200  
 F: (248)356-2029

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)