



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
VOLVO EC380EL 310195
 Component
Swing Drive
 Fluid
VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP433662	VCP382949	VCP241346
Sample Date		Client Info		14 Jun 2024	04 Jan 2024	28 Mar 2019
Machine Age	hrs	Client Info		6300	5715	1690
Oil Age	hrs	Client Info		0	0	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Not Chngd	Changed
Filter Changed		Client Info		Not Chngd	Not Chngd	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1200	158	187	196
Chromium	ppm	ASTM D5185m	>10	4	5	9
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	2	<1
Lead	ppm	ASTM D5185m	>50	0	<1	<1
Copper	ppm	ASTM D5185m	>50	12	12	52
Tin	ppm	ASTM D5185m	>10	0	<1	2
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	26	31	30
Potassium	ppm	ASTM D5185m	>20	2	2	6
Water		WC Method	>0.25	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.25	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	1	<1
Boron	ppm	ASTM D5185m	379	131	133	55
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.8	0	<1	0
Manganese	ppm	ASTM D5185m	0.0	4	4	8
Magnesium	ppm	ASTM D5185m	31	0	1	0
Calcium	ppm	ASTM D5185m	38	9	11	1
Phosphorus	ppm	ASTM D5185m	1077	1515	1589	457
Zinc	ppm	ASTM D5185m	46	21	17	33
Sulfur	ppm	ASTM D5185m	23526	26258	26765	13761
Visc @ 40°C	cSt	ASTM D445	139	189	199	182.4

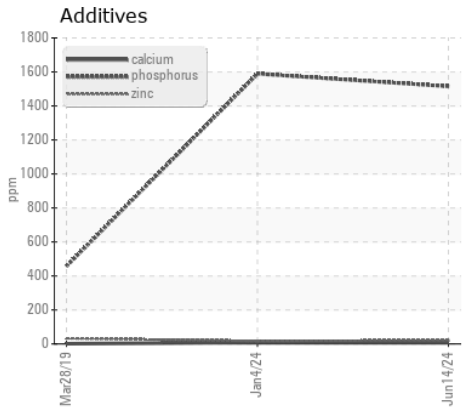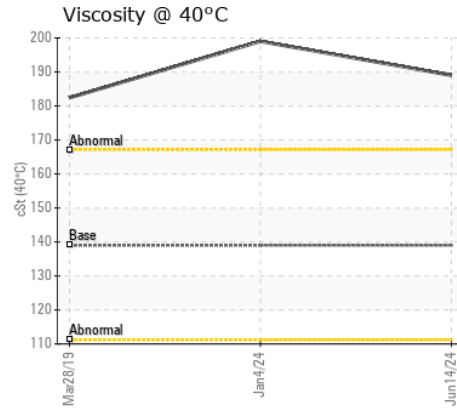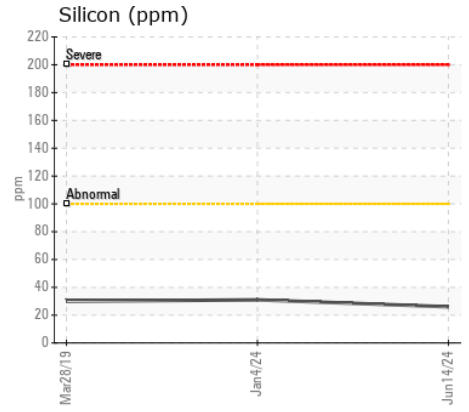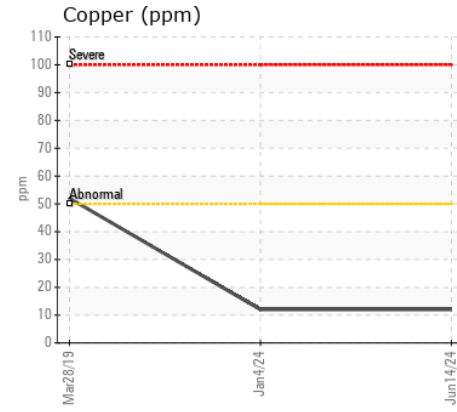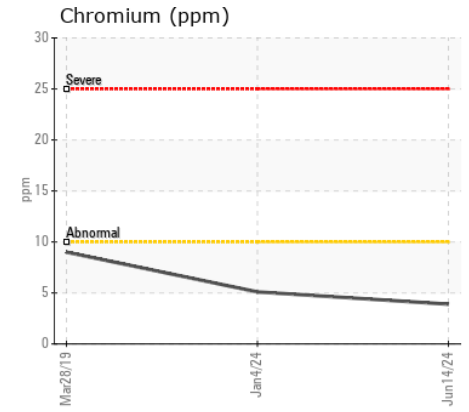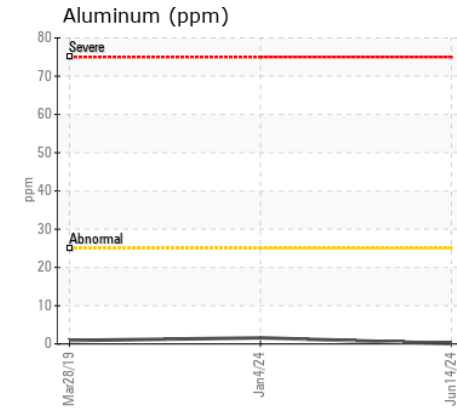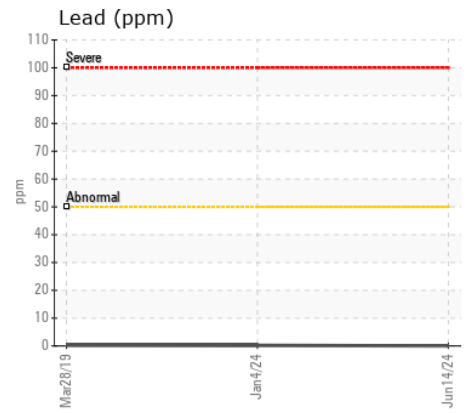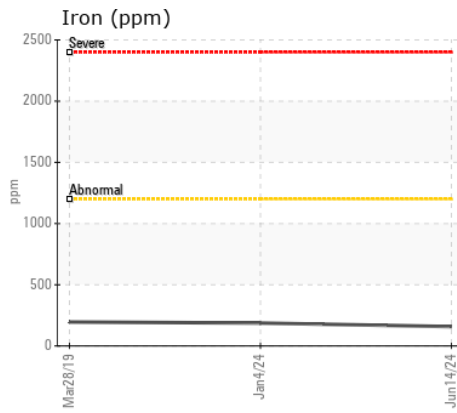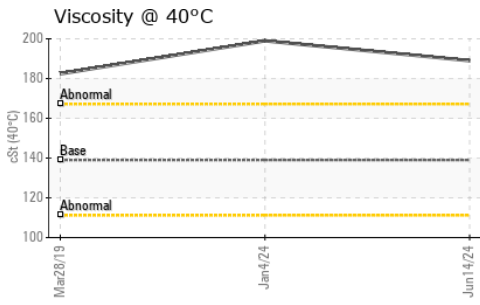

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP433662

Lab Number : 06215078

Unique Number : 11087942

Test Package : MOB 1

Received : 19 Jun 2024

Tested : 20 Jun 2024

Diagnosed : 21 Jun 2024 - Sean Felton

LEONARDS CONTRACTING

30850 STEPHENSON HWY

MADISON HEIGHTS, MI

US 48071

Contact: LARRY SCHRADER

larry.schrader@sdevelop.com

T: (810)499-1953

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)