



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[716821 MOSAIC]
Machine Id
VOLVO EC480EL 315147
Component
Rear Right Final Drive
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP447398	VCP432112	VCP417652
Sample Date		Client Info		24 May 2024	13 Jan 2024	21 Aug 2023
Machine Age	hrs	Client Info		2182	1647	812
Oil Age	hrs	Client Info		1000	800	812
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>3360	161	402	▲ 663
Chromium	ppm	ASTM D5185m	>35	2	3	9
Nickel	ppm	ASTM D5185m	>8	0	<1	0
Titanium	ppm	ASTM D5185m	>15	<1	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>185	10	1	6
Lead	ppm	ASTM D5185m	>5	0	0	0
Copper	ppm	ASTM D5185m	>80	<1	0	<1
Tin	ppm	ASTM D5185m	>8	0	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>1100	140	12	15
Potassium	ppm	ASTM D5185m	>20	1	2	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	MODER	MODER	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	<1	2
Boron	ppm	ASTM D5185m	111	123	63	<1
Barium	ppm	ASTM D5185m	0.0	0	<1	0
Molybdenum	ppm	ASTM D5185m	0.9	<1	0	<1
Manganese	ppm	ASTM D5185m	0.0	2	3	7
Magnesium	ppm	ASTM D5185m	39	9	6	0
Calcium	ppm	ASTM D5185m	93	241	69	9
Phosphorus	ppm	ASTM D5185m	920	1089	789	305
Zinc	ppm	ASTM D5185m	104	124	47	0
Sulfur	ppm	ASTM D5185m	20179	32424	23491	16313
Visc @ 40°C	cSt	ASTM D445	333	284	253	166

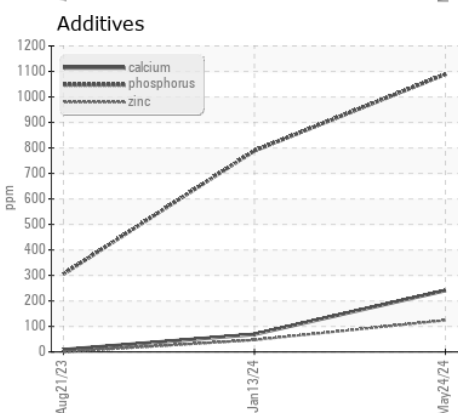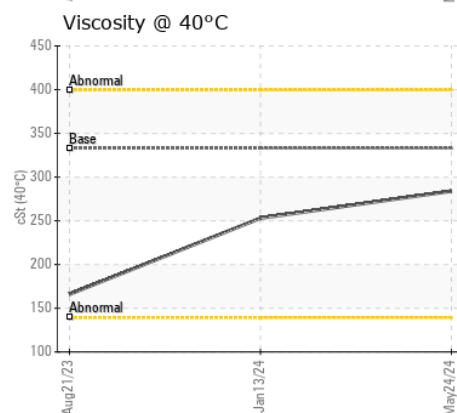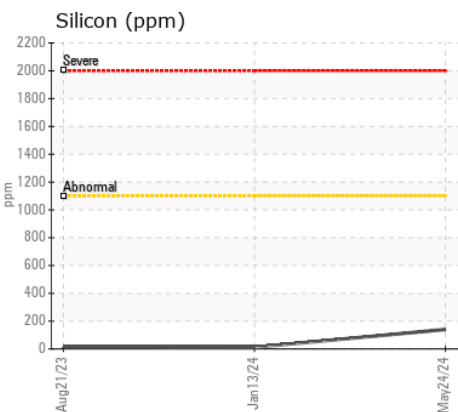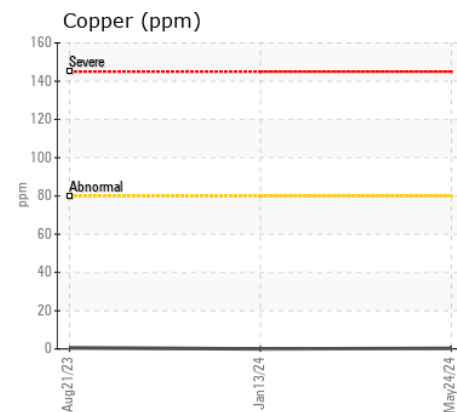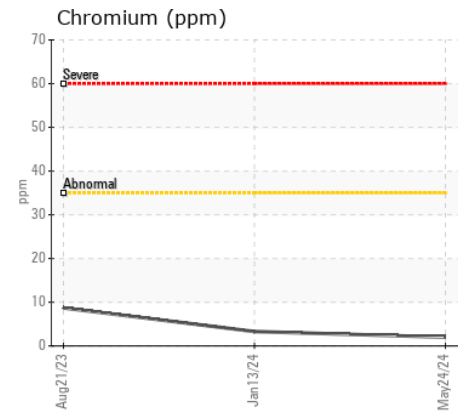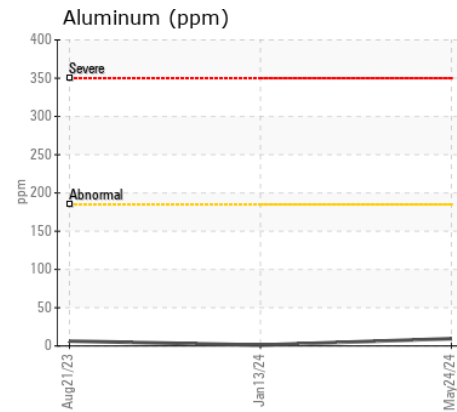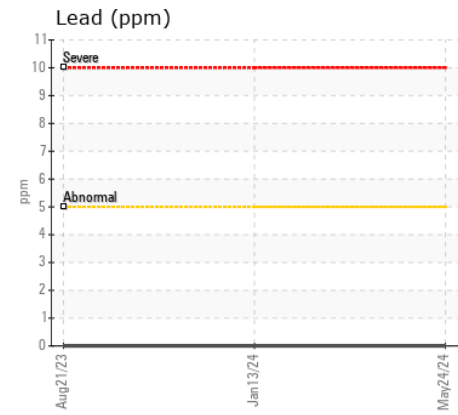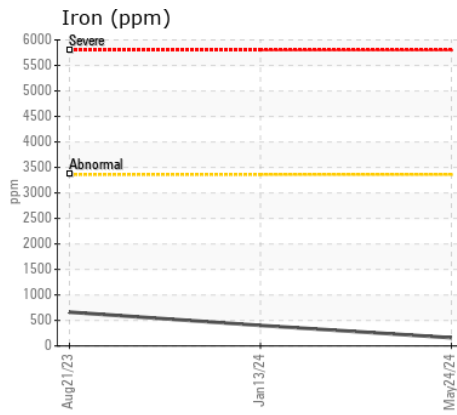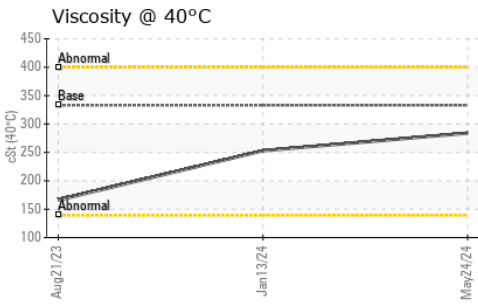

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP447398
Lab Number : 06215096
Unique Number : 11087960
Test Package : MOB 1

Received : 19 Jun 2024
Tested : 20 Jun 2024
Diagnosed : 20 Jun 2024 - Wes Davis

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619
 Contact: KENNY HANEY
 khaney@flaglerce.com
 T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)