



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L60H 623461
Component
Rear Axle
Fluid
VOLVO WB 102 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0004457	ASC0004294	ASC0006434
Sample Date		Client Info		18 Jun 2024	17 Apr 2024	23 Feb 2024
Machine Age	hrs	Client Info		1941	1510	1026
Oil Age	hrs	Client Info		0	1026	1026
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Not Changed	Not Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	49	22	110
Chromium	ppm	ASTM D5185m	>20	1	<1	4
Nickel	ppm	ASTM D5185m	>10	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	2	2
Lead	ppm	ASTM D5185m	>50	<1	<1	<1
Copper	ppm	ASTM D5185m	>120	6	<1	18
Tin	ppm	ASTM D5185m	>20	<1	<1	2
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	16	12	18
Potassium	ppm	ASTM D5185m	>20	2	2	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	0	2
Boron	ppm	ASTM D5185m		129	134	123
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		1	2	2
Manganese	ppm	ASTM D5185m		2	<1	7
Magnesium	ppm	ASTM D5185m		14	13	15
Calcium	ppm	ASTM D5185m		3246	3259	3764
Phosphorus	ppm	ASTM D5185m		1103	1077	1295
Zinc	ppm	ASTM D5185m		1340	1299	1613
Sulfur	ppm	ASTM D5185m		3586	3676	2823
Visc @ 40°C	cSt	ASTM D445	55	40.4	40.8	42.4

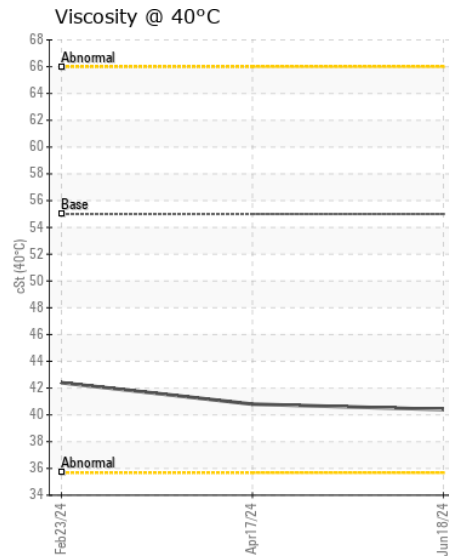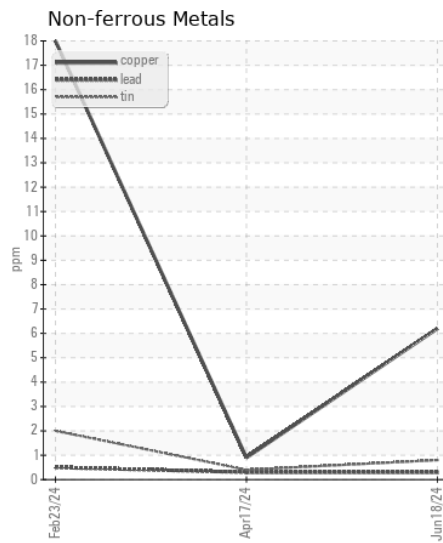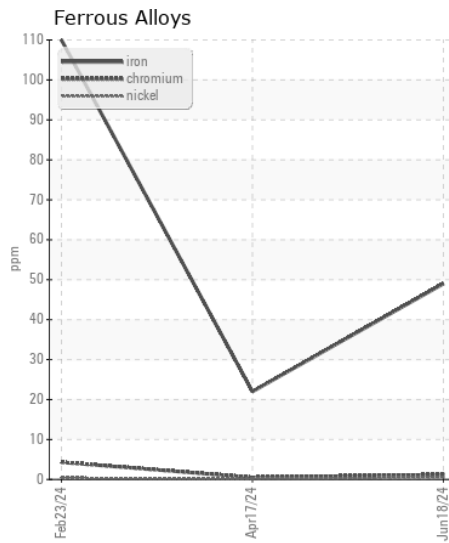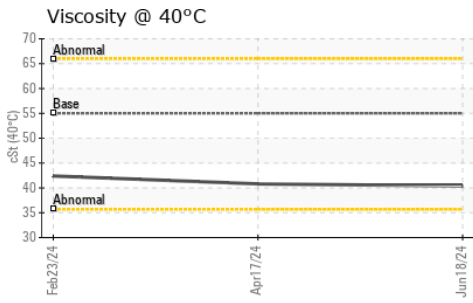

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0004457
Lab Number : 06215203
Unique Number : 11088067
Test Package : CONST

Received : 19 Jun 2024
Tested : 20 Jun 2024
Diagnosed : 20 Jun 2024 - Wes Davis

520 - ASCENDUM MACHINERY INC - KNOXVILLE
 5730 RUTLEDGE PIKE
 KNOXVILLE, TN
 US 37924

Contact: BRANDON GRANT
 brandon.grant@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (865)525-1845
 F: (865)525-0251