



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL

Machine Id
1XPCDP9X7LD702581
 Component
Diesel Engine
 Fluid
{not provided} (--- LTR)

RECOMMENDATION

The oil is near the end of it's useful service life, recommend schedule an oil change. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.








CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The BN level is low.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL06215252	---	---
Sample Date		Client Info		15 Jun 2024	---	---
Machine Age	mls	Client Info		56250	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---
Iron	ppm	ASTM D5185m	>100	69	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	8	---	---
Lead	ppm	ASTM D5185m	>40	1	---	---
Copper	ppm	ASTM D5185m	>330	4	---	---
Tin	ppm	ASTM D5185m	>15	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>25	11	---	---
Potassium	ppm	ASTM D5185m	>20	11	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	1.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	15.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	32.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m		22	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		125	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		711	---	---
Calcium	ppm	ASTM D5185m		1832	---	---
Phosphorus	ppm	ASTM D5185m		761	---	---
Zinc	ppm	ASTM D5185m		949	---	---
Sulfur	ppm	ASTM D5185m		2817	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	35.9	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		▲ 2.5	---	---
Visc @ 100°C	cSt	ASTM D445		15.2	---	---

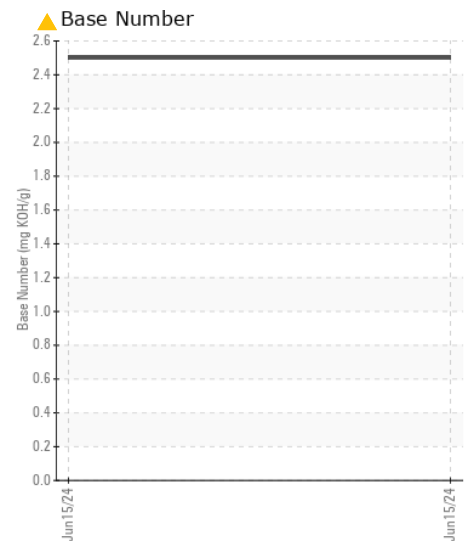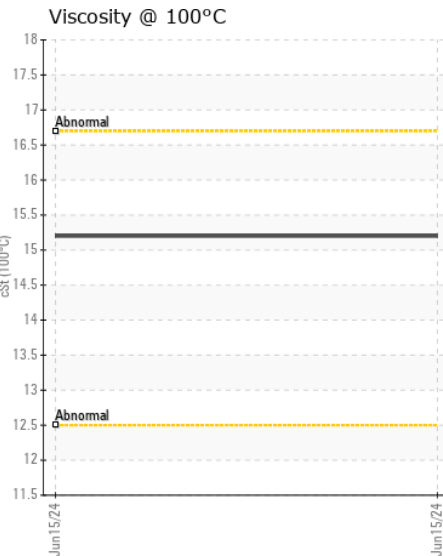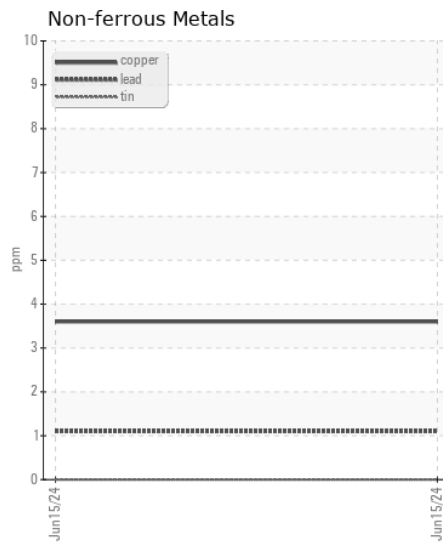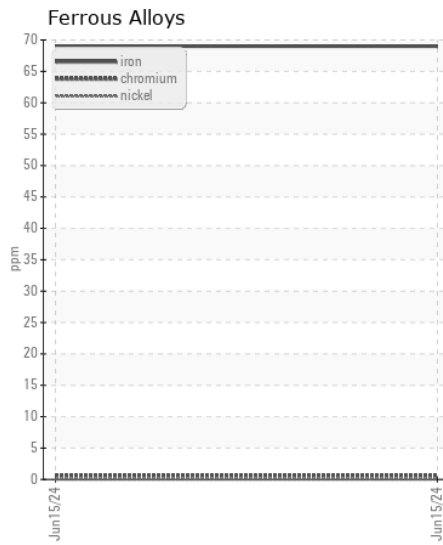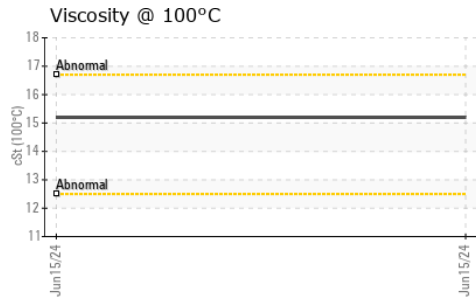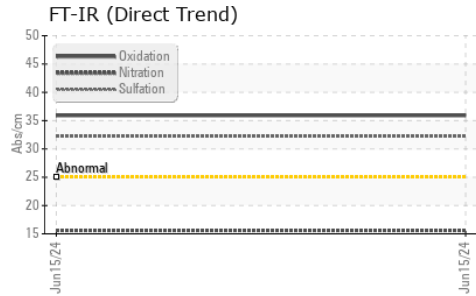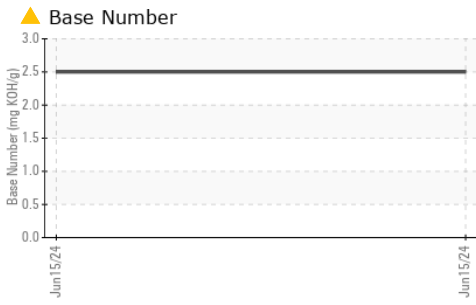

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL06215252
Lab Number : 06215252
Unique Number : 11088116
Test Package : FLEET

Received : 20 Jun 2024
Tested : 21 Jun 2024
Diagnosed : 21 Jun 2024 - Sean Felton

RTL PACLEASE - 7050 -Leasing Tyler
 10791 Hwy 69 North
 Tyler, TX
 US 75706

Contact: Justin Cooper
 CooperJ1@RushEnterprises.Com

T: (903)405-3000

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: