



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[16W16473]

Machine Id

JOHN DEERE 350P 1FF350PAHPF000476

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (7 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: 16W16473)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0217213	JR0206832	JR0185424
Sample Date		Client Info		18 Jun 2024	28 Mar 2024	23 Oct 2023
Machine Age	hrs	Client Info		1986	1492	959
Oil Age	hrs	Client Info		494	533	427
Filter Age	hrs	Client Info		494	533	427
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	24	28	26
Chromium	ppm	ASTM D5185m	>11	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	2	4	8
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>31	4	4	6
Lead	ppm	ASTM D5185m	>26	2	1	<1
Copper	ppm	ASTM D5185m	>26	5	9	31
Tin	ppm	ASTM D5185m	>4	1	<1	1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	9	8	8
Potassium	ppm	ASTM D5185m	>20	3	<1	4
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	8.7	8.8	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.8	22.9	22.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	0	3	2
Boron	ppm	ASTM D5185m		211	188	221
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		261	251	254
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		849	854	806
Calcium	ppm	ASTM D5185m		1460	1499	1347
Phosphorus	ppm	ASTM D5185m		947	823	915
Zinc	ppm	ASTM D5185m		1094	1035	1054
Sulfur	ppm	ASTM D5185m		3085	3346	3106
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.4	17.9	17.6
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.2	8.3	8.5
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.6	13.2

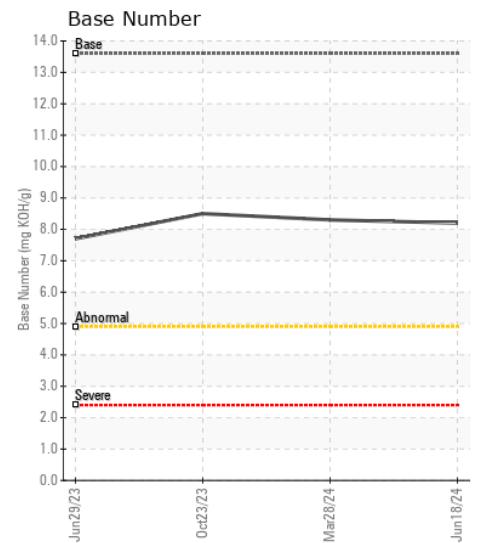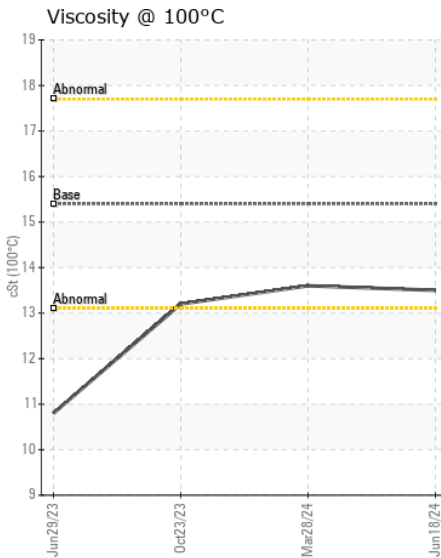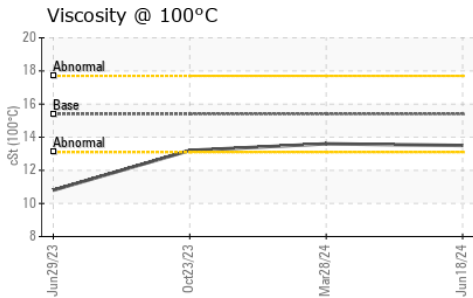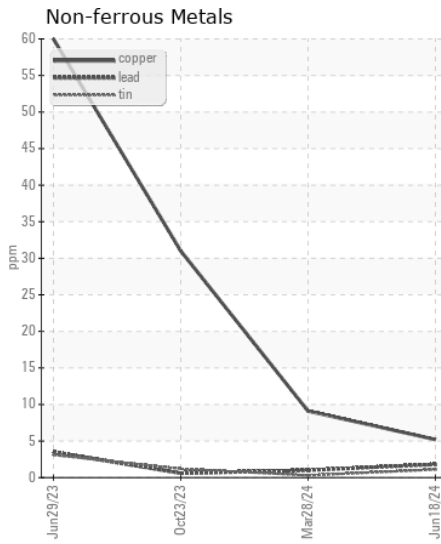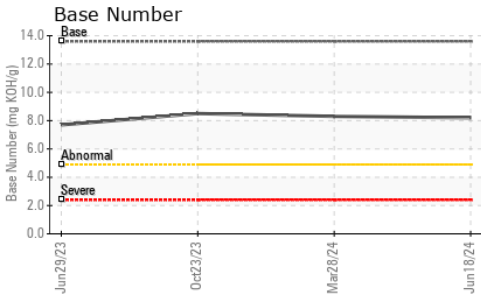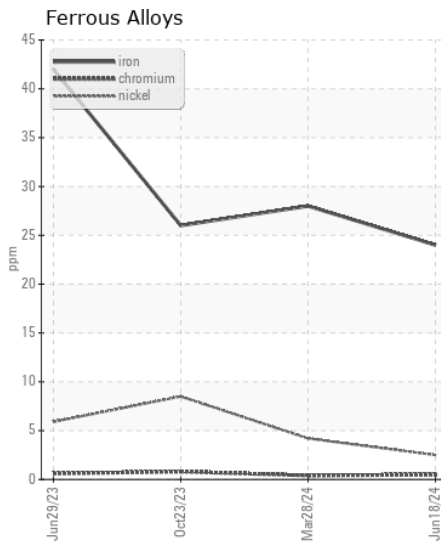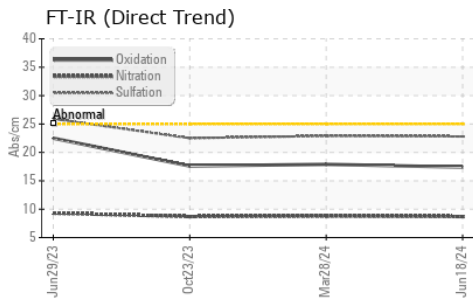

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0217213 **Received** : 20 Jun 2024
Lab Number : 06215458 **Tested** : 21 Jun 2024
Unique Number : 11088322 **Diagnosed** : 21 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - CASTLE HAYNE
 113 CROWATAN ROAD
 CASTLE HAYNE, NC
 US 28429-5819

Contact: WILMINGTON SHOP

todd.simmons@jamesriverequipment.com; canastasio@wearcheck.com; canastasio@we

T: (910)675-9211

F: