



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 544L 1DW544LZELF707582**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0213654</b>	JR0213228	JR0204870
Sample Date		Client Info		<b>19 Jun 2024</b>	14 May 2024	17 Mar 2024
Machine Age	hrs	Client Info		<b>4237</b>	4028	3507
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>6</b>	7	4
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>4</b>	3	4
Lead	ppm	ASTM D5185m	>26	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>26	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	<b>8</b>	6	7
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	<1	<1
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.1</b>	8.4	7.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.4</b>	21.0	20.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>&lt;1</b>	2	2
Boron	ppm	ASTM D5185m		<b>310</b>	250	257
Barium	ppm	ASTM D5185m		<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>250</b>	236	226
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>796</b>	831	739
Calcium	ppm	ASTM D5185m		<b>1398</b>	1506	1316
Phosphorus	ppm	ASTM D5185m		<b>931</b>	939	832
Zinc	ppm	ASTM D5185m		<b>1070</b>	1116	1001
Sulfur	ppm	ASTM D5185m		<b>3176</b>	3576	3003
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.9</b>	15.9	14.8
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>9.0</b>	8.3	9.3
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.2</b>	12.5	13.0


**FT-IR (Direct Trend)**

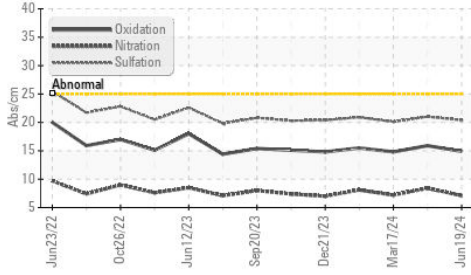


**Base Number**

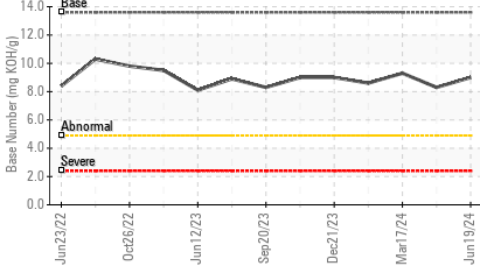


**Viscosity @ 100°C**

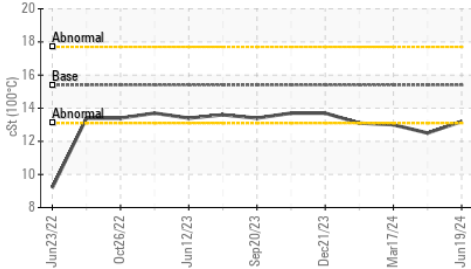


**Ferrous Alloys**

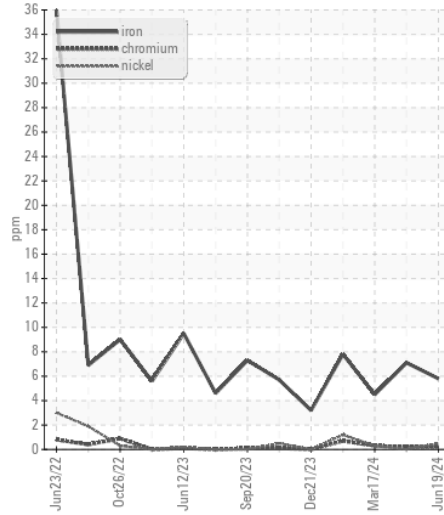


**Non-ferrous Metals**

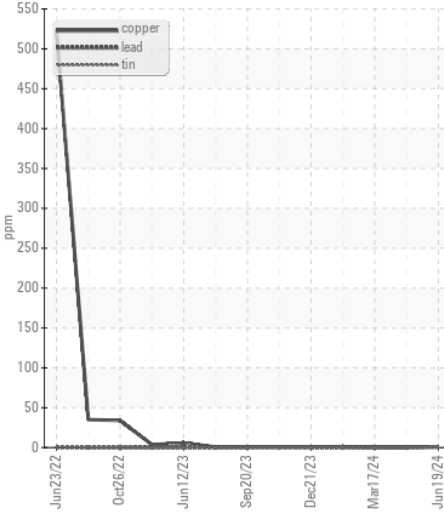

**Viscosity @ 100°C**

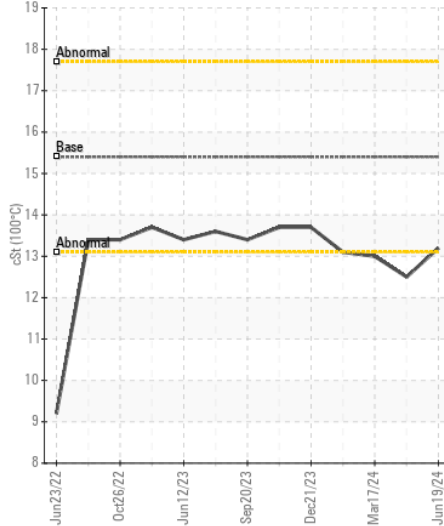

**Base Number**

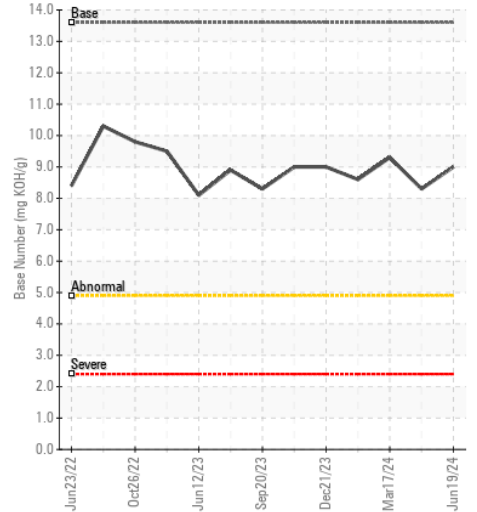

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0213654 **Received** : 20 Jun 2024  
**Lab Number** : 06215480 **Tested** : 21 Jun 2024  
**Unique Number** : 11088344 **Diagnosed** : 21 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**JRE - GREENSBORO**  
 411 SOUTH REGIONAL ROAD  
 GREENSBORO, NC  
 US 27409  
 Contact: NICK GALLAHER  
 NGALLAHER@JRENET.COM  
 T: (336)668-2762  
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)