



Area
[W9027]
Machine Id
JOHN DEERE 644 P 1DW644PALPLX20815
Component
Diesel Engine
Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (30 QTS)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: W9027)

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | JR0196818 | --- | --- |
| Sample Date | | Client Info | | 17 Jun 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 764 | --- | --- |
| Oil Age | hrs | Client Info | | 764 | --- | --- |
| Filter Age | hrs | Client Info | | 764 | --- | --- |
| Oil Changed | | Client Info | | Changed | --- | --- |
| Filter Changed | | Client Info | | Changed | --- | --- |
| Sample Status | | | | ABNORMAL | --- | --- |

WEAR

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

| | | | | | | |
|--------------|--------|-------------|------|--------------|-----|-----|
| Iron | ppm | ASTM D5185m | >51 | 34 | --- | --- |
| Chromium | ppm | ASTM D5185m | >11 | 1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >5 | 5 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | >3 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >31 | 4 | --- | --- |
| Lead | ppm | ASTM D5185m | >26 | 1 | --- | --- |
| Copper | ppm | ASTM D5185m | >26 | ▲ 316 | --- | --- |
| Tin | ppm | ASTM D5185m | >4 | 4 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION














Fuel content negligible. There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|--------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >22 | 12 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 4 | --- | --- |
| Fuel | % | ASTM D3524 | >2.1 | 0.3 | --- | --- |
| Water | | WC Method | >0.21 | NEG | --- | --- |
| Glycol | | WC Method | | NEG | --- | --- |
| Soot % | % | *ASTM D7844 | >3 | 0.4 | --- | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 9.0 | --- | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 22.7 | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.21 | NEG | --- | --- |

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

| | | | | | | |
|------------------|----------|-------------|------|---------------|-----|-----|
| Sodium | ppm | ASTM D5185m | >31 | 4 | --- | --- |
| Boron | ppm | ASTM D5185m | | 197 | --- | --- |
| Barium | ppm | ASTM D5185m | | 3 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 254 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 6 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | 864 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 1439 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 1001 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 1149 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 3151 | --- | --- |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 16.8 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 13.6 | 8.3 | --- | --- |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | ● 10.4 | --- | --- |

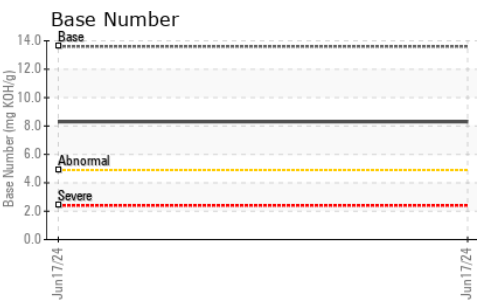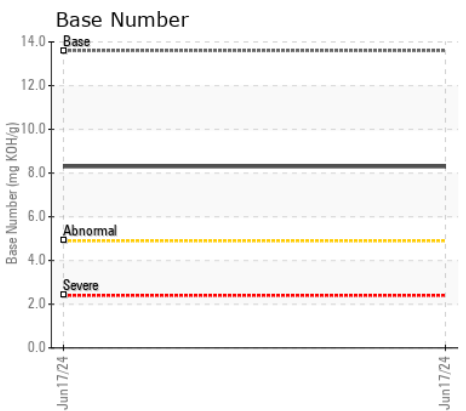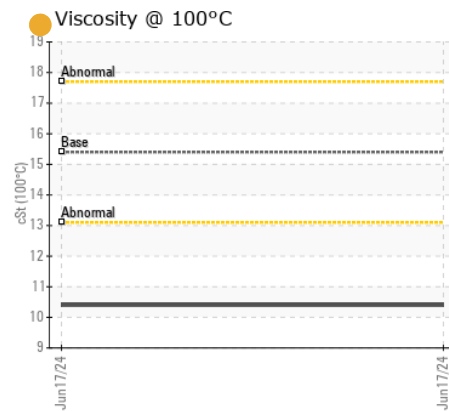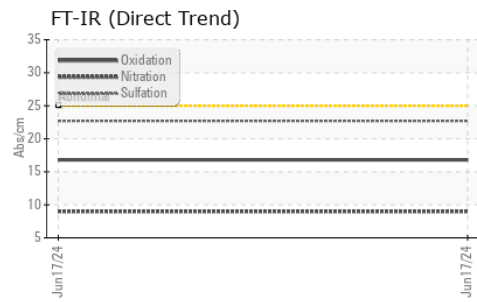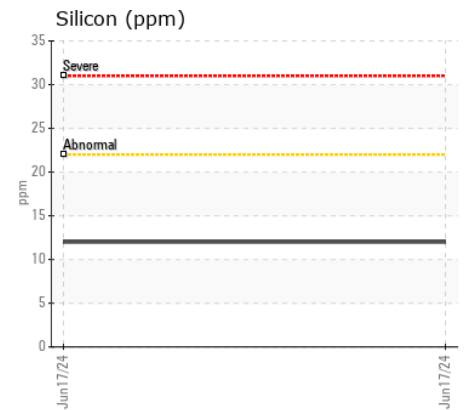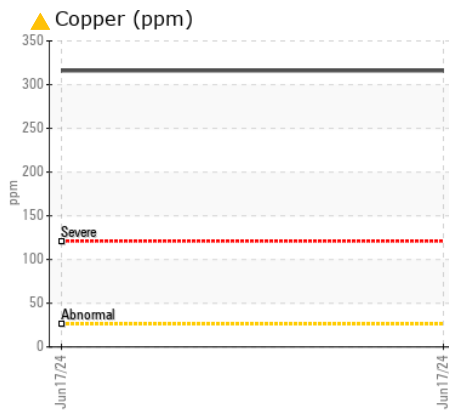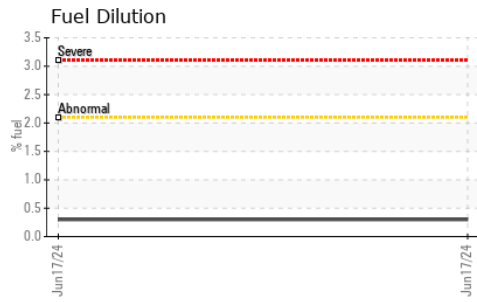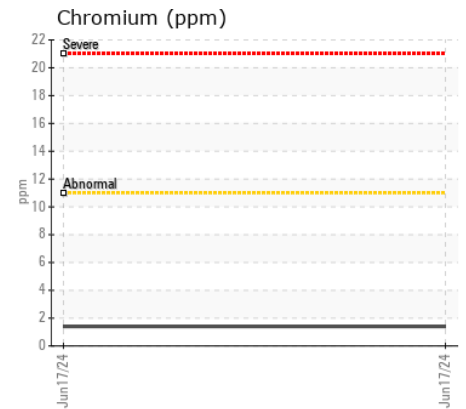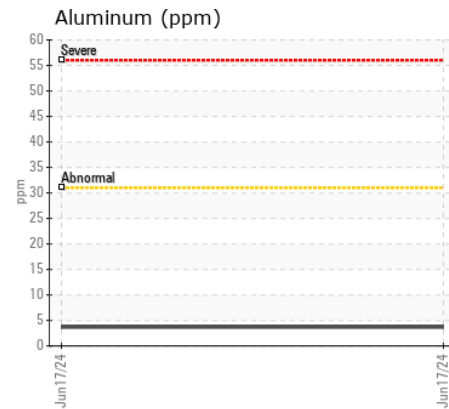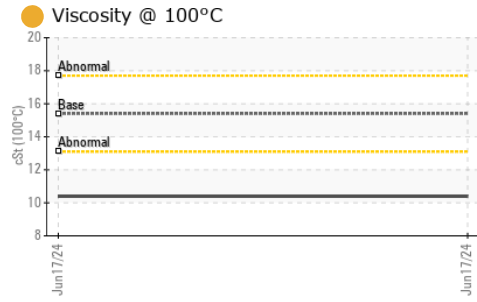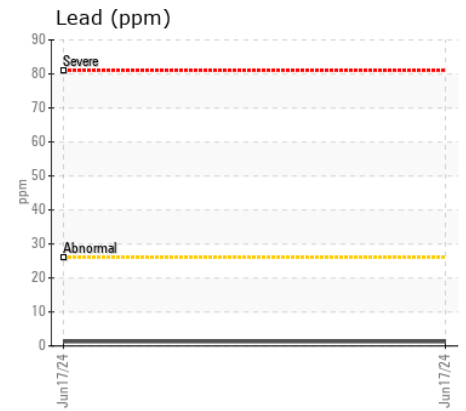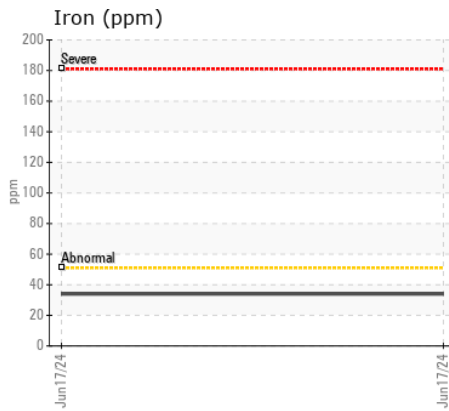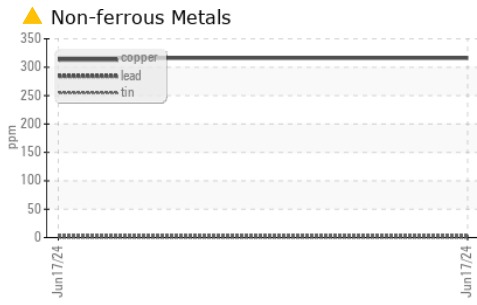

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0196818 **Received** : 20 Jun 2024
Lab Number : 06215481 **Tested** : 24 Jun 2024
Unique Number : 11088345 **Diagnosed** : 24 Jun 2024 - Jonathan Hester
Test Package : MOBCE (Additional Tests: FuelDilution, PercentFuel, TBN)

CARLTON'S BACKHOE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: LEO

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)547-0211
 F: