



PacLease

OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
8573858
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 XLE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | RPL0014217 | RPL0017173 | RPL06014710 |
| Sample Date | | Client Info | | 11 Jun 2024 | 15 Feb 2024 | 21 Nov 2023 |
| Machine Age | mls | Client Info | | 198686 | 177772 | 0 |
| Oil Age | mls | Client Info | | 0 | 0 | 0 |
| Filter Age | mls | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Changed | Changed | N/A |
| Filter Changed | | Client Info | | Changed | Changed | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >100 | 62 | 72 | 72 |
| Chromium | ppm | ASTM D5185m | >20 | 2 | 2 | 2 |
| Nickel | ppm | ASTM D5185m | >4 | <1 | <1 | 0 |
| Titanium | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 22 | 12 | 19 |
| Lead | ppm | ASTM D5185m | >40 | <1 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >330 | 2 | 3 | 2 |
| Tin | ppm | ASTM D5185m | >15 | <1 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION








There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >25 | 11 | 12 | 13 |
| Potassium | ppm | ASTM D5185m | >20 | 49 | 24 | 35 |
| Fuel | | WC Method | >5 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >3 | 0.9 | 0.7 | 1.3 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 15.9 | 12.9 | 15.5 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 29.0 | 27.6 | 33.2 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|-------------|------|------|
| Sodium | ppm | ASTM D5185m | | 1 | 4 | 5 |
| Boron | ppm | ASTM D5185m | | 22 | 44 | 38 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 46 | 24 | 130 |
| Manganese | ppm | ASTM D5185m | | 1 | <1 | 1 |
| Magnesium | ppm | ASTM D5185m | | 611 | 1107 | 612 |
| Calcium | ppm | ASTM D5185m | 2900 | 1921 | 1970 | 1615 |
| Phosphorus | ppm | ASTM D5185m | 1100 | 877 | 1103 | 823 |
| Zinc | ppm | ASTM D5185m | 1200 | 1056 | 1310 | 1123 |
| Sulfur | ppm | ASTM D5185m | 4000 | 2666 | 4751 | 2677 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 32.8 | 26.3 | 34.2 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 10.3 | 5.3 | 4.7 | 5.2 |
| Visc @ 100°C | cSt | ASTM D445 | 11.9 | 12.2 | 10.5 | 14.7 |

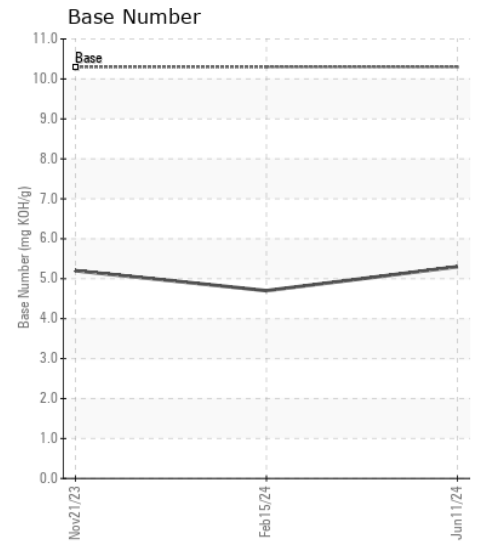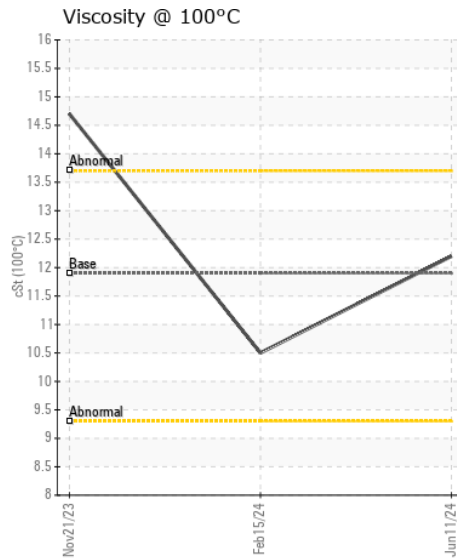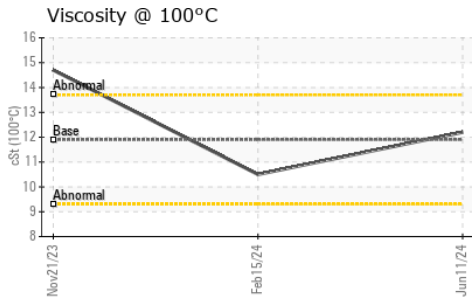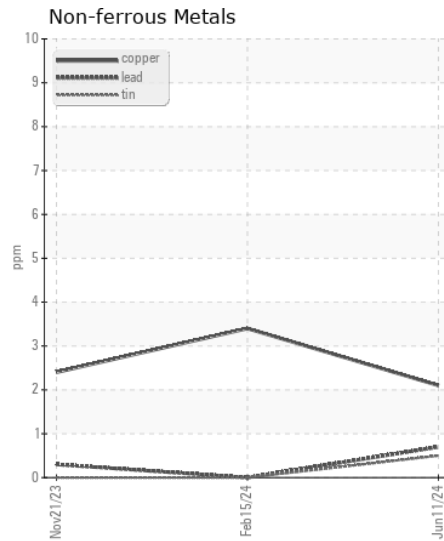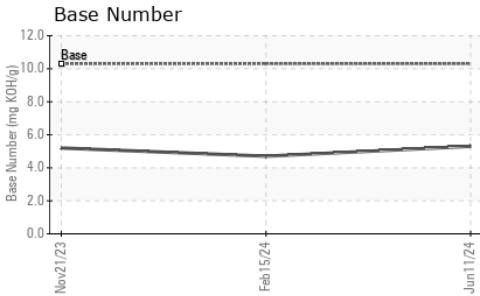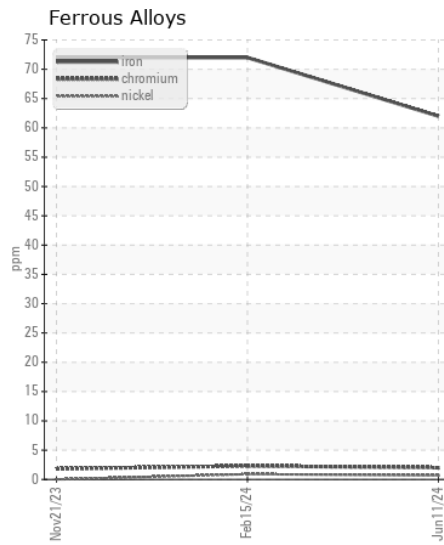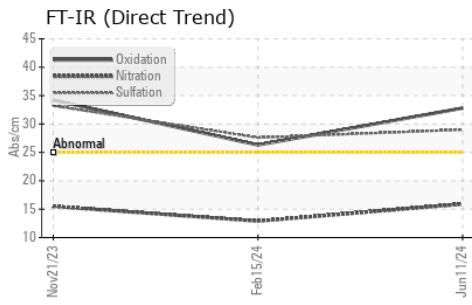

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0014217
Lab Number : 06215508
Unique Number : 11088372
Test Package : FLEET

Received : 20 Jun 2024
Tested : 21 Jun 2024
Diagnosed : 21 Jun 2024 - Don Baldrige

RTL PACLEASE - 7001 - Houston
 6300 N. Loop East
 Houston, TX
 US 77026

Contact: RODNEY BRIGGS
 briggs@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: