



WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Machine Id  
**JOHN DEERE 310 P 1DW310PAPRFB08131**

Component  
**Hydraulic System**

Fluid  
**JOHN DEERE HYDRAU (--- GAL)**

### RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0218229	---	---
Sample Date		Client Info		17 Jun 2024	---	---
Machine Age	hrs	Client Info		505	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				ATTENTION	---	---

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
		ASTM D8184		18	---	---
Iron	ppm	ASTM D5185m	>20	0	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	<1	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>75	0	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION











There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	1	---	---
Potassium	ppm	ASTM D5185m	>20	5	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	6129	---	---
Particles >6µm		ASTM D7647	>1300	2024	---	---
Particles >14µm		ASTM D7647	>160	85	---	---
Particles >21µm		ASTM D7647	>40	14	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	20/18/14	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		2	---	---
Calcium	ppm	ASTM D5185m	87	92	---	---
Phosphorus	ppm	ASTM D5185m	727	707	---	---
Zinc	ppm	ASTM D5185m	900	926	---	---
Sulfur	ppm	ASTM D5185m	1500	2051	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.76	---	---
Visc @ 40°C	cSt	ASTM D445	65	60.9	---	---

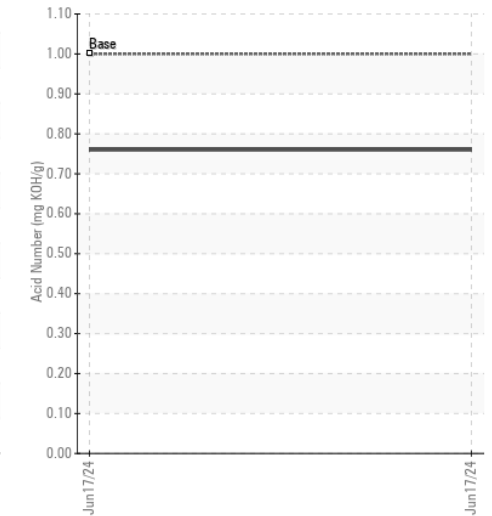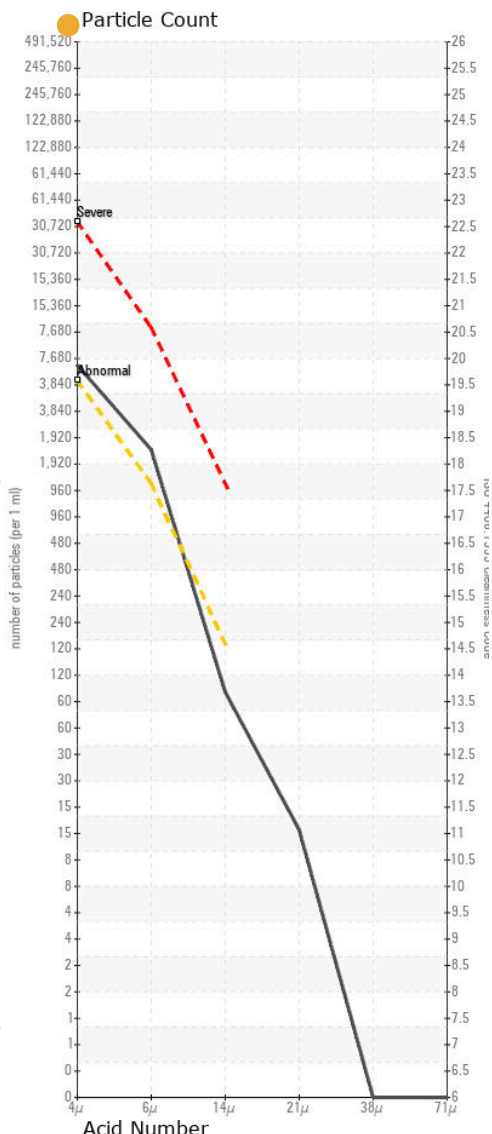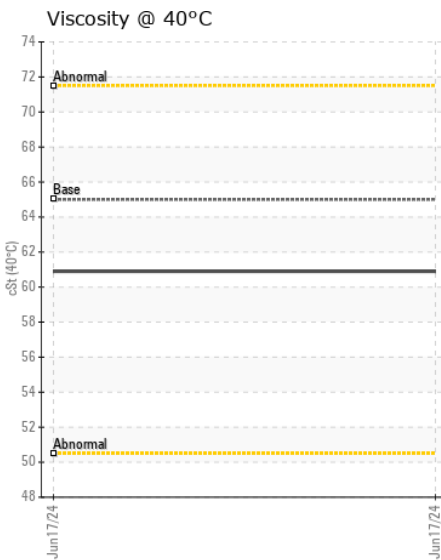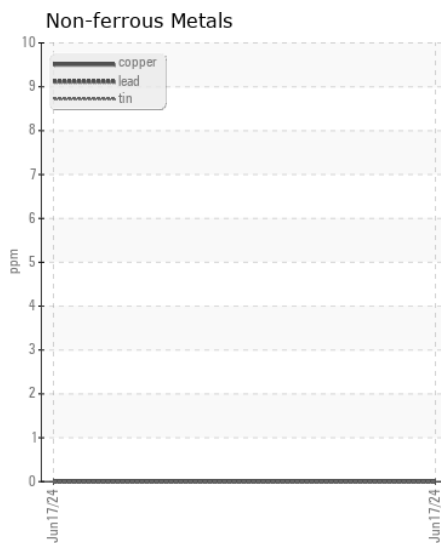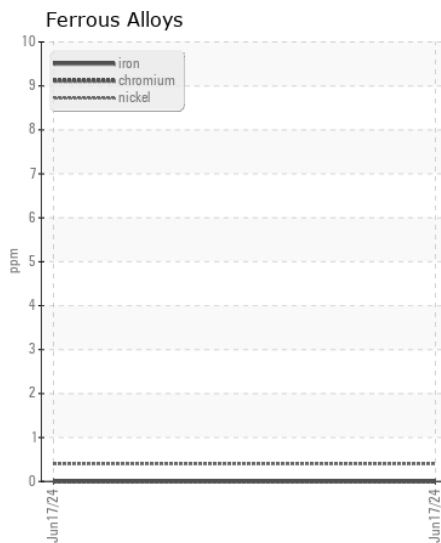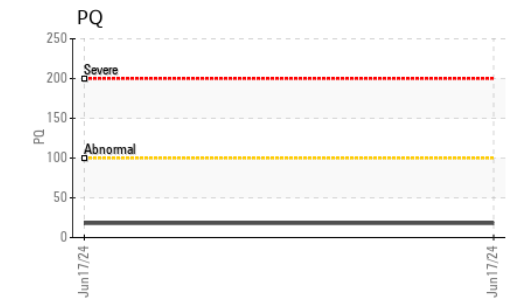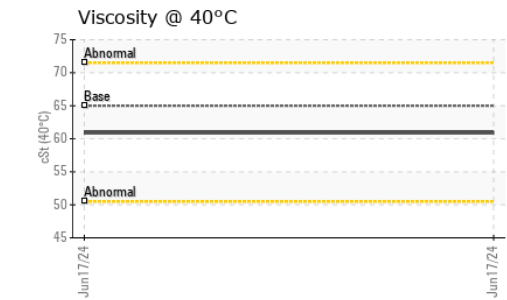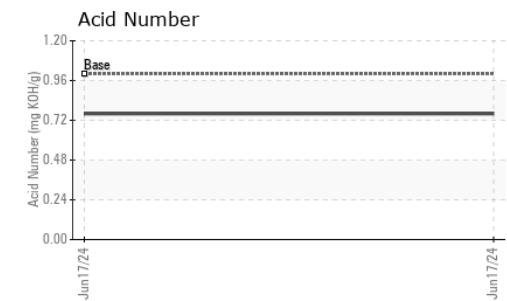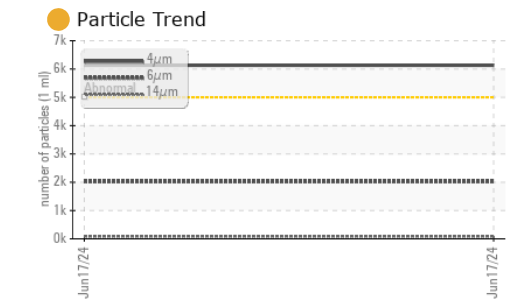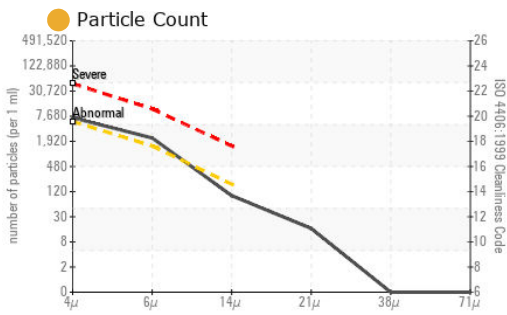

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0218229 **Received** : 20 Jun 2024  
**Lab Number** : 06215723 **Tested** : 21 Jun 2024  
**Unique Number** : 11088587 **Diagnosed** : 21 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**B & S SITE DEVELOPMENT**  
 7800 PINEY BRANCH LANE  
 BRISTOW, VA  
 US 20136  
 Contact: DANNY HUFF  
 dhuff@bandssite.com  
 T: (540)270-3203  
 F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)