



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area
RIG 274
 Machine Id
R274-MP-03
 Component
Gearbox
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.










CONTAMINATION

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KL0014481	KL0014284	KL0014294
Sample Date		Client Info		11 Jun 2024	06 May 2024	02 Apr 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
Iron	ppm	ASTM D5185m	>200	22	9	15
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>25	5	3	0
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>200	4	4	3
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>50	19	17	8
Potassium	ppm	ASTM D5185m	>20	5	1	0
Water		WC Method	>0.2	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>20000	▲ 87152	▲ 129409	▲ 149313
Particles >6µm		ASTM D7647	>5000	▲ 22135	▲ 30242	▲ 38955
Particles >14µm		ASTM D7647	>640	148	158	625
Particles >21µm		ASTM D7647	>160	20	15	112
Particles >38µm		ASTM D7647	>40	1	0	2
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	▲ 24/22/14	▲ 24/22/14	▲ 24/22/16
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m		9	2	6
Boron	ppm	ASTM D5185m		3	0	0
Barium	ppm	ASTM D5185m		0	<1	<1
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		4	1	<1
Calcium	ppm	ASTM D5185m		21	26	10
Phosphorus	ppm	ASTM D5185m		123	135	123
Zinc	ppm	ASTM D5185m		24	16	0
Sulfur	ppm	ASTM D5185m		10770	9682	9379
Acid Number (AN)	mg KOH/g	ASTM D8045		0.43	0.35	0.36
Visc @ 40°C	cSt	ASTM D445		313	323	325

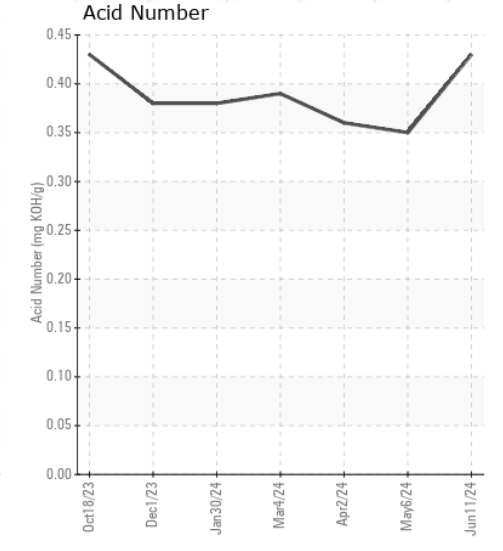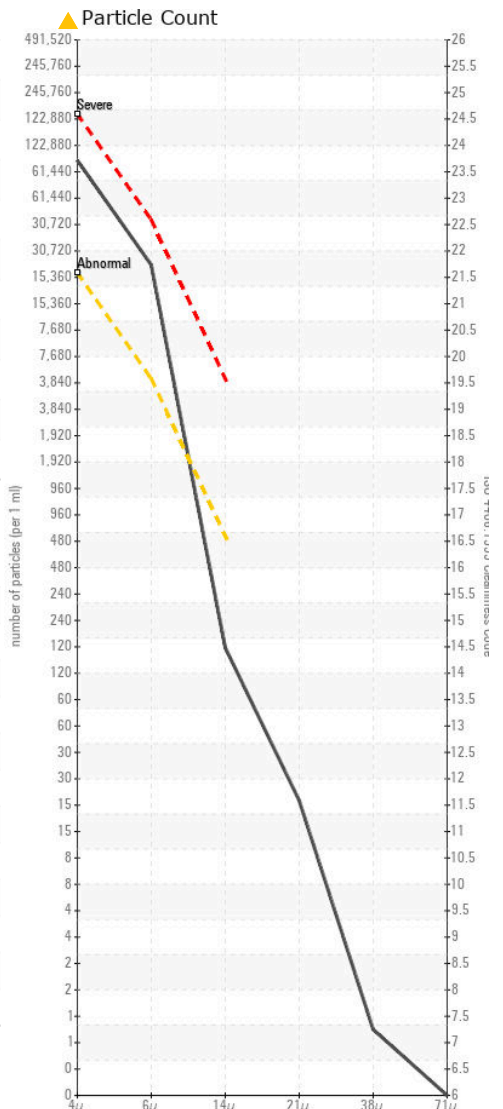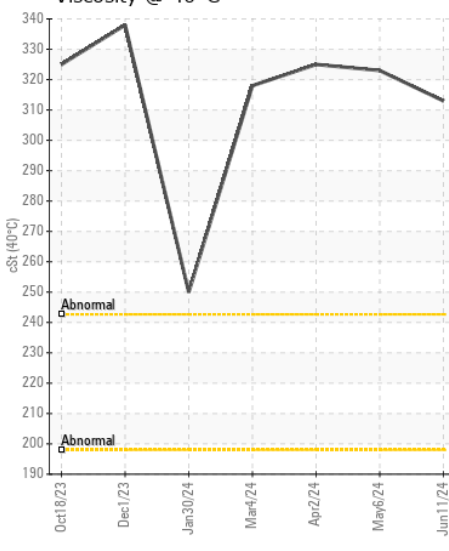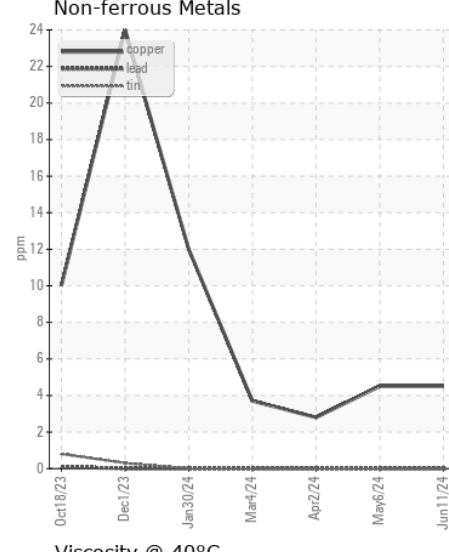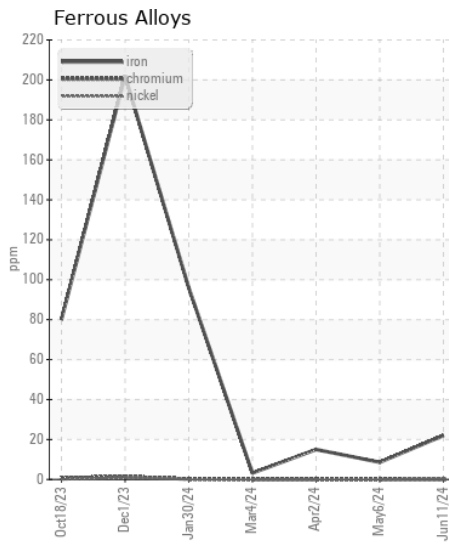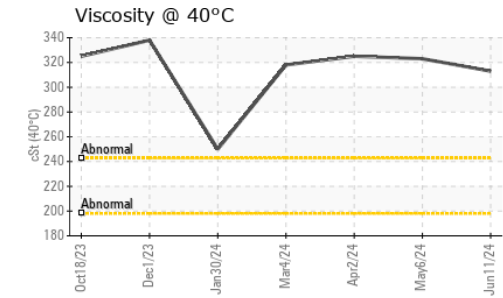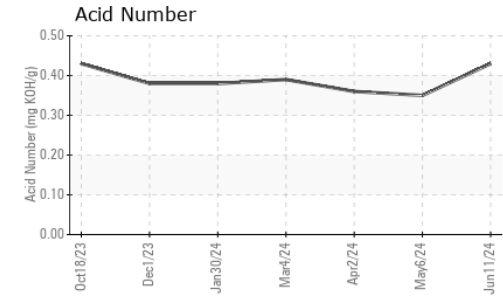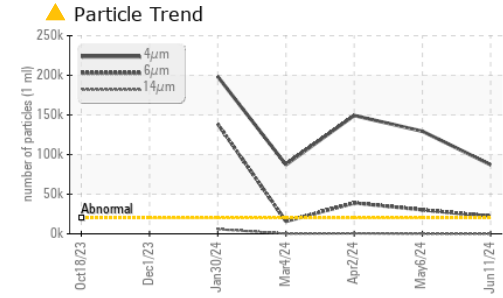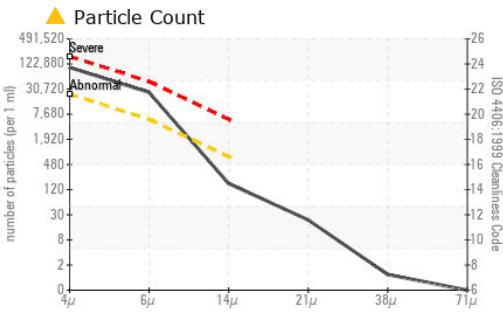

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0014481 **Received** : 20 Jun 2024
Lab Number : 06215785 **Tested** : 21 Jun 2024
Unique Number : 11088649 **Diagnosed** : 21 Jun 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: PrtCount)

PATTERSON - UTI DRILLING
 9915 WEST INDUSTRIAL
 MIDLAND, TX
 US 79706
 Contact: RICKY MATA
 ricky.mata@patenergy.com
 T: (832)219-4559
 F: (432)561-9388

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)