



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
OK16140 (S/N N20079302)
 Component
Hydraulic System
 Fluid
LE ISO 68 (1500 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PH0000067	---	---
Sample Date		Client Info		27 Apr 2024	---	---
Machine Age	mths	Client Info		0	---	---
Oil Age	mths	Client Info		32	---	---
Filter Age	mths	Client Info		32	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	0	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>20	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>20	0	---	---
Lead	ppm	ASTM D5185m	>20	0	---	---
Copper	ppm	ASTM D5185m	>20	0	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Elemental level of silicon (Si) above normal. The amount and size of particulates present in the system are acceptable.


Silicon	ppm	ASTM D5185m	>15	▲ 40	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.05	NEG	---	---
Particles >4µm		ASTM D7647	>10000	1699	---	---
Particles >6µm		ASTM D7647	>2500	284	---	---
Particles >14µm		ASTM D7647	>320	8	---	---
Particles >21µm		ASTM D7647	>80	1	---	---
Particles >38µm		ASTM D7647	>20	0	---	---
Particles >71µm		ASTM D7647	>4	0	---	---
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/15/10	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---

FLUID CONDITION


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		0	---	---
Calcium	ppm	ASTM D5185m		0	---	---
Phosphorus	ppm	ASTM D5185m		83	---	---
Zinc	ppm	ASTM D5185m		26	---	---
Sulfur	ppm	ASTM D5185m		254	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.31	---	---
Visc @ 40°C	cSt	ASTM D445		66.3	---	---

▲ Silicon (ppm)

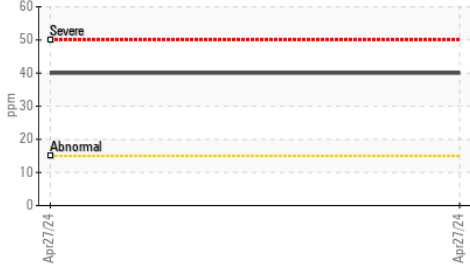


Ferrous Alloys

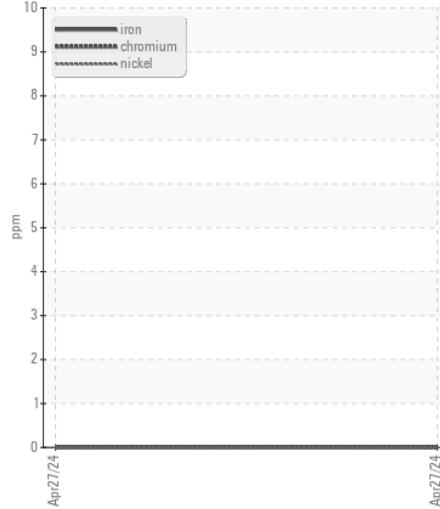


Particle Filter (Magn; 200 x)




Particle Count

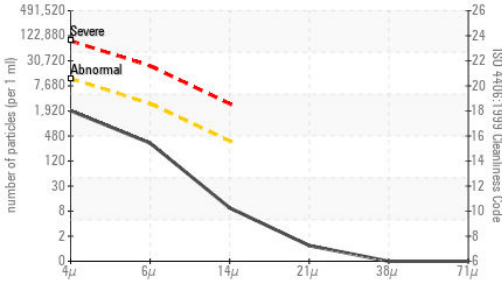


Non-ferrous Metals

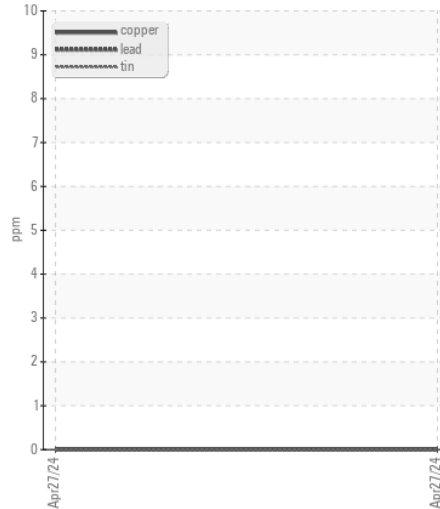


Acid Number

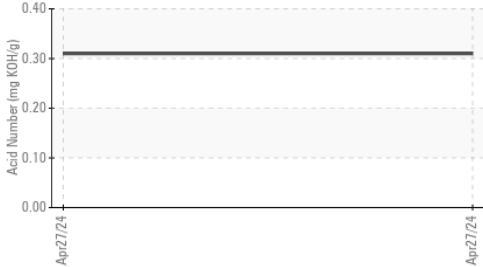


Viscosity @ 40°C

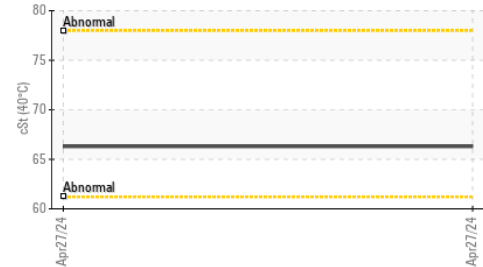


Viscosity @ 40°C

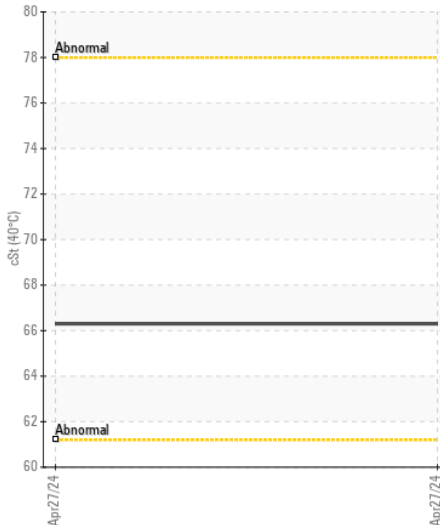

Acid Number

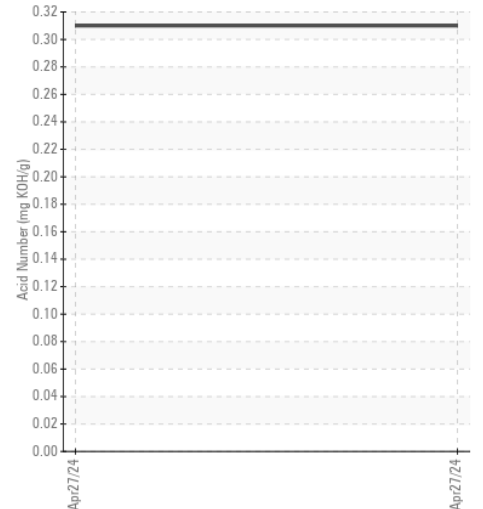

Particle Trend

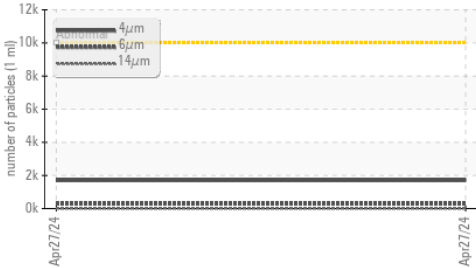

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : PH0000067
 Lab Number : 06215792
 Unique Number : 11088656
 Test Package : PLANT (Additional Tests: PrtFilter)
 Received : 20 Jun 2024
 Tested : 24 Jun 2024
 Diagnosed : 24 Jun 2024 - Doug Bogart

SCHWANS PRODUCTS
 5 E WALNUT
 STILWELL, OK
 US 74960
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: