



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
7 - CALLENDAR OFF BALANCE MILLS
 Component
Gearbox
 Fluid
TRC 890 VARI-PURPOSE 85W140 (120 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06215897	---	---
Sample Date		Client Info		10 Jun 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	33	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	7	---	---
Lead	ppm	ASTM D5185m	>50	5	---	---
Copper	ppm	ASTM D5185m	>200	2	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	13	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		169	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		<1	---	---
Calcium	ppm	ASTM D5185m		28	---	---
Phosphorus	ppm	ASTM D5185m		825	---	---
Zinc	ppm	ASTM D5185m		19	---	---
Sulfur	ppm	ASTM D5185m		16534	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.63	---	---
Visc @ 40°C	cSt	ASTM D445	399	245	---	---
Visc @ 100°C	cSt	ASTM D445	29.5	23.5	---	---
Viscosity Index (VI)	Scale	ASTM D2270		119	---	---

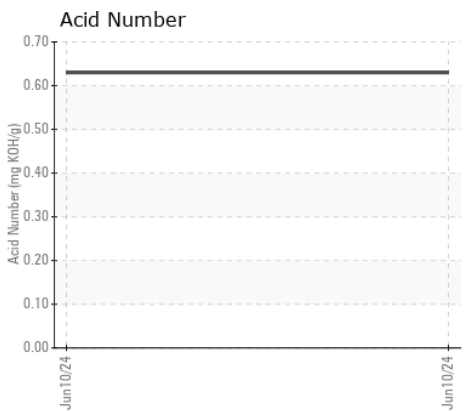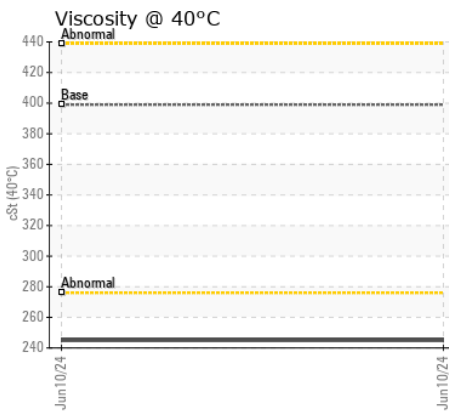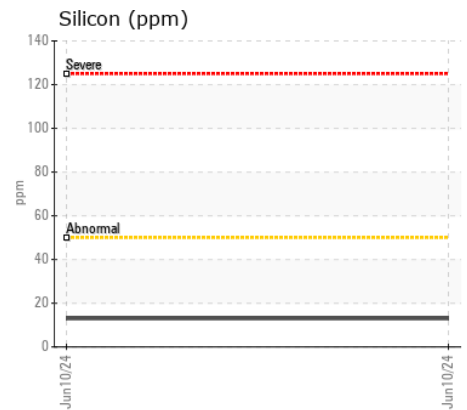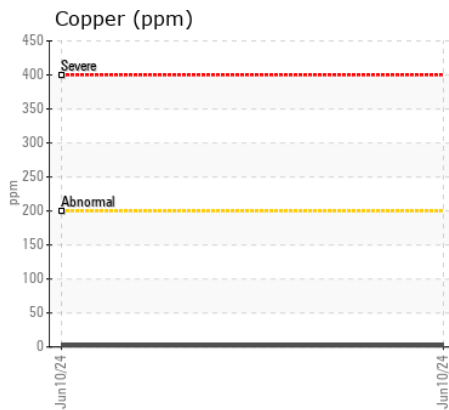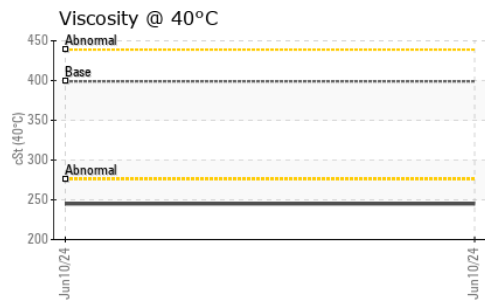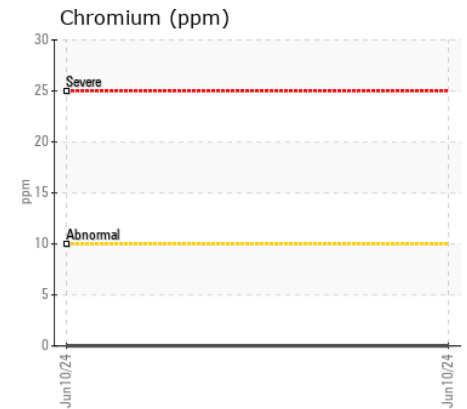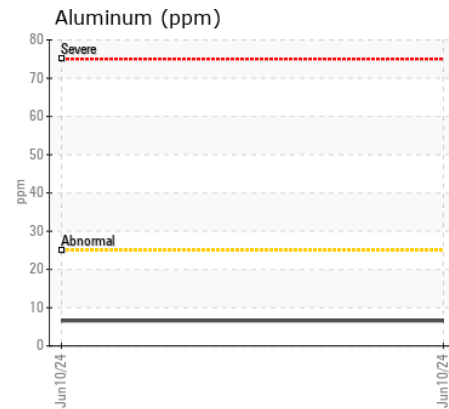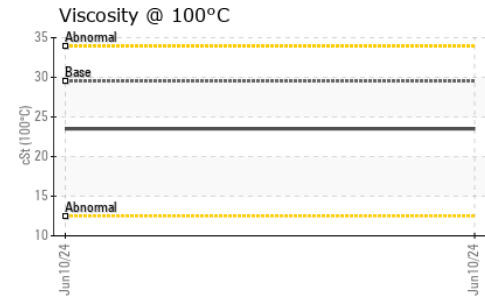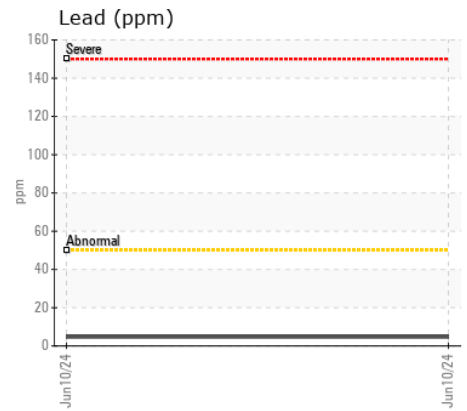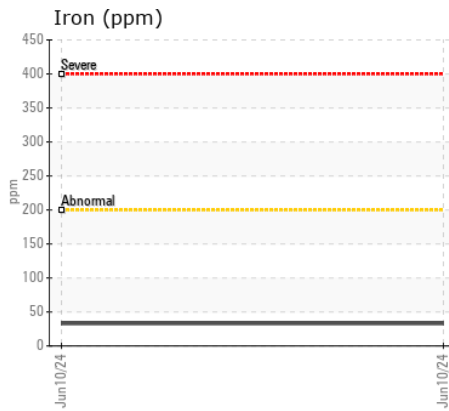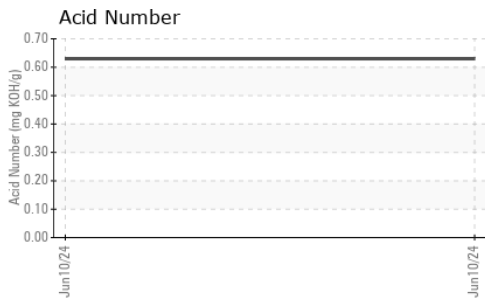

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06215897 **Received** : 20 Jun 2024
Lab Number : 06215897 **Tested** : 22 Jun 2024
Unique Number : 11088761 **Diagnosed** : 23 Jun 2024 - Don Baldrige
Test Package : MOB 2 (Additional Tests: KV100, VI)

CARLSTAR GROUP - FORMERLY CARLISLE TIRE
 520 JD YARNELL IND. PKWY
 CLINTON, TN
 US 37716
 Contact: JOHN GAINES

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (865)463-3696