



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id 9 - FABRIC CALENDAR

Component
Main Drive

Fluid
TRC 890 VARI-PURPOSE 85W140 (60 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06215905	TR06122587	TR06029530
Sample Date		Client Info		10 Jun 2024	13 Mar 2024	21 Nov 2023
Machine Age	yrs	Client Info		0	0	0
Oil Age	yrs	Client Info		0	0	0
Filter Age	yrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	82	45	53
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	0	<1
Lead	ppm	ASTM D5185m	>10	67	46	57
Copper	ppm	ASTM D5185m	>25	1	0	<1
Tin	ppm	ASTM D5185m	>5	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	27	24	22
Potassium	ppm	ASTM D5185m	>20	0	0	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	0.2%

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	<1	<1
Boron	ppm	ASTM D5185m		<1	0	6
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		6	3	4
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		3	1	0
Phosphorus	ppm	ASTM D5185m		598	546	594
Zinc	ppm	ASTM D5185m		3	0	0
Sulfur	ppm	ASTM D5185m		21391	20518	18836
Acid Number (AN)	mg KOH/g	ASTM D8045		0.95	1.03	0.81
Visc @ 40°C	cSt	ASTM D445	399	312	309	307
Visc @ 100°C	cSt	ASTM D445	29.5	24.8	24.6	24.6
Viscosity Index (VI)	Scale	ASTM D2270		101	101	102

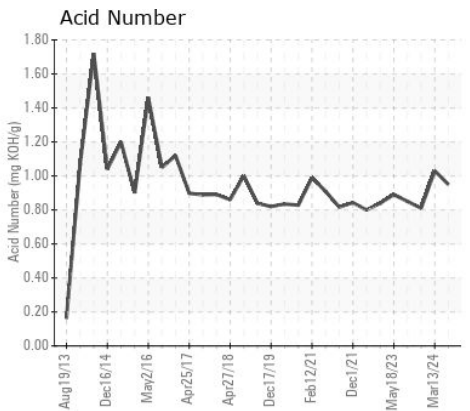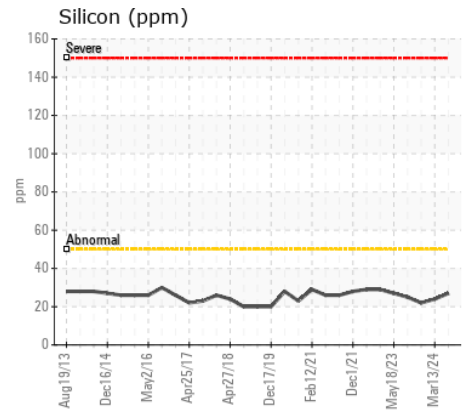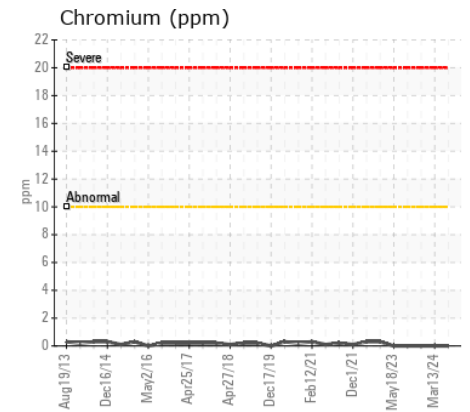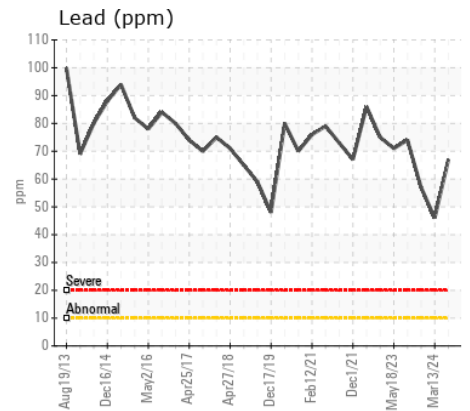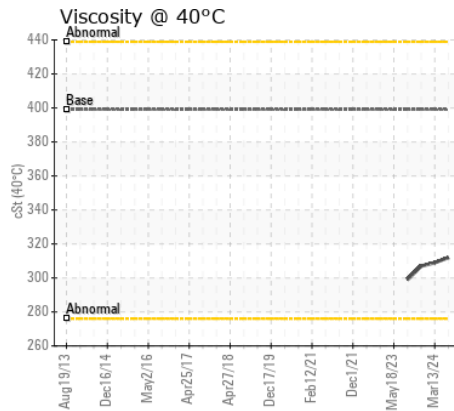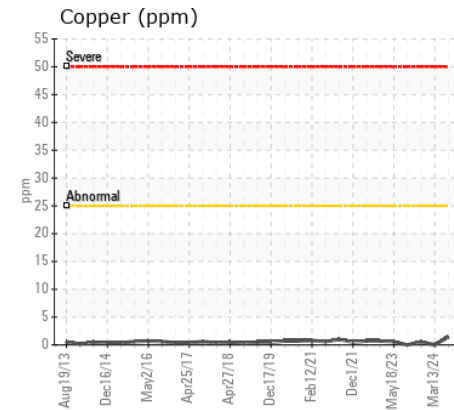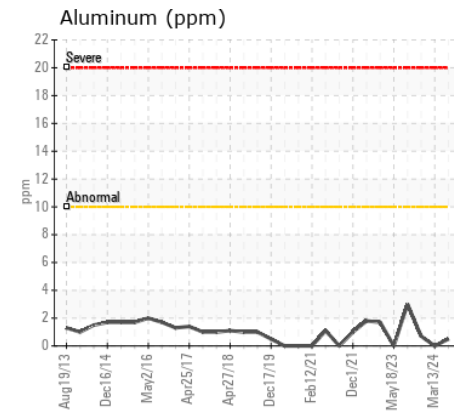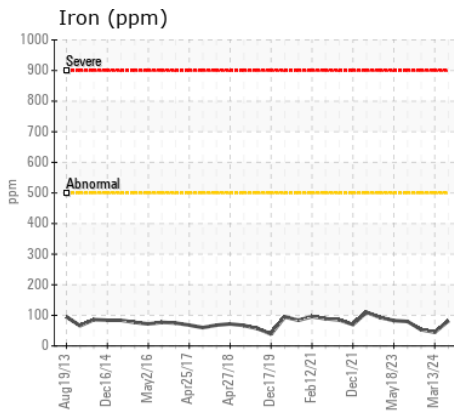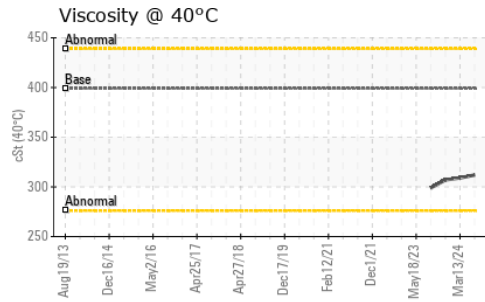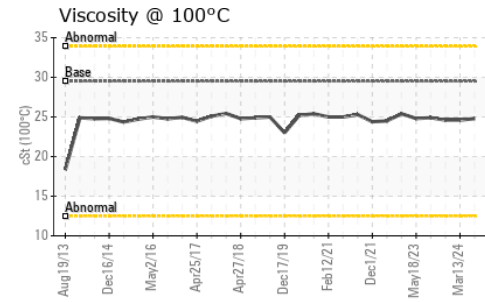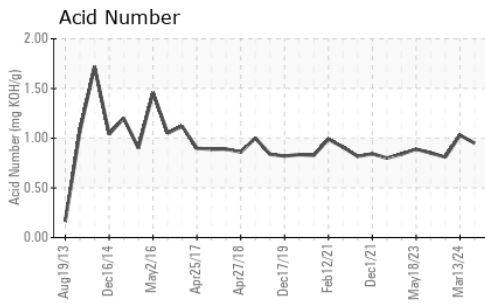

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : TR06215905

Lab Number : 06215905

Unique Number : 11088769

Test Package : MOB 2 (Additional Tests: KV100, VI)

Received : 20 Jun 2024

Tested : 22 Jun 2024

Diagnosed : 23 Jun 2024 - Don Baldrige

CARLSTAR GROUP - FORMERLY CARLISLE TIRE

520 JD YARNELL IND. PKWY

CLINTON, TN

US 37716

Contact: JOHN GAINES

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: (865)463-3696