



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PU263
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0122458	PCA0122458	---
Sample Date		Client Info		18 Jun 2024	18 Jun 2024	---
Machine Age	mls	Client Info		233500	233500	---
Oil Age	mls	Client Info		233500	233500	---
Filter Age	mls	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	4	27	---
Chromium	ppm	ASTM D5185m	>20	0	2	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	1	12	---
Lead	ppm	ASTM D5185m	>40	0	1	---
Copper	ppm	ASTM D5185m	>330	0	79	---
Tin	ppm	ASTM D5185m	>15	0	2	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	4	---
Potassium	ppm	ASTM D5185m	>20	0	31	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	8.7	9.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.9	20.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	4	---
Boron	ppm	ASTM D5185m	0	4	3	---
Barium	ppm	ASTM D5185m	0	0	<1	---
Molybdenum	ppm	ASTM D5185m	60	58	57	---
Manganese	ppm	ASTM D5185m	0	<1	1	---
Magnesium	ppm	ASTM D5185m	1010	992	902	---
Calcium	ppm	ASTM D5185m	1070	1221	1359	---
Phosphorus	ppm	ASTM D5185m	1150	1123	982	---
Zinc	ppm	ASTM D5185m	1270	1368	1225	---
Sulfur	ppm	ASTM D5185m	2060	3932	2543	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.4	19.5	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	9.79	6.9	---
Visc @ 100°C	cSt	ASTM D445	15.4	14.4	11.3	---

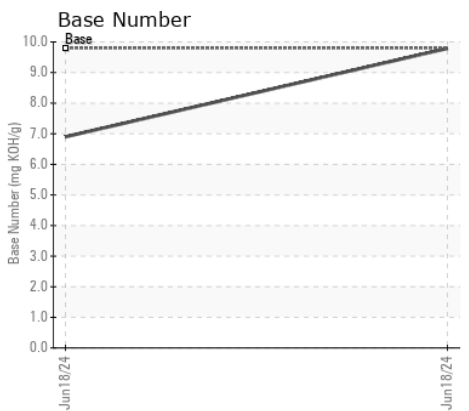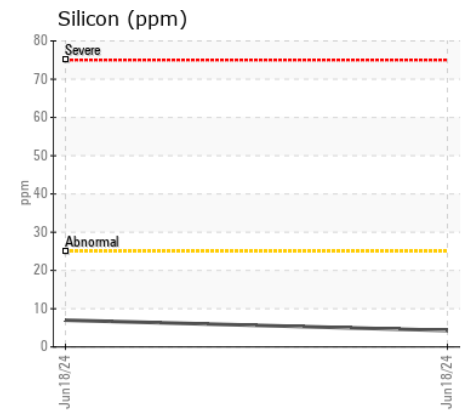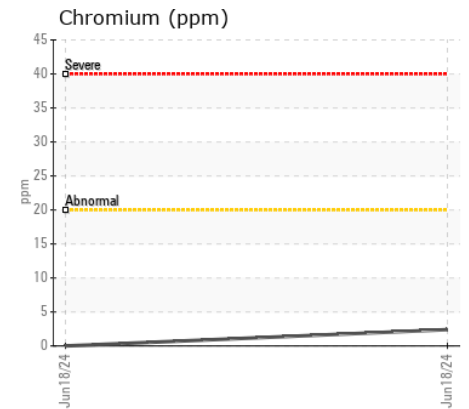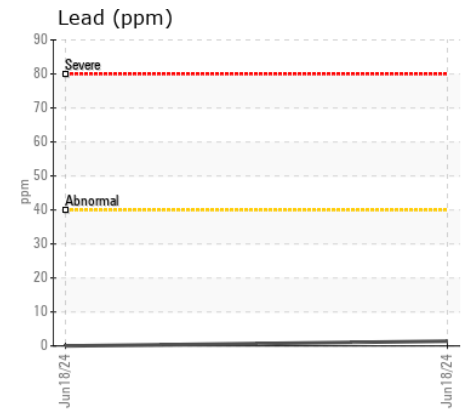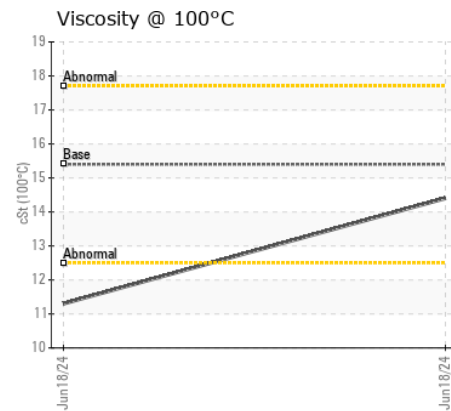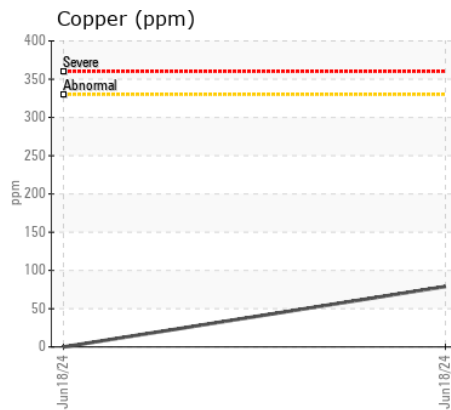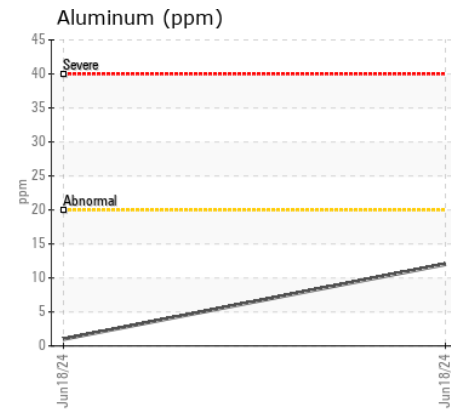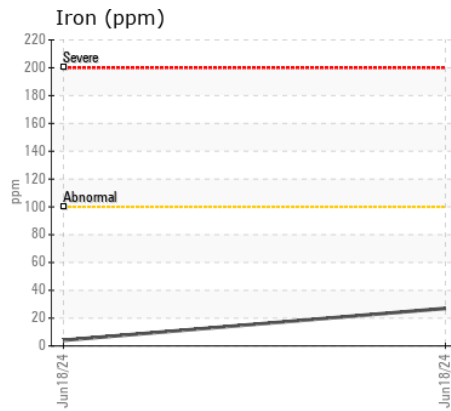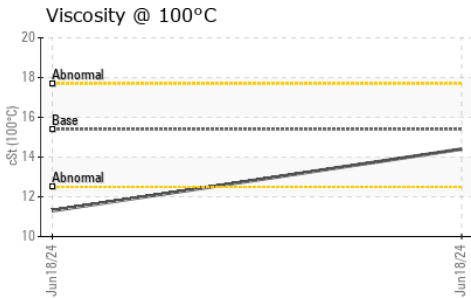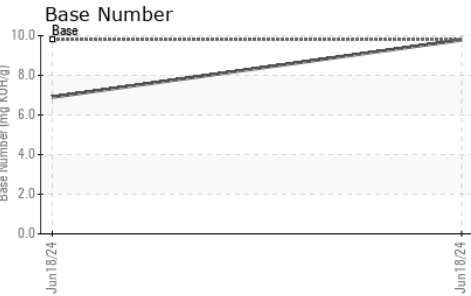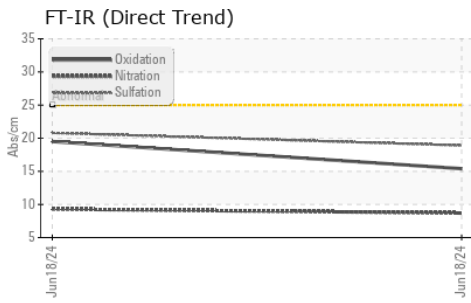

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0122458 **Received** : 20 Jun 2024
Lab Number : 06215923 **Tested** : 22 Jun 2024
Unique Number : 11088787 **Diagnosed** : 22 Jun 2024 - Wes Davis
Test Package : MOB 2

G LOPES CONSTRUCTION
 565 WINTHROP ST
 TAUNTON, MA
 US 02780
 Contact: BUTCH MCGRATH
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: