



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**G. LOPES CONSTRUCTION INC./Off-Road**  
Machine Id  
**L336**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0122983</b>	PCA0023323	PCA0109813
Sample Date		Client Info		<b>18 Jun 2024</b>	01 Apr 2024	07 Nov 2023
Machine Age	hrs	Client Info		<b>9919</b>	9919	9487
Oil Age	hrs	Client Info		<b>5145</b>	5577	5470
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>20</b>	13	10
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	1	2
Lead	ppm	ASTM D5185m	>40	<b>2</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>4</b>	4	3
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	5	6
Potassium	ppm	ASTM D5185m	>20	<b>11</b>	18	6
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.6</b>	10.3	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.8</b>	21.4	20.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>29</b>	46	16
Boron	ppm	ASTM D5185m	0	<b>2</b>	6	4
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m	60	<b>67</b>	66	61
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	1010	<b>1032</b>	945	881
Calcium	ppm	ASTM D5185m	1070	<b>1286</b>	1229	947
Phosphorus	ppm	ASTM D5185m	1150	<b>1112</b>	1039	1021
Zinc	ppm	ASTM D5185m	1270	<b>1364</b>	1230	1219
Sulfur	ppm	ASTM D5185m	2060	<b>3774</b>	3645	2865
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.3</b>	19.7	16.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.68</b>	8.53	10.06
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	13.3	13.6

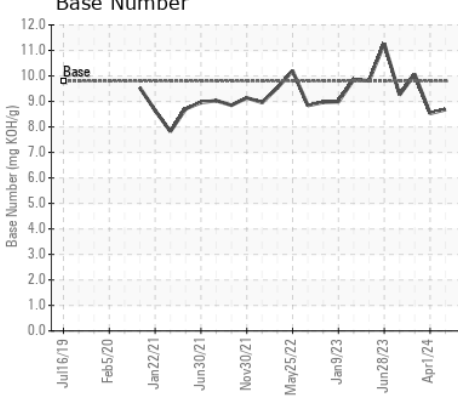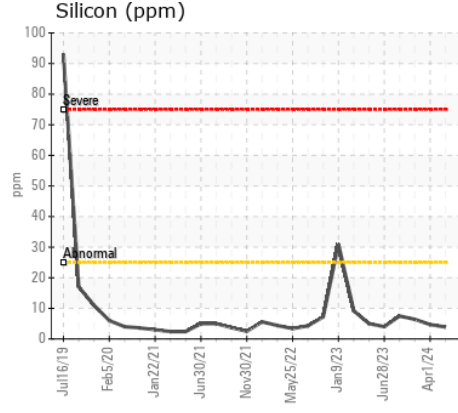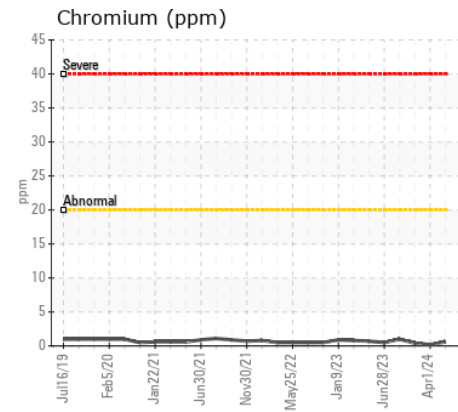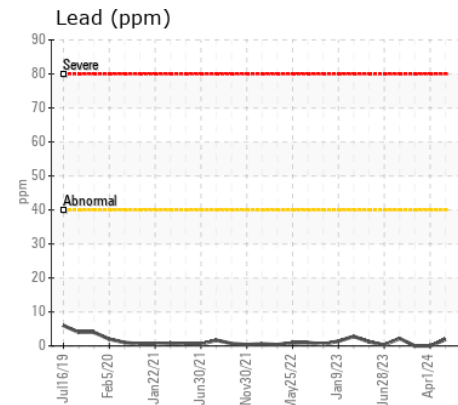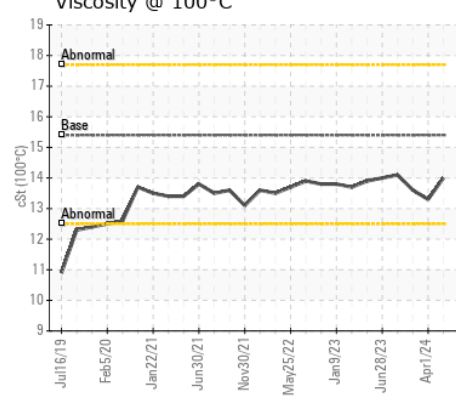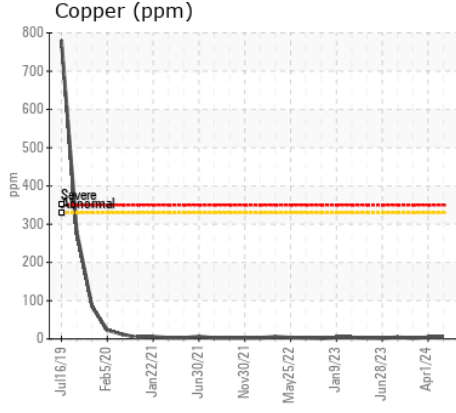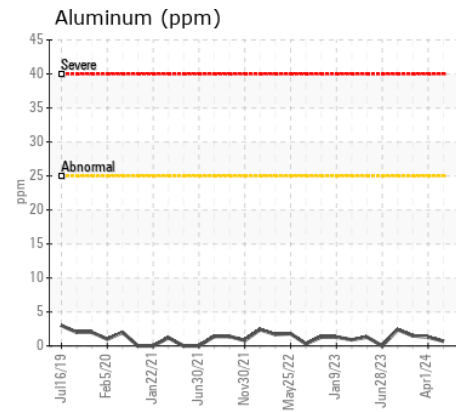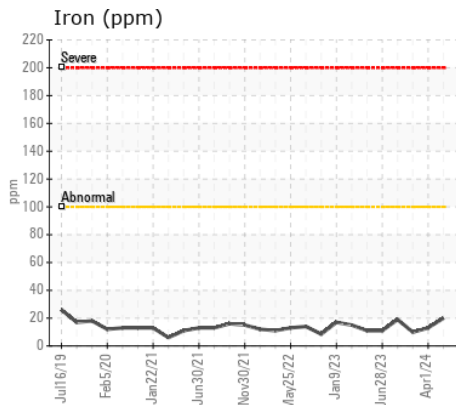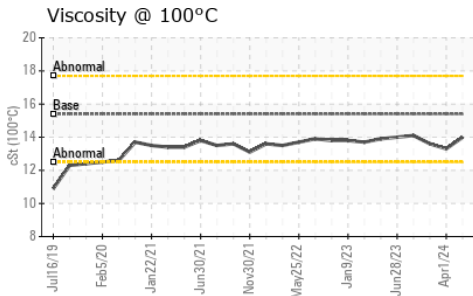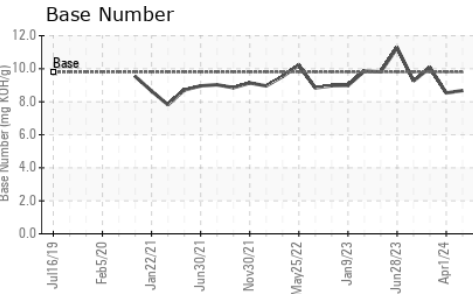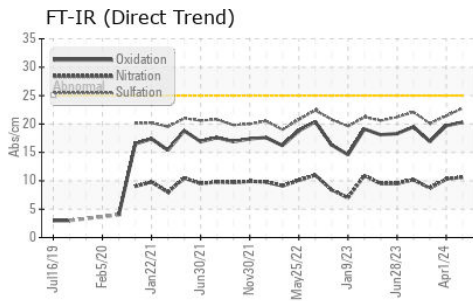

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0122983  
**Lab Number** : 06215933  
**Unique Number** : 11088797  
**Test Package** : MOB 2  
**Received** : 20 Jun 2024  
**Tested** : 22 Jun 2024  
**Diagnosed** : 22 Jun 2024 - Wes Davis

**G LOPES CONSTRUCTION**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: BUTCH MCGRATH  
 bmcgrath@glopes.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)