



# OIL ANALYSIS REPORT

WEAR	<b>SEVERE</b>
CONTAMINATION	<b>SEVERE</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[RO#152201]**  
Machine Id  
**JOHN DEERE 333G 1T0333GMPJF330716**  
Component  
**Left Propel Gearbox**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (1 QTS)**

## RECOMMENDATION

We advise that you check all areas where dirt can enter the system. We advise that you check for the source of water entry. The oil change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

## WEAR

The iron, chrome and nickel levels are severe. Gear wear is indicated.









## CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. There is a moderate concentration of water present in the oil.

## FLUID CONDITION

The oil is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0051782</b>	LEC0011826	---
Sample Date		Client Info		<b>18 Jun 2024</b>	26 May 2020	---
Machine Age	hrs	Client Info		<b>1372</b>	534	---
Oil Age	hrs	Client Info		<b>838</b>	534	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	Changed	---
Sample Status				<b>SEVERE</b>	ABNORMAL	---
PQ		ASTM D8184		<b>385</b>	136	---
Iron	ppm	ASTM D5185m	>1250	<b>▲ 6458</b>	▲ 1814	---
Chromium	ppm	ASTM D5185m	>10	<b>▲ 61</b>	▲ 22	---
Nickel	ppm	ASTM D5185m	>10	<b>▲ 39</b>	11	---
Titanium	ppm	ASTM D5185m		<b>25</b>	4	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m		<b>● 291</b>	● 36	---
Lead	ppm	ASTM D5185m		<b>1</b>	<1	---
Copper	ppm	ASTM D5185m		<b>7</b>	3	---
Tin	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>3</b>	1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silicon	ppm	ASTM D5185m		<b>▲ 1717</b>	▲ 195	---
Potassium	ppm	ASTM D5185m	>20	<b>113</b>	56	---
Water	%	ASTM D6304	>0.2	<b>▲ 0.625</b>	0.097	---
ppm Water	ppm	ASTM D6304	>2000	<b>▲ 6250</b>	970	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>▲ 0.2%</b>	0.2%	---
Sodium	ppm	ASTM D5185m		<b>21</b>	25	---
Boron	ppm	ASTM D5185m	6	<b>70</b>	108	---
Barium	ppm	ASTM D5185m	0	<b>28</b>	94	---
Molybdenum	ppm	ASTM D5185m	0	<b>10</b>	0	---
Manganese	ppm	ASTM D5185m		<b>53</b>	21	---
Magnesium	ppm	ASTM D5185m	145	<b>121</b>	32	---
Calcium	ppm	ASTM D5185m	3570	<b>2803</b>	59	---
Phosphorus	ppm	ASTM D5185m	1290	<b>968</b>	892	---
Zinc	ppm	ASTM D5185m	1640	<b>1057</b>	41	---
Sulfur	ppm	ASTM D5185m		<b>16092</b>	26651	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>74.5</b>	149	---

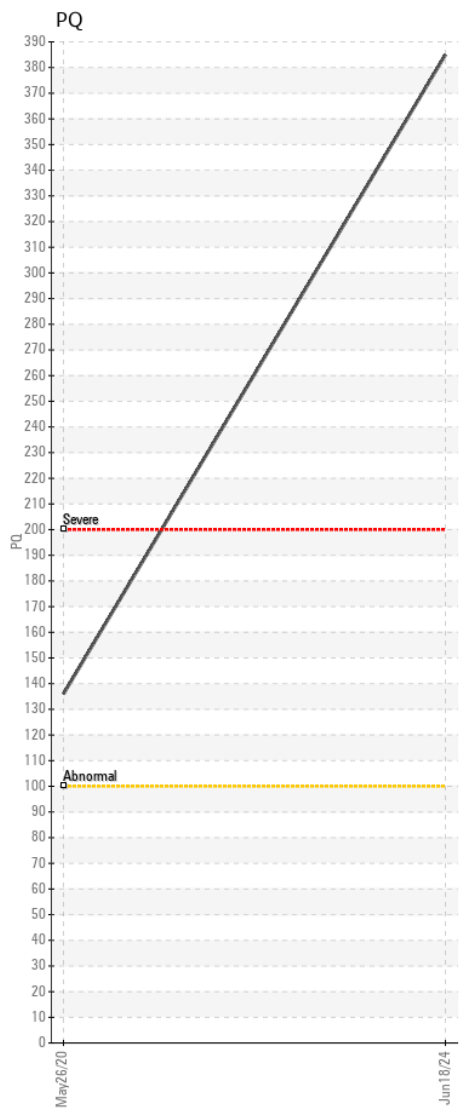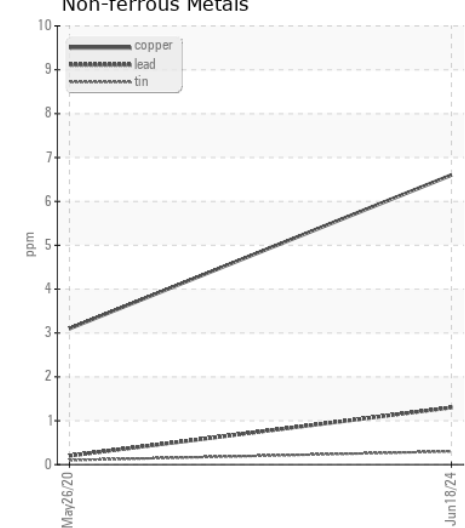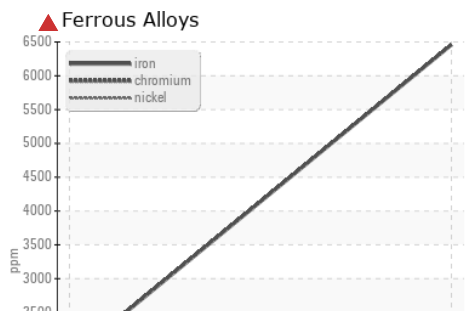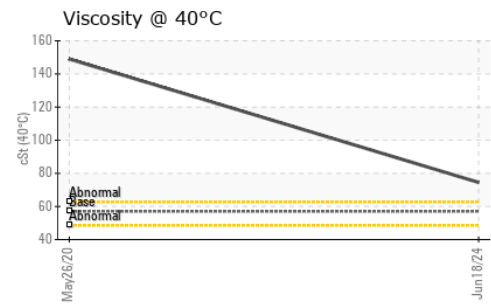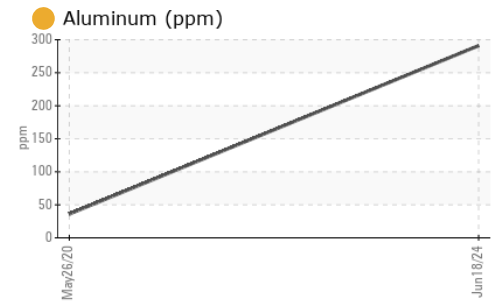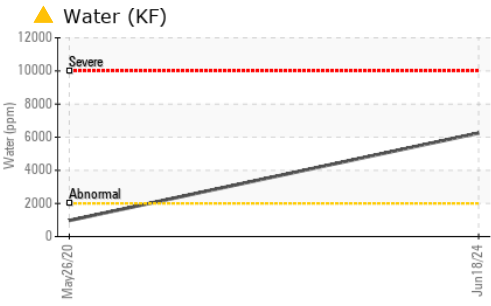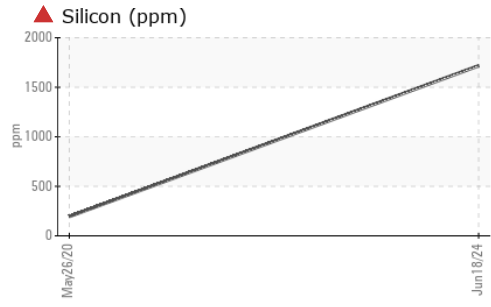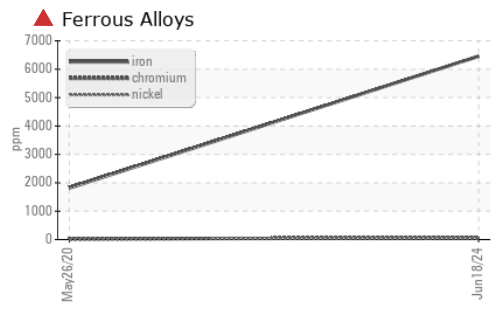

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0051782 **Received** : 20 Jun 2024  
**Lab Number** : 06215968 **Tested** : 22 Jun 2024  
**Unique Number** : 11088832 **Diagnosed** : 23 Jun 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: KF, PQ )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com  
 T:  
 F: (740)373-5570

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)