



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 650K 1T0650KKLNF418076
 Component
Rear Right Final Drive
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.








CONTAMINATION

There is a light concentration of water present in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LECC0048687	---	---
Sample Date		Client Info		20 Jun 2024	---	---
Machine Age	hrs	Client Info		501	---	---
Oil Age	hrs	Client Info		501	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---
PQ		ASTM D8184	>1250	36	---	---
Iron	ppm	ASTM D5185m	>750	50	---	---
Chromium	ppm	ASTM D5185m	>9	1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	1	---	---
Lead	ppm	ASTM D5185m	>15	0	---	---
Copper	ppm	ASTM D5185m	>40	0	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>75	8	---	---
Potassium	ppm	ASTM D5185m	>20	7	---	---
Water	%	ASTM D6304	>0.075	▲ 0.273	---	---
ppm Water	ppm	ASTM D6304	>750	▲ 2730	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	0.2%	---	---
Sodium	ppm	ASTM D5185m	>51	5	---	---
Boron	ppm	ASTM D5185m		2	---	---
Barium	ppm	ASTM D5185m		3	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		96	---	---
Calcium	ppm	ASTM D5185m		3346	---	---
Phosphorus	ppm	ASTM D5185m		1063	---	---
Zinc	ppm	ASTM D5185m		1233	---	---
Sulfur	ppm	ASTM D5185m		4385	---	---
Visc @ 40°C	cSt	ASTM D445		53.4	---	---

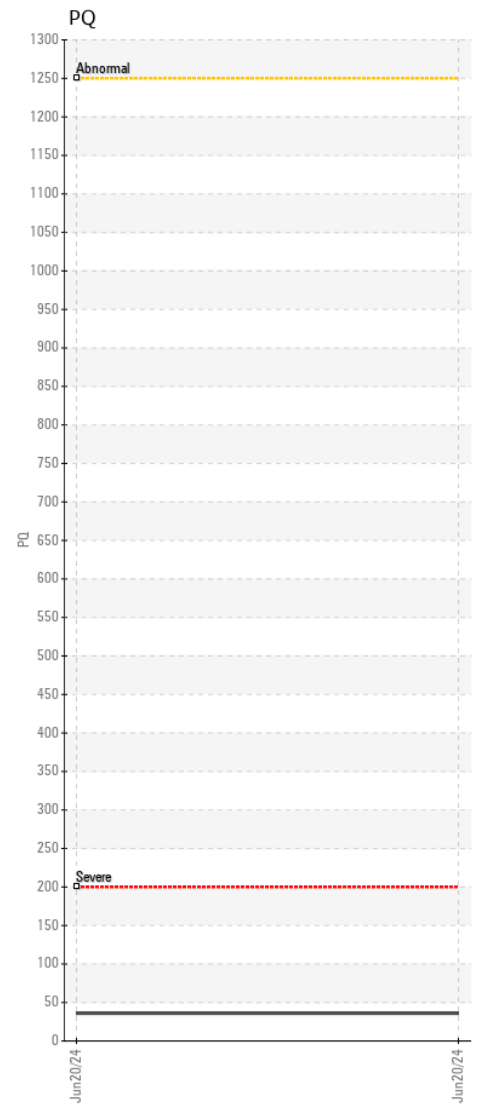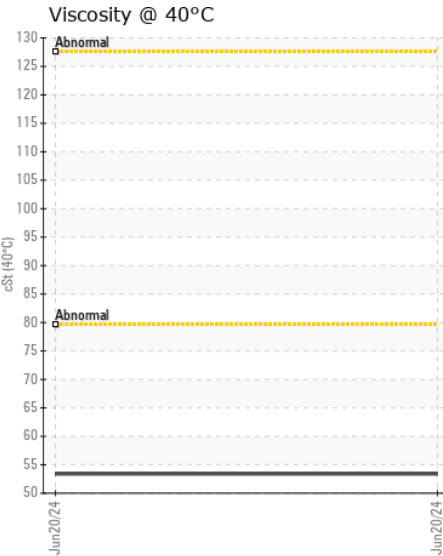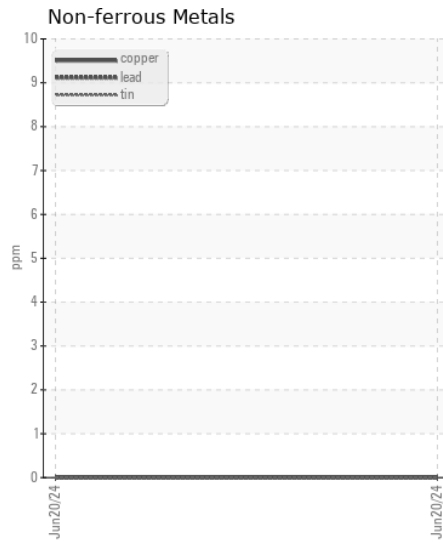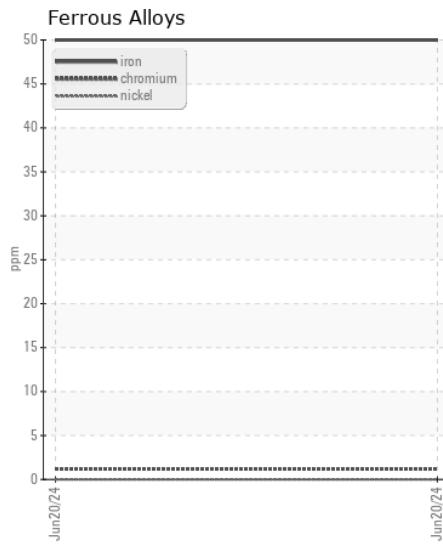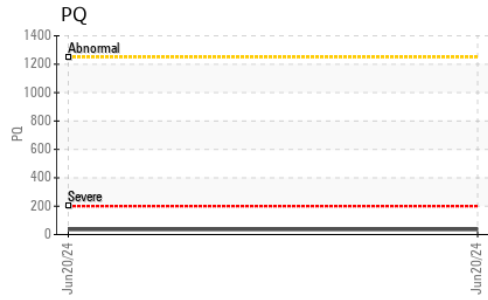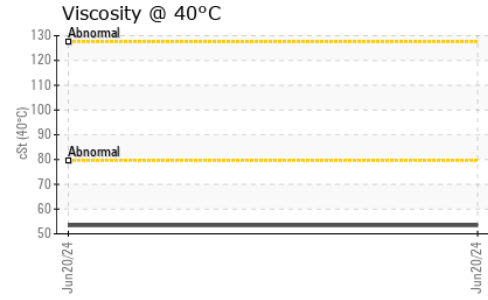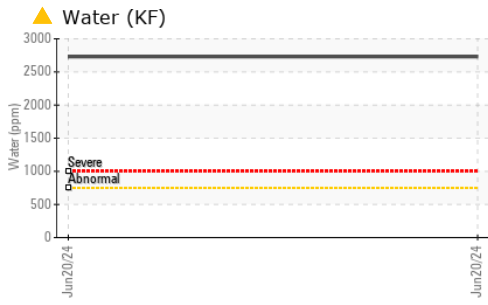

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0048687 **Received** : 20 Jun 2024
Lab Number : **06215986** **Tested** : 22 Jun 2024
Unique Number : 11088850 **Diagnosed** : 23 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: KF, PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ARNETTS EXCAVATION
 462 MILL BRANCH RD
 SALYERSVILLE, KY
 US 41465

Contact: Service Manager
 arnettsexcavation@yahoo.com

T: (606)496-6400

F: