



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[W9012]

Machine Id

JOHN DEERE 843L-II 1DW843LBCPL718522

Component

Rear Axle

Fluid

TDH FLUID SAE 75W80 (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W9012)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0196894	---	---
Sample Date		Client Info		14 Jun 2024	---	---
Machine Age	hrs	Client Info		499	---	---
Oil Age	hrs	Client Info		499	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		41	---	---
Iron	ppm	ASTM D5185m	>750	87	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>21	<1	---	---
Lead	ppm	ASTM D5185m	>49	2	---	---
Copper	ppm	ASTM D5185m	>101	9	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	7	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	6	---	---
Boron	ppm	ASTM D5185m	10	1	---	---
Barium	ppm	ASTM D5185m	10	9	---	---
Molybdenum	ppm	ASTM D5185m	10	0	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m	100	100	---	---
Calcium	ppm	ASTM D5185m	3500	3525	---	---
Phosphorus	ppm	ASTM D5185m	1150	1097	---	---
Zinc	ppm	ASTM D5185m	1150	1313	---	---
Sulfur	ppm	ASTM D5185m	5000	4341	---	---
Visc @ 40°C	cSt	ASTM D445	48	54.3	---	---

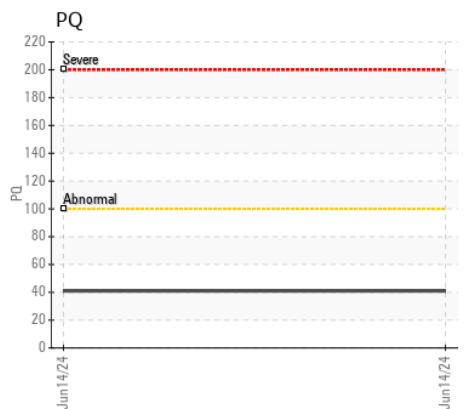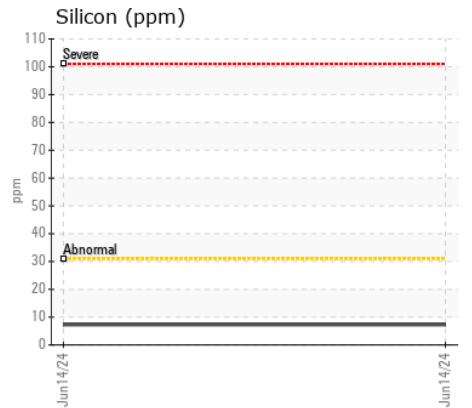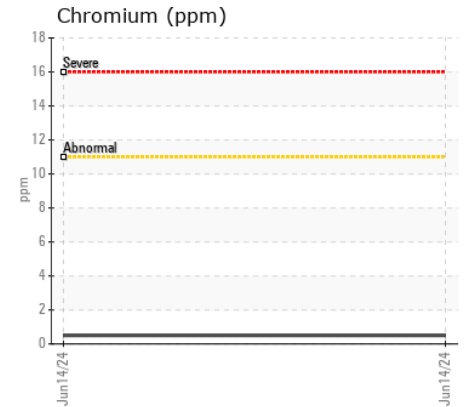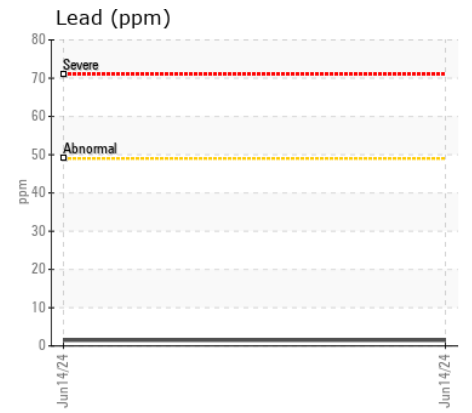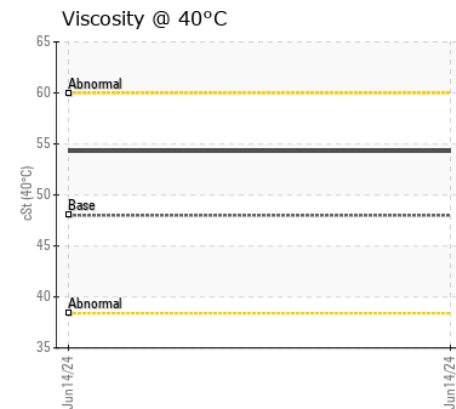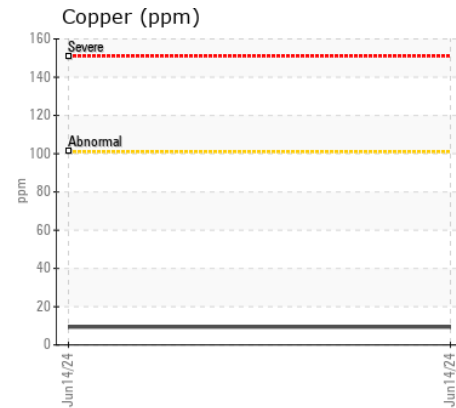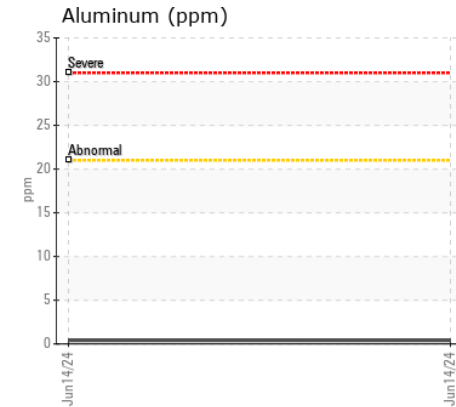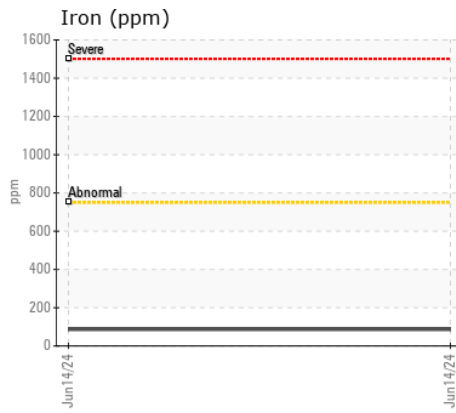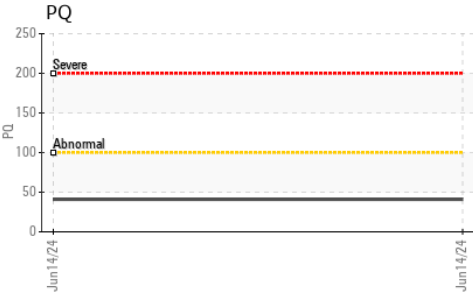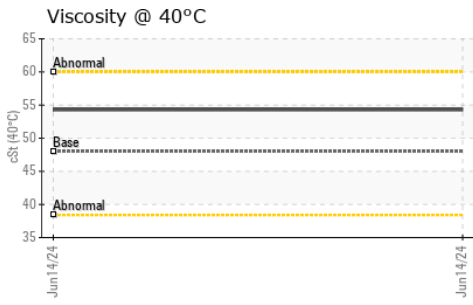

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0196894 **Received** : 20 Jun 2024
Lab Number : 06216012 **Tested** : 22 Jun 2024
Unique Number : 11088876 **Diagnosed** : 23 Jun 2024 - Don Baldrige
Test Package : MOBCE (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - CASTLE HAYNE
 113 CROWATAN ROAD
 CASTLE HAYNE, NC
 US 28429-5819

Contact: WILMINGTON SHOP

todd.simmons@jamesriverequipment.com; canastasio@wearcheck.com; canastasio@we

T: (910)675-9211

F: