



Machine Id
JOHN DEERE 524K 1T0700KXTKF361569
Component
Right Final Drive
Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0218286	---	---
Sample Date		Client Info		04 Jun 2024	---	---
Machine Age	hrs	Client Info		6918	---	---
Oil Age	hrs	Client Info		1000	---	---
Filter Age	hrs	Client Info		1000	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				SEVERE	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	226	---	---
Iron	ppm	ASTM D5185m	>750	997	---	---
Chromium	ppm	ASTM D5185m	>9	10	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		3	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	44	---	---
Lead	ppm	ASTM D5185m	>15	0	---	---
Copper	ppm	ASTM D5185m	>40	2	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>75	171	---	---
Potassium	ppm	ASTM D5185m	>20	10	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m	>51	5	---	---
Boron	ppm	ASTM D5185m		30	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		5	---	---
Manganese	ppm	ASTM D5185m		13	---	---
Magnesium	ppm	ASTM D5185m		13	---	---
Calcium	ppm	ASTM D5185m		193	---	---
Phosphorus	ppm	ASTM D5185m		521	---	---
Zinc	ppm	ASTM D5185m		110	---	---
Sulfur	ppm	ASTM D5185m		27560	---	---
Visc @ 40°C	cSt	ASTM D445		121	---	---

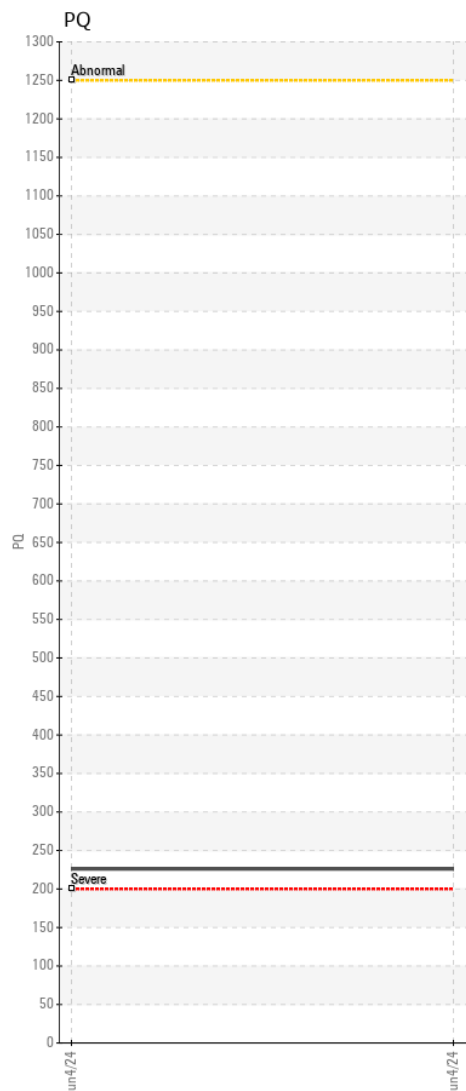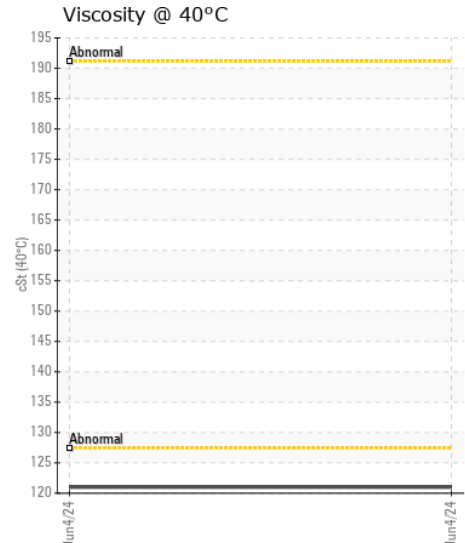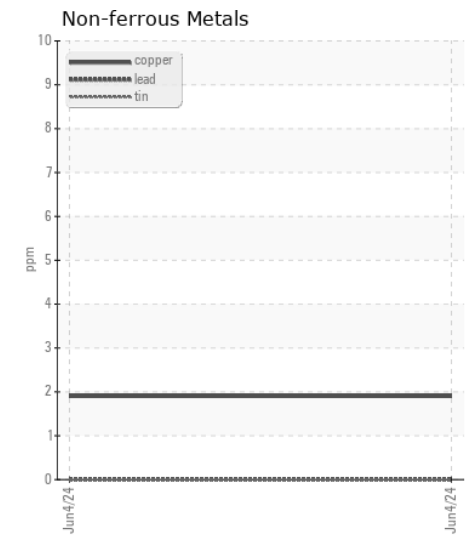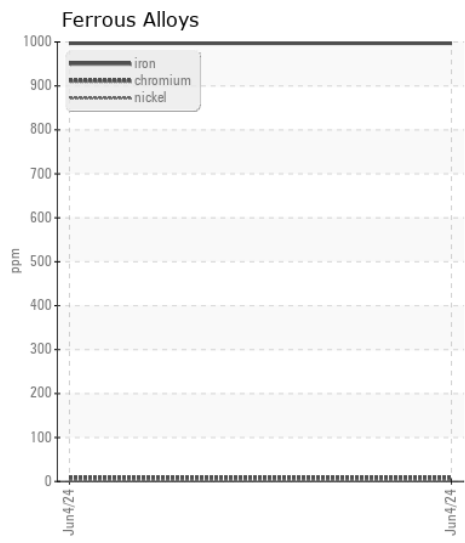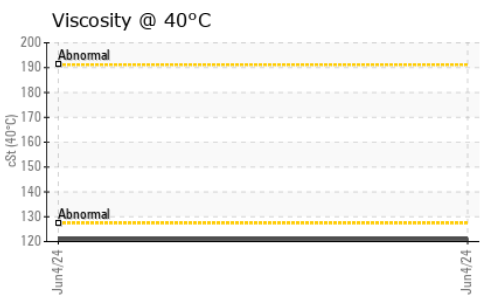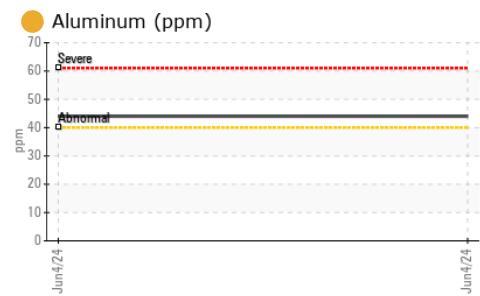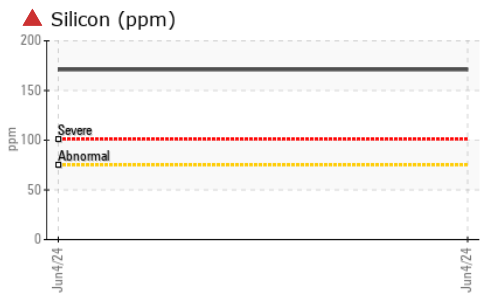

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0218286
Lab Number : 06216037
Unique Number : 11088901
Test Package : CONST (Additional Tests: PQ)

TOTAL DEVELOPMENT SOLUTIONS LLC
 7805 PROGRESS CT
 GAINESVILLE, VA
 US 20155
 Contact: JOE SEALE

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (571)220-7763
 F: (703)753-4586