



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[47372]

Machine Id

JOHN DEERE 655K 1T0655KXHNF413079

Component

Right Outer Final Drive

Fluid

JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0218659	JR0160365	---
Sample Date		Client Info		19 Jun 2024	28 Feb 2023	---
Machine Age	hrs	Client Info		961	451	---
Oil Age	hrs	Client Info		961	451	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	None	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	42	36	---
Iron	ppm	ASTM D5185m	>750	52	39	---
Chromium	ppm	ASTM D5185m	>9	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>40	6	4	---
Lead	ppm	ASTM D5185m	>15	<1	0	---
Copper	ppm	ASTM D5185m	>40	<1	<1	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	16	11	---
Potassium	ppm	ASTM D5185m	>20	2	1	---
Water		WC Method	>0.075	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	4	2	---
Boron	ppm	ASTM D5185m	6	4	4	---
Barium	ppm	ASTM D5185m	0	4	4	---
Molybdenum	ppm	ASTM D5185m	0	0	<1	---
Manganese	ppm	ASTM D5185m		1	<1	---
Magnesium	ppm	ASTM D5185m	145	93	100	---
Calcium	ppm	ASTM D5185m	3570	3386	3510	---
Phosphorus	ppm	ASTM D5185m	1290	999	992	---
Zinc	ppm	ASTM D5185m	1640	1160	1248	---
Sulfur	ppm	ASTM D5185m		3833	4177	---
Visc @ 40°C	cSt	ASTM D445	57.0	54.5	56.3	---

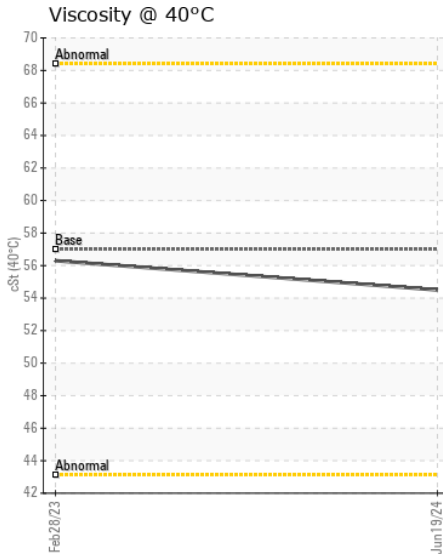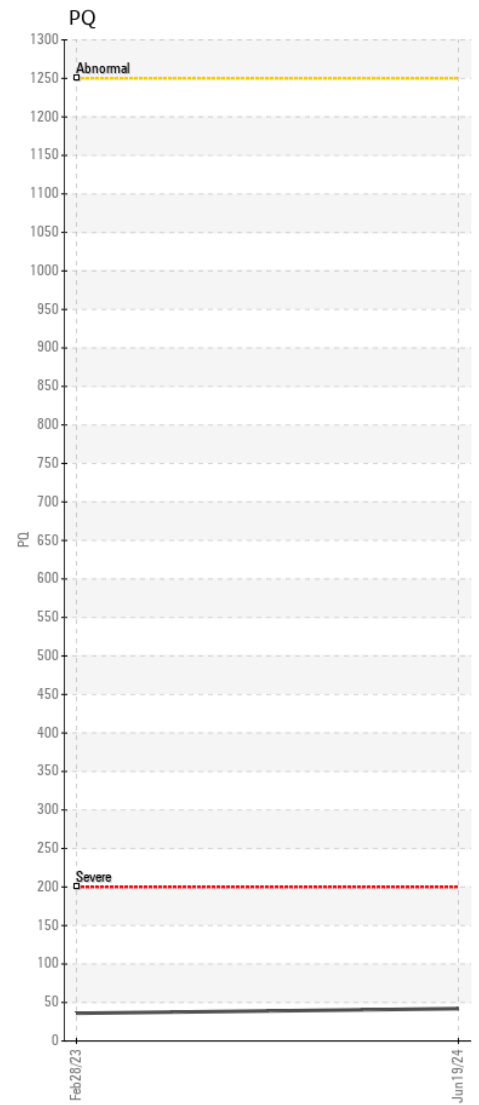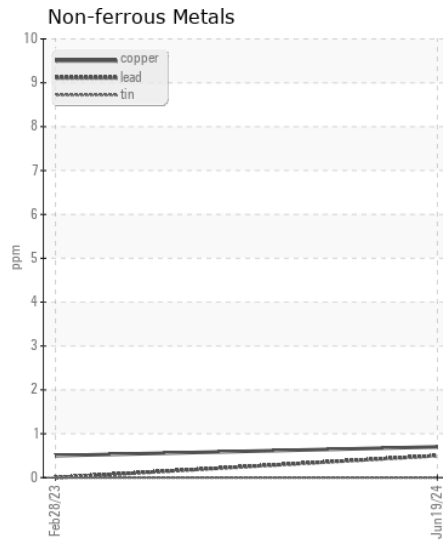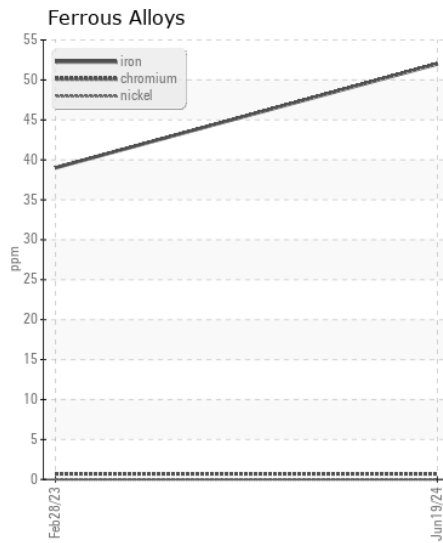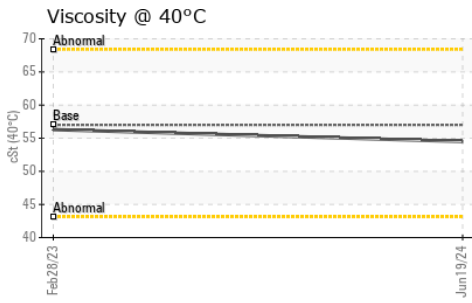

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0218659

Lab Number : 06216049

Unique Number : 11088913

Test Package : CONST (Additional Tests: PQ)

Received : 20 Jun 2024

Tested : 22 Jun 2024

Diagnosed : 22 Jun 2024 - Wes Davis

JRE - MANASSAS PARK

9107 OWENS DRIVE

MANASSAS PARK, VA

US 20111

Contact: DON VEST

dvest@jamesriverequipment.com

T: (703)631-8500

F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)