



VOLVO PENTA

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
AL POLLAN [00100103]
Machine Id
VOLVO PENTA 3194003610
Component
Port IPS
Fluid
VOLVO API GL-5 SAE 75W90 (4 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA062579	VPA042708	---
Sample Date		Client Info		11 Jun 2024	07 Mar 2023	---
Machine Age	hrs	Client Info		1285	1113	---
Oil Age	hrs	Client Info		172	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Changed	---
Filter Changed		Client Info		Not Changd	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		20	15	---
Iron	ppm	ASTM D5185m	>275	18	18	---
Chromium	ppm	ASTM D5185m	>4	0	<1	---
Nickel	ppm	ASTM D5185m	>4	0	0	---
Titanium	ppm	ASTM D5185m	>3	0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>10	4	16	---
Lead	ppm	ASTM D5185m	>4	0	0	---
Copper	ppm	ASTM D5185m	>30	7	10	---
Tin	ppm	ASTM D5185m	>3	0	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>35	9	15	---
Potassium	ppm	ASTM D5185m	>20	<1	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	9	---
Boron	ppm	ASTM D5185m		450	267	---
Barium	ppm	ASTM D5185m		7	28	---
Molybdenum	ppm	ASTM D5185m		<1	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		5	<1	---
Calcium	ppm	ASTM D5185m		11	9	---
Phosphorus	ppm	ASTM D5185m		1400	1216	---
Zinc	ppm	ASTM D5185m		10	11	---
Sulfur	ppm	ASTM D5185m		20203	24771	---
Visc @ 40°C	cSt	ASTM D445		94.0	121	---

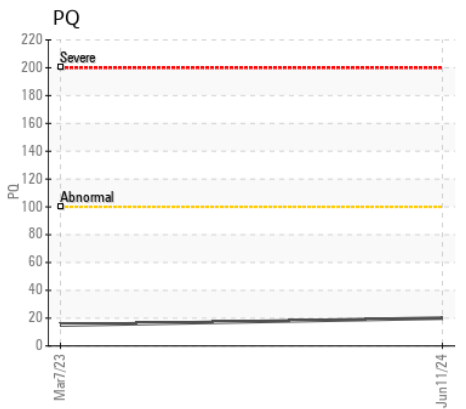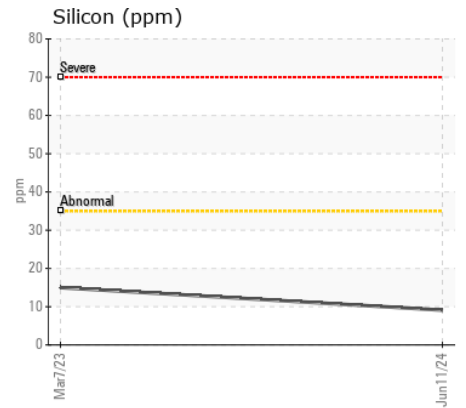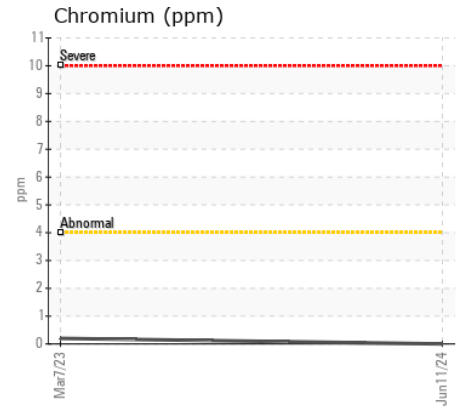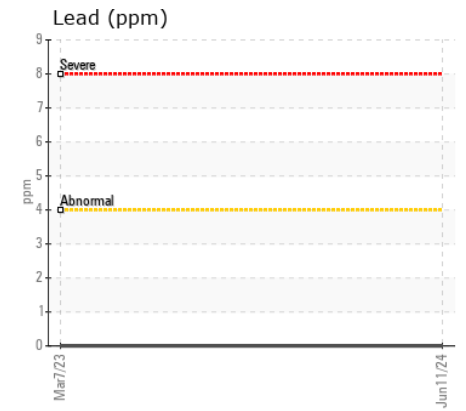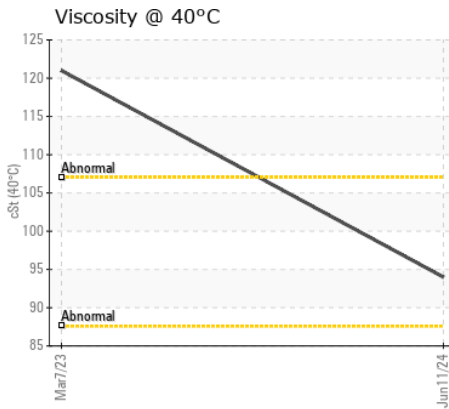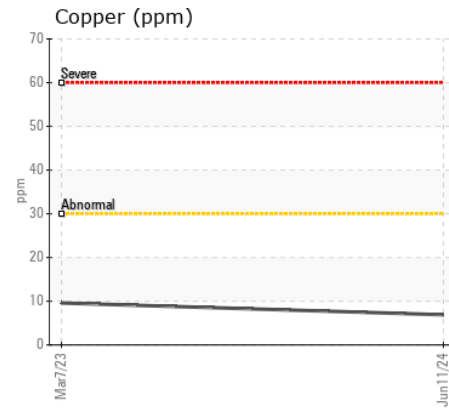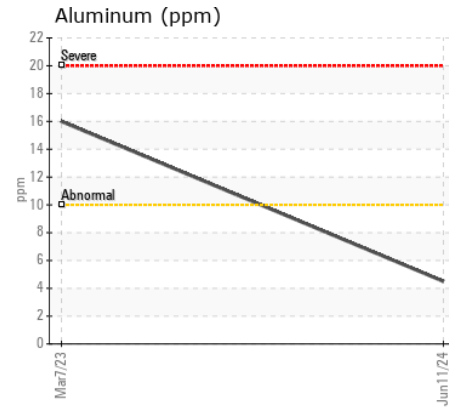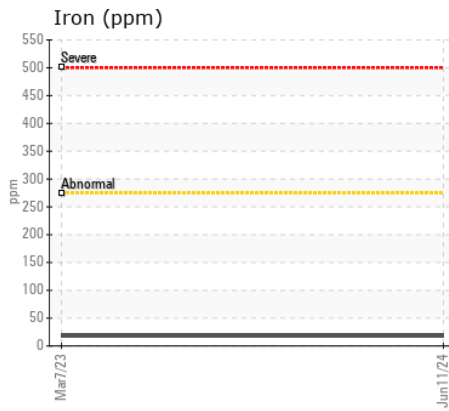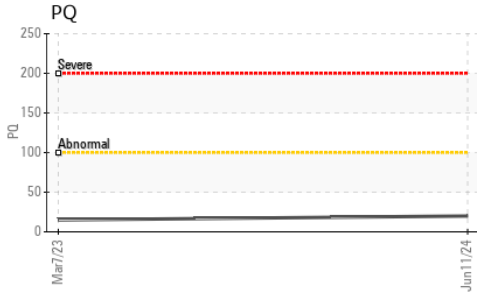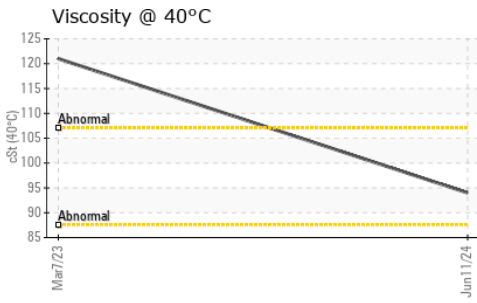

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA062579 **Received** : 20 Jun 2024
Lab Number : 06216064 **Tested** : 22 Jun 2024
Unique Number : 11088928 **Diagnosed** : 23 Jun 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: PQ)

Pacific Power Group - VP981534
 7215 S 228th St
 Kent, WA
 US 98032
 Contact: PAT RYAN
 pryan@pacificpowergroup.com
 T: (253)520-5163
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)