



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Machine Id
LIEBHERR LH110 1227-155752
Component
Rear Left Wheel Hub
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0267274	LH0267542	LH0280589
Sample Date		Client Info		10 Jun 2024	20 May 2024	18 Apr 2024
Machine Age	hrs	Client Info		2998	2578	1980
Oil Age	hrs	Client Info		961	547	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	ATTENTION	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>650	50	35	49
Chromium	ppm	ASTM D5185m	>4	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m	>4	<1	<1	<1
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>25	2	1	1
Lead	ppm	ASTM D5185m	>4	0	0	0
Copper	ppm	ASTM D5185m	>60	12	11	14
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	5	5	5
Potassium	ppm	ASTM D5185m	>20	1	2	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	LIGHT	MODER
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The oil viscosity is lower than normal. Confirm oil type.

Sodium	ppm	ASTM D5185m	>170	0	3	<1
Boron	ppm	ASTM D5185m	400	9	9	0
Barium	ppm	ASTM D5185m	200	0	0	0
Molybdenum	ppm	ASTM D5185m	12	3	5	1
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m	12	47	44	4
Calcium	ppm	ASTM D5185m	150	231	231	187
Phosphorus	ppm	ASTM D5185m	1650	409	358	491
Zinc	ppm	ASTM D5185m	125	187	166	104
Sulfur	ppm	ASTM D5185m	22500	11865	11671	16564
Visc @ 40°C	cSt	ASTM D445	143	77.9	80.6	96.2

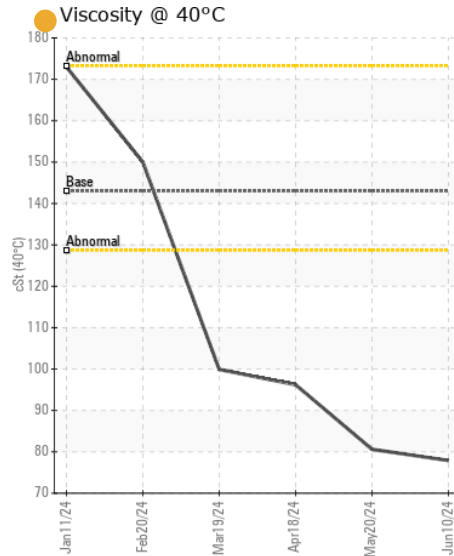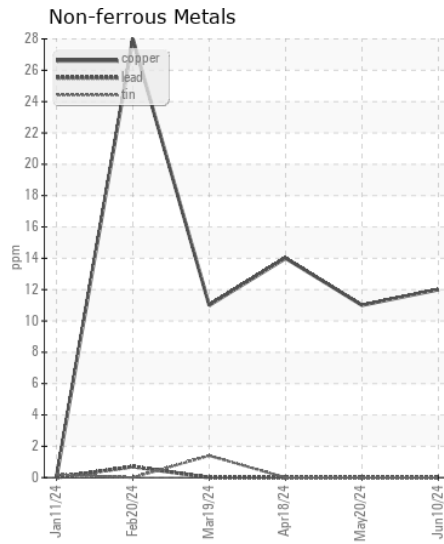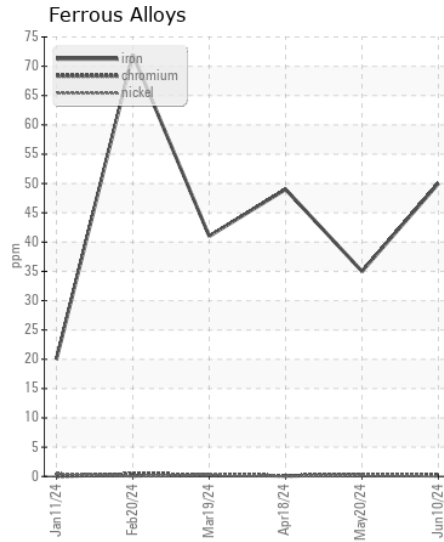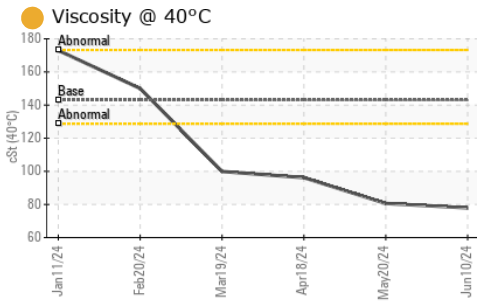

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0267274
Lab Number : 06216189
Unique Number : 11089053
Test Package : CONST

Received : 20 Jun 2024
Tested : 21 Jun 2024
Diagnosed : 23 Jun 2024 - Don Baldrige

KINDER MORGAN
 4301 IVERSON
 TRINITY, AL
 US 35601

Contact: RICKY JOHNSON
 ricky_johnson@kindermorgan.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (256)355-5250