



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 4 - Fairmont
Machine Id
JOHN DEERE 350P 1FF350PAJPF000891
Component
Hydraulic System
Fluid
HITACHI HYDRAULIC SUPER EX 46HN (77 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: CHECK FOR CROSS CONTAMINATION/ WRONG OIL TYPE)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0050858	LEC0047793	---
Sample Date		Client Info		18 Jun 2024	23 Feb 2024	---
Machine Age	hrs	Client Info		650	401	---
Oil Age	hrs	Client Info		650	401	---
Filter Age	hrs	Client Info		650	401	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	16	14	---
Iron	ppm	ASTM D5185m	>32	2	0	---
Chromium	ppm	ASTM D5185m	>9	1	0	---
Nickel	ppm	ASTM D5185m	>5	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>9	2	0	---
Lead	ppm	ASTM D5185m	>28	<1	0	---
Copper	ppm	ASTM D5185m	>50	2	2	---
Tin	ppm	ASTM D5185m	>5	<1	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>11	<1	<1	---
Potassium	ppm	ASTM D5185m	>20	<1	0	---
Water	%	ASTM D6304	>0.075	NEG	NEG	---
Particles >4µm		ASTM D7647	>80000	2279	1046	---
Particles >6µm		ASTM D7647	>20000	285	168	---
Particles >14µm		ASTM D7647	>640	10	6	---
Particles >21µm		ASTM D7647	>160	2	2	---
Particles >38µm		ASTM D7647	>40	1	0	---
Particles >71µm		ASTM D7647	>10	0	0	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	18/15/10	17/15/10	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

Additive levels do not indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The condition of the oils additive package is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	0	1	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		1	<1	---
Molybdenum	ppm	ASTM D5185m		<1	0	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m		<1	0	---
Calcium	ppm	ASTM D5185m		0	2	---
Phosphorus	ppm	ASTM D5185m	827	544	540	---
Zinc	ppm	ASTM D5185m	0	27	35	---
Sulfur	ppm	ASTM D5185m	13	0	97	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.11	0.129	---
Visc @ 40°C	cSt	ASTM D445	47	48.17	48.4	---

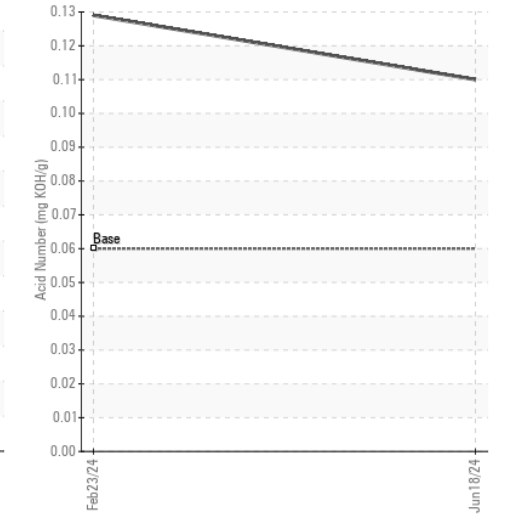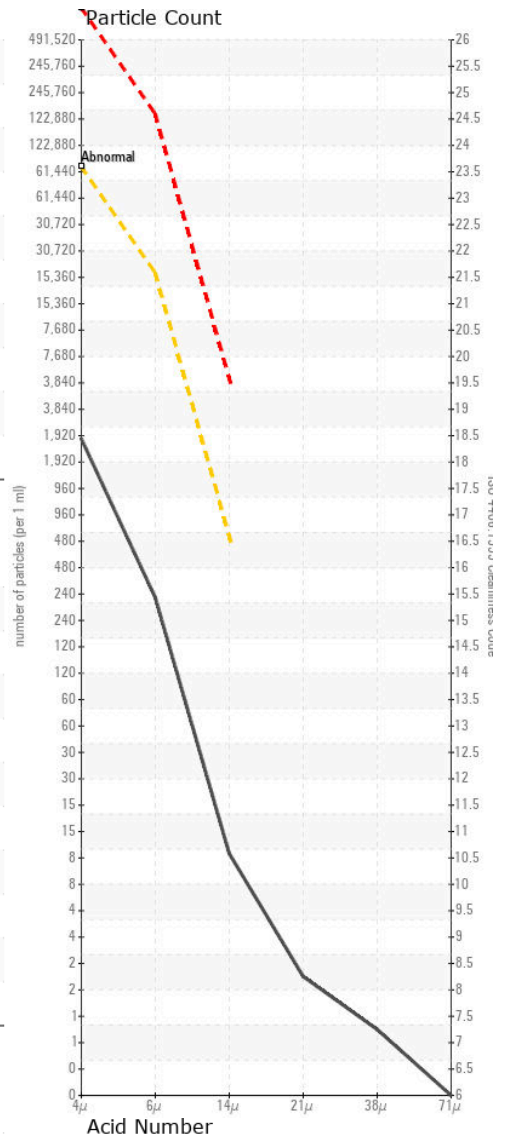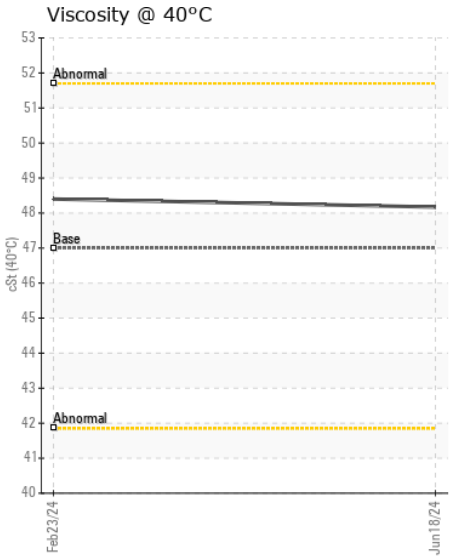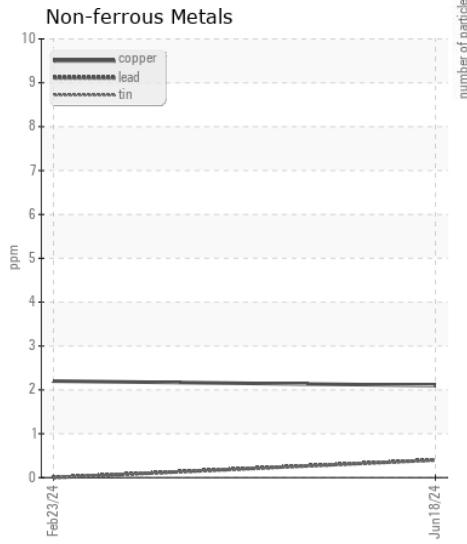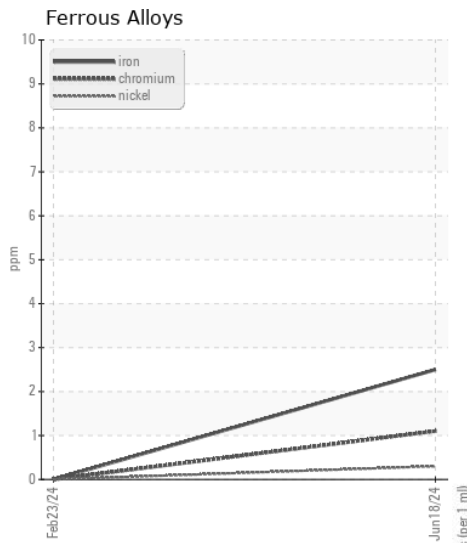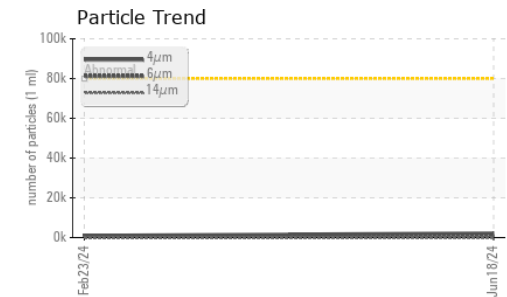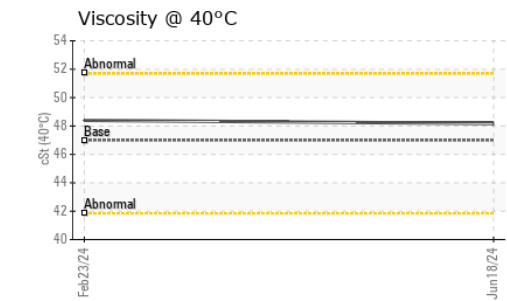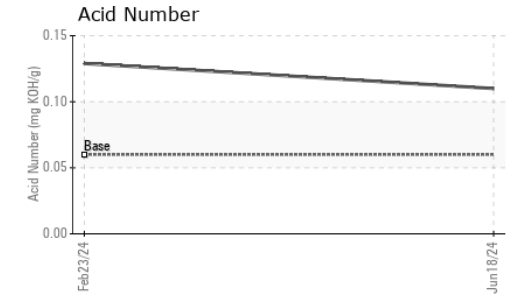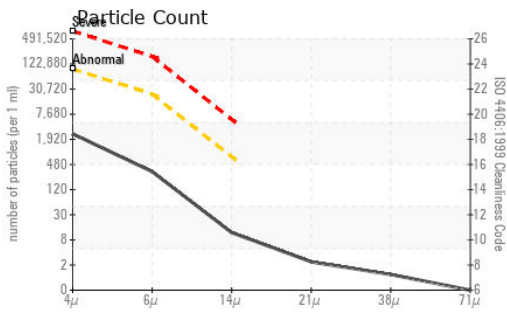

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0050858 **Received** : 20 Jun 2024
Lab Number : 06216267 **Tested** : 20 Jun 2024
Unique Number : 11089131 **Diagnosed** : 20 Jun 2024 - Doug Bogart
Test Package : CONST (Additional Tests: KF, PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570