

Machine Id  
**Wampler Ridge 4**  
Component  
**Natural Gas Engine**  
Fluid  
**PETRO CANADA SENTRON LD 3000 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0117248</b>	PCA0112021	PCA0112017
Sample Date		Client Info		<b>14 Jun 2024</b>	03 Jun 2024	01 May 2024
Machine Age	hrs	Client Info		<b>129591</b>	129344	128570
Oil Age	hrs	Client Info		<b>24314</b>	240677	23293
Filter Age	hrs	Client Info		<b>0</b>	240677	23293
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	SEVERE	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>7</b>	9	6
Chromium	ppm	ASTM D5185m	>4	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>1</b>	2	<1
Lead	ppm	ASTM D5185m	>30	<b>17</b>	20	15
Copper	ppm	ASTM D5185m	>35	<b>2</b>	7	3
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	2	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**














Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>+100	<b>2</b>	3	2
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	6	4
Fuel	%	ASTM D3524	>4.0	<b>0.0</b>	▲ 2.1	0.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.1</b>	0.1	0
Nitration	Abs/cm	*ASTM D7624	>15	<b>6.0</b>	5.9	5.8
Sulfation	Abs/.1mm	*ASTM D7415	>25	<b>19.5</b>	19.3	19.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>20	<b>3</b>	3	0
Boron	ppm	ASTM D5185m	5	<b>&lt;1</b>	<1	0
Barium	ppm	ASTM D5185m	1	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	2	<b>&lt;1</b>	15	2
Manganese	ppm	ASTM D5185m	1	<b>&lt;1</b>	2	<1
Magnesium	ppm	ASTM D5185m	5	<b>15</b>	28	13
Calcium	ppm	ASTM D5185m	1220	<b>1545</b>	▲ 1626	1459
Phosphorus	ppm	ASTM D5185m	298	<b>348</b>	352	332
Zinc	ppm	ASTM D5185m	350	<b>434</b>	▲ 446	410
Sulfur	ppm	ASTM D5185m	1995	<b>2968</b>	▲ 2976	2764
Oxidation	Abs/.1mm	*ASTM D7414	>20	<b>15.4</b>	15.1	14.8
Acid Number (AN)	mg KOH/g	ASTM D8045	0.86	<b>1.74</b>	1.57	1.52
Base Number (BN)	mg KOH/g	ASTM D2896	3.9	<b>2.16</b>	2.36	2.44
Visc @ 100°C	cSt	ASTM D445	13.7	<b>13.8</b>	13.6	13.7

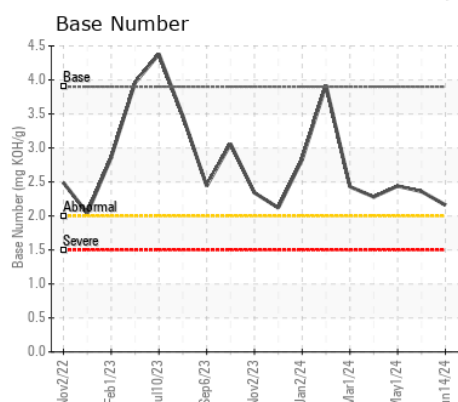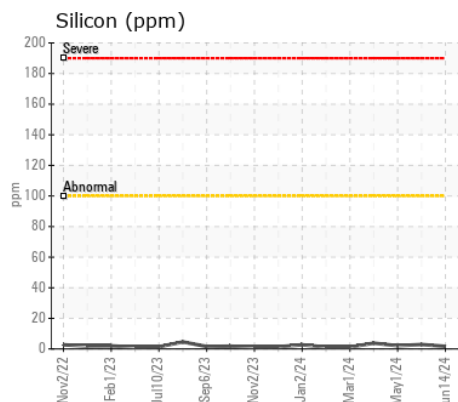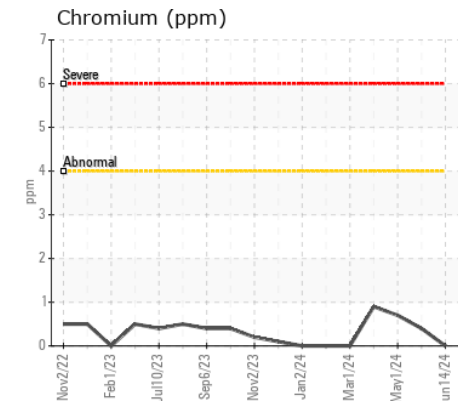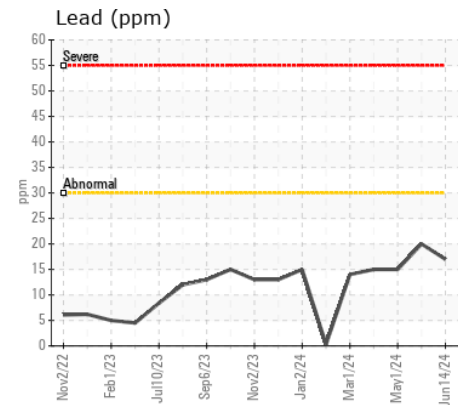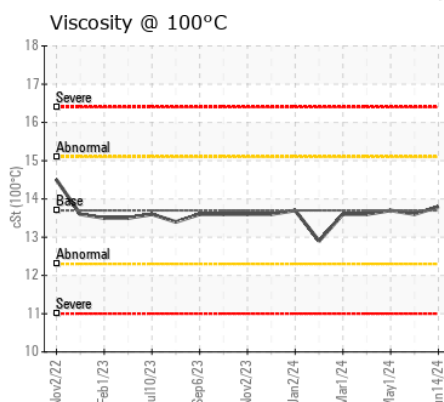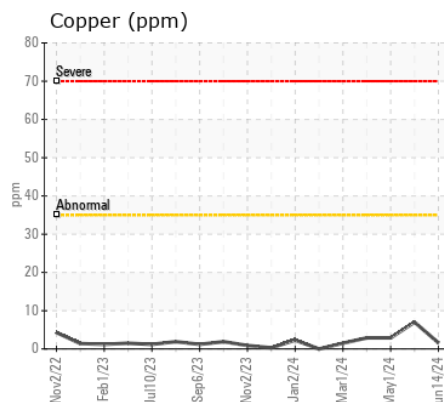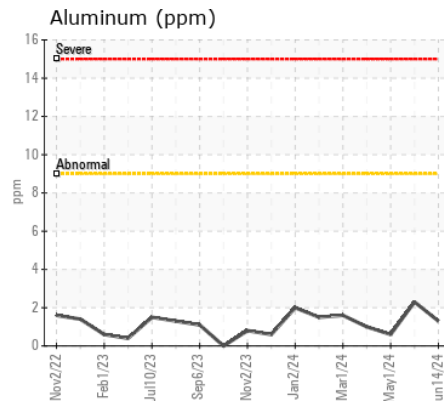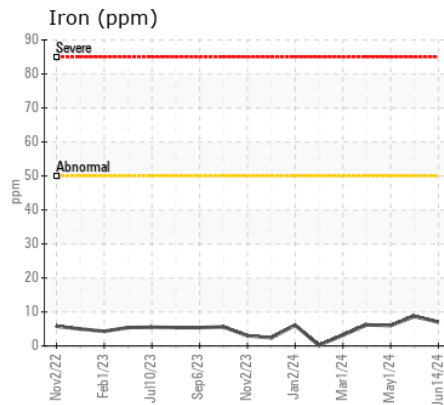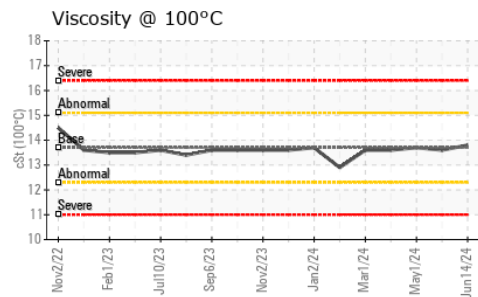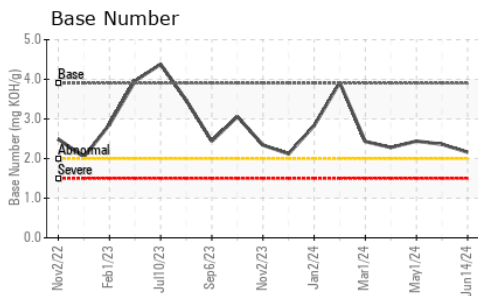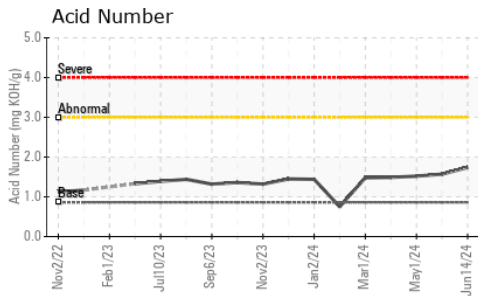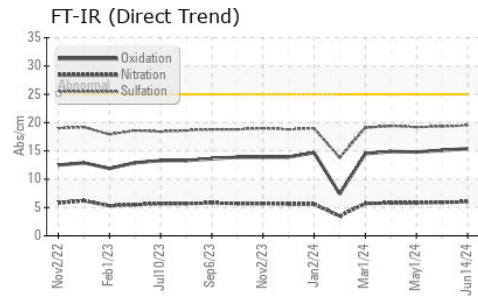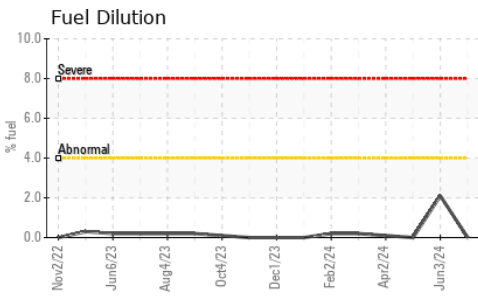

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0117248  
**Lab Number** : 06216342  
**Unique Number** : 11089206  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, PercentFuel )

**ENERVEST OPERATING - WAMPLER RIDGE**  
 1958 COUNTS RIDGE  
 DANTE, VA  
 US 24237  
 Contact: Service Manager

Received : 20 Jun 2024  
 Tested : 24 Jun 2024  
 Diagnosed : 24 Jun 2024 - Sean Felton  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: