



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**PU-1**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON HP 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KFS0006060	---	---
Sample Date		Client Info		30 May 2024	---	---
Machine Age	mls	Client Info		288829	---	---
Oil Age	mls	Client Info		5160	---	---
Filter Age	mls	Client Info		5160	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	8	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	2	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.6	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m		4	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		57	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		968	---	---
Calcium	ppm	ASTM D5185m		1244	---	---
Phosphorus	ppm	ASTM D5185m		1162	---	---
Zinc	ppm	ASTM D5185m		1361	---	---
Sulfur	ppm	ASTM D5185m		3845	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	10.22	---	---
Visc @ 100°C	cSt	ASTM D445	15.6	14.5	---	---

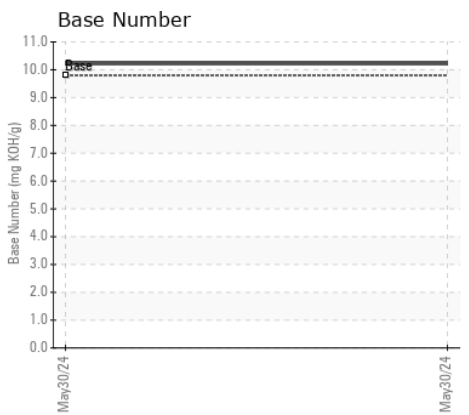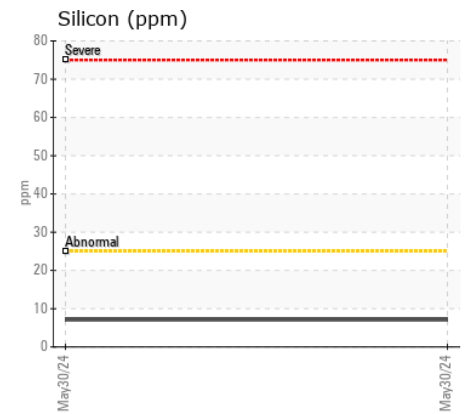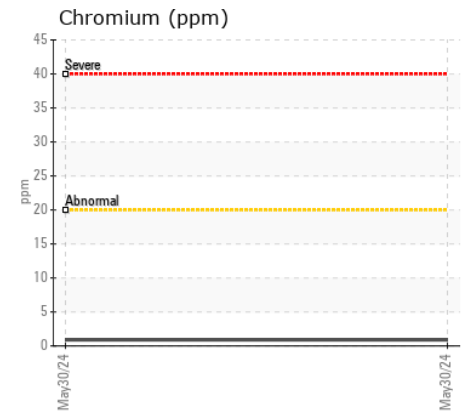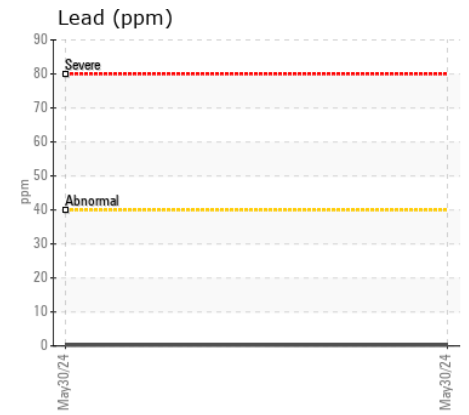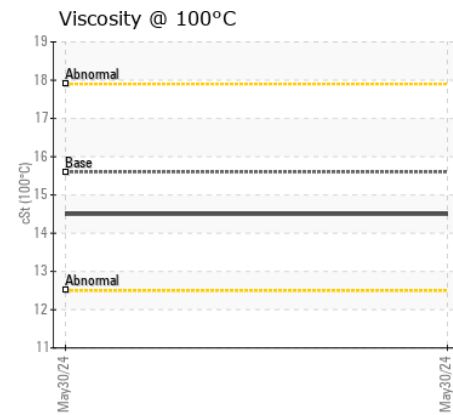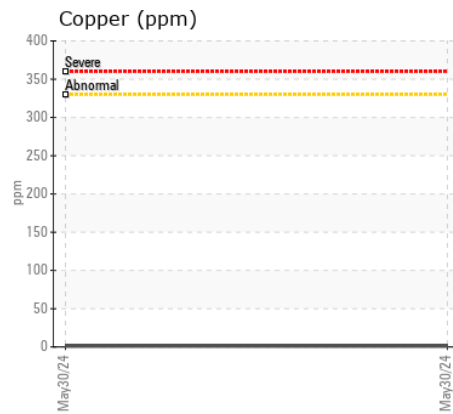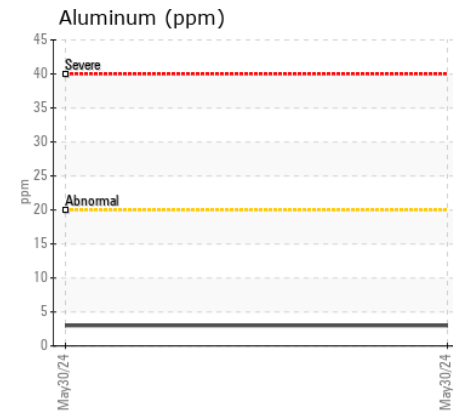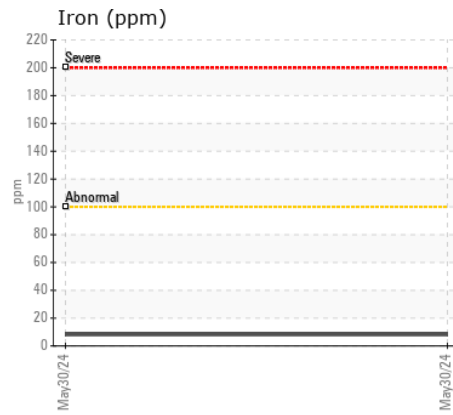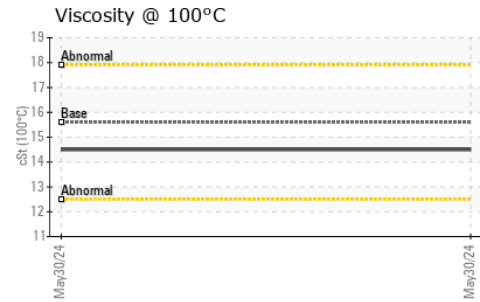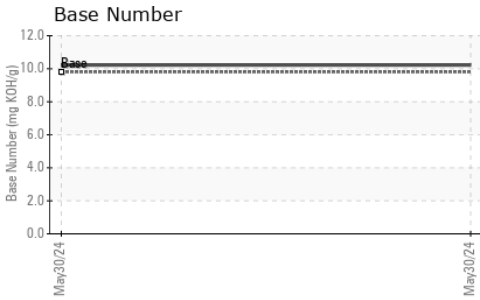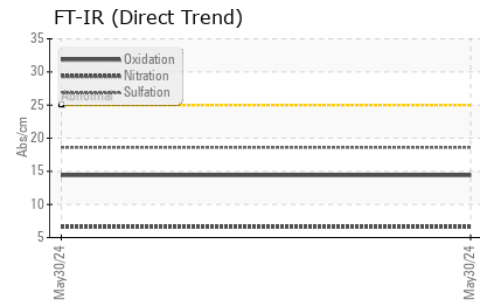

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : KFS0006060

**Lab Number** : 06216355

**Unique Number** : 11089219

**Test Package** : MOB 2

**Received** : 20 Jun 2024

**Tested** : 21 Jun 2024

**Diagnosed** : 21 Jun 2024 - Wes Davis

**HARNES LLLC**

855 N JAMES CAMPBELL BLVD

COLUMBIA, TN

US 38401

Contact: BEN HARNES

ben@slectharness.com

T: (615)733-4480

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)