



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
KEMP QUARRIES / SELIGMAN [68983]

Machine Id
WL114

Component
Hydraulic System

Fluid
PETRO CANADA HYDREX AW 68 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: PM-2 changed filters)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0126284	PCA0070601	---
Sample Date		Client Info		11 Jun 2024	15 Nov 2023	---
Machine Age	hrs	Client Info		1491	0	---
Oil Age	hrs	Client Info		1491	953	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	2	5	---
Chromium	ppm	ASTM D5185m	>10	0	0	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>10	<1	0	---
Lead	ppm	ASTM D5185m	>10	0	0	---
Copper	ppm	ASTM D5185m	>75	8	5	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	2	2	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	2	---
Boron	ppm	ASTM D5185m	0	4	8	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	0	1	5	---
Manganese	ppm	ASTM D5185m	0	<1	0	---
Magnesium	ppm	ASTM D5185m	0	35	67	---
Calcium	ppm	ASTM D5185m	50	193	324	---
Phosphorus	ppm	ASTM D5185m	330	412	421	---
Zinc	ppm	ASTM D5185m	430	513	483	---
Sulfur	ppm	ASTM D5185m	760	1262	1168	---
Visc @ 40°C	cSt	ASTM D445	67.4	66.3	68.9	---

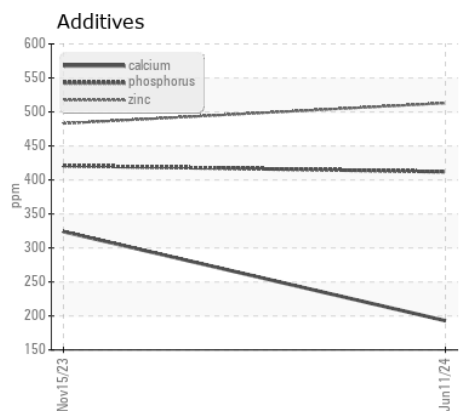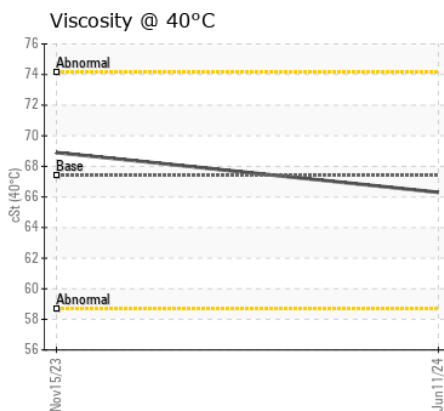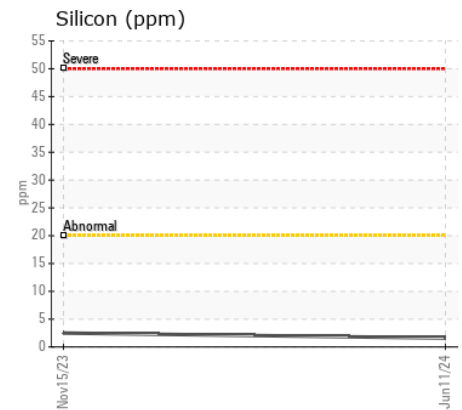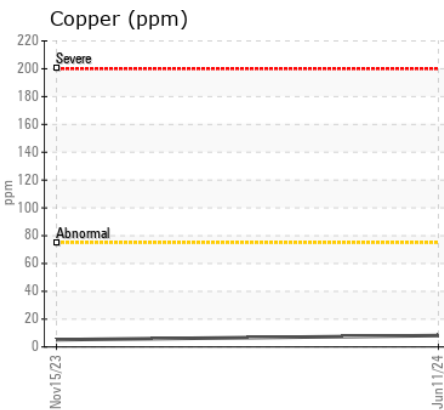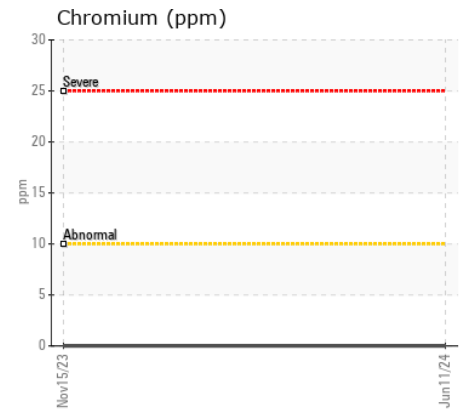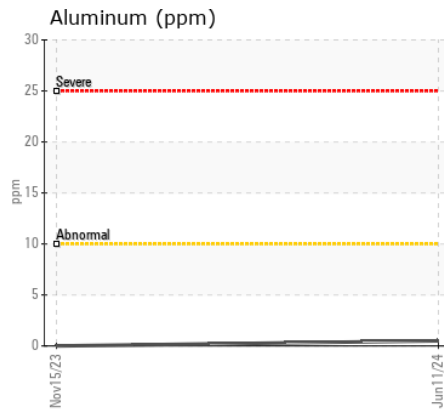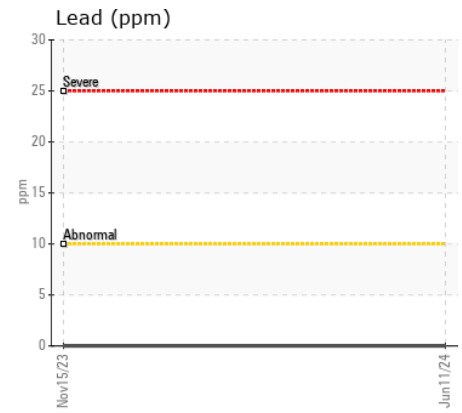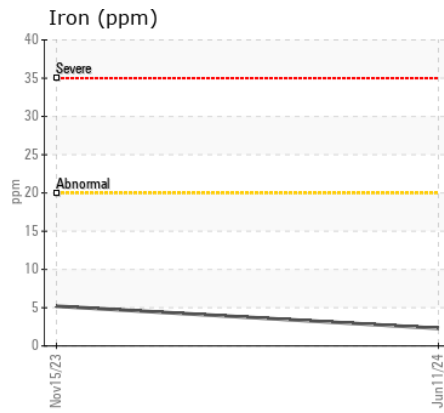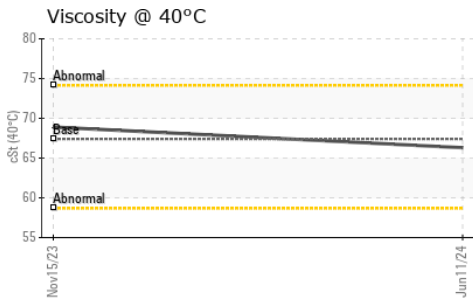

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : PCA0126284
 Lab Number : 06216414
 Unique Number : 11089278
 Test Package : MOB 1

Received : 20 Jun 2024
 Tested : 22 Jun 2024
 Diagnosed : 23 Jun 2024 - Don Baldrige

Kemp Quarries - BCS - Seligman
 8261 Farm rd 2295
 Seligman, MO
 US 65745
 Contact: TECHNICIAN ACCOUNT
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: