



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**FREIGHTLINER 13038**  
Component  
**Diesel Engine**  
Fluid  
**CHEVRON 15W40 (20 QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0936326</b>	WC0827977	WC0774004
Sample Date		Client Info		<b>24 May 2024</b>	29 Sep 2023	13 Jan 2023
Machine Age	mls	Client Info		<b>234869</b>	228050	220695
Oil Age	mls	Client Info		<b>10000</b>	0	10000
Filter Age	mls	Client Info		<b>10000</b>	0	10000
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ATTENTION

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	<b>31</b>	13	15
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>4</b>	1	1
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>150	<b>5</b>	1	<1
Tin	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	<b>5</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	0.6
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.1	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.0</b>	6.4	6.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.5</b>	18.6	18.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>50	<b>0</b>	0	<1
Boron	ppm	ASTM D5185m		<b>13</b>	5	6
Barium	ppm	ASTM D5185m		<b>0</b>	<1	1
Molybdenum	ppm	ASTM D5185m		<b>68</b>	59	62
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>941</b>	874	932
Calcium	ppm	ASTM D5185m		<b>1149</b>	1041	1105
Phosphorus	ppm	ASTM D5185m		<b>973</b>	925	1017
Zinc	ppm	ASTM D5185m		<b>1254</b>	1135	1211
Sulfur	ppm	ASTM D5185m		<b>2865</b>	3378	3277
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.0</b>	14.4	14.0
Base Number (BN)	mg KOH/g	ASTM D2896		<b>9.1</b>	9.8	10.0
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.7</b>	12.6	11.8


**FT-IR (Direct Trend)**

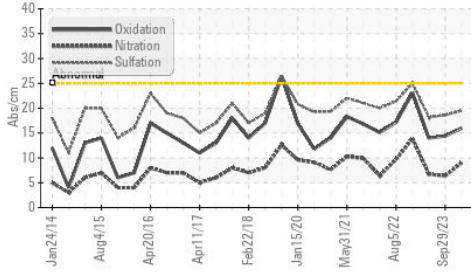


**Base Number**

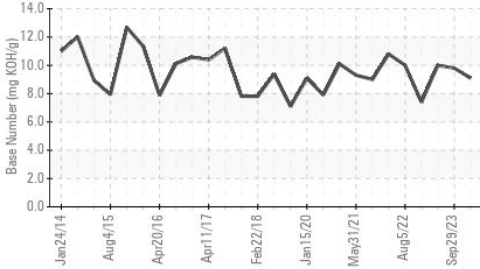


**Viscosity @ 100°C**

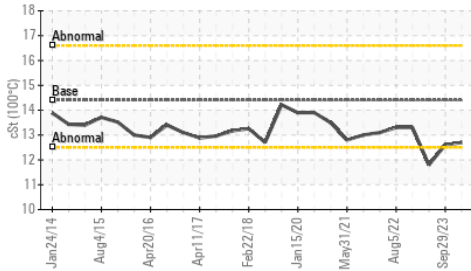


**Ferrous Alloys**

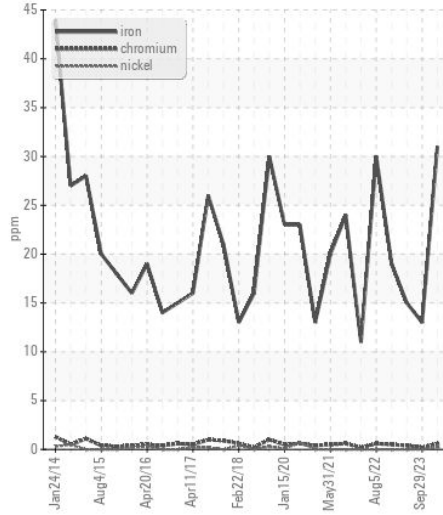


**Non-ferrous Metals**

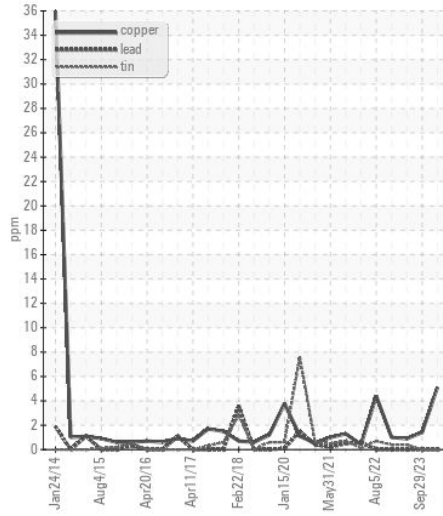

**Viscosity @ 100°C**

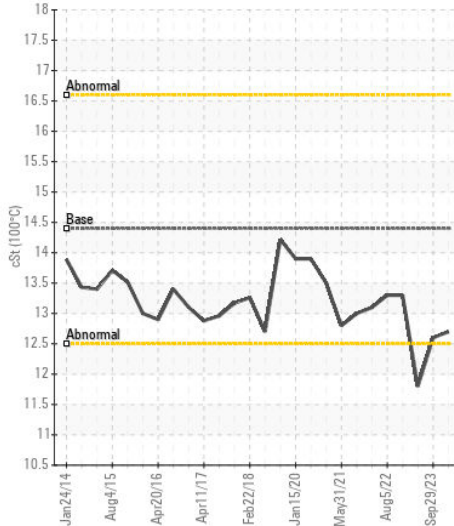

**Base Number**

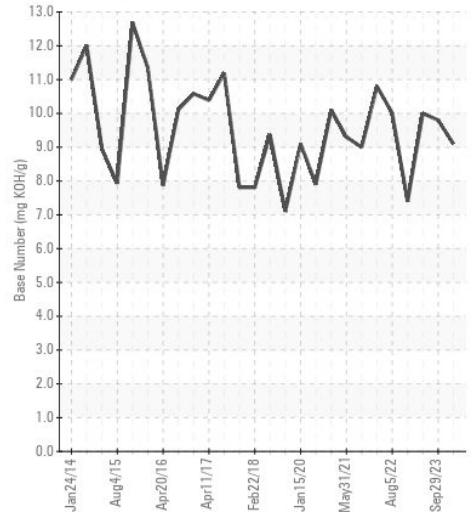

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0936326  
**Lab Number** : 06216451  
**Unique Number** : 11089315  
**Test Package** : FLEET

**Received** : 20 Jun 2024  
**Tested** : 22 Jun 2024  
**Diagnosed** : 22 Jun 2024 - Wes Davis

**SALEM NATIONALEASE CORPORATION**  
 198 PARK PLAZA DRIVE  
 WINSTON SALEM, NC  
 US 27105

Contact: Audrey Hopkins  
 Audrey.Hopkins@salemcorp.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (336)767-9642

F: x: