



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
CATERPILLAR BARBARA ANN
Component
Main Engine
Fluid
KENDALL SUPER-D XA 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		HRE0000252	---	---
Sample Date		Client Info		06 Jun 2024	---	---
Machine Age	hrs	Client Info		7578	---	---
Oil Age	hrs	Client Info		500	---	---
Filter Age	hrs	Client Info		500	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	72	---	---
Chromium	ppm	ASTM D5185m	>8	2	---	---
Nickel	ppm	ASTM D5185m	>2	1	---	---
Titanium	ppm	ASTM D5185m	>3	51	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>15	2	---	---
Lead	ppm	ASTM D5185m	>18	<1	---	---
Copper	ppm	ASTM D5185m	>80	4	---	---
Tin	ppm	ASTM D5185m	>14	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	6	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.4	---	---
Nitration	Abs/cm	*ASTM D7624	>20	13.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	12	---	---
Boron	ppm	ASTM D5185m	50	43	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		18	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	270	533	---	---
Calcium	ppm	ASTM D5185m	1900	1326	---	---
Phosphorus	ppm	ASTM D5185m	1000	934	---	---
Zinc	ppm	ASTM D5185m	1260	1131	---	---
Sulfur	ppm	ASTM D5185m	3400	4630	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	27.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.5	5.4	---	---
Visc @ 100°C	cSt	ASTM D445	15.3	12.5	---	---

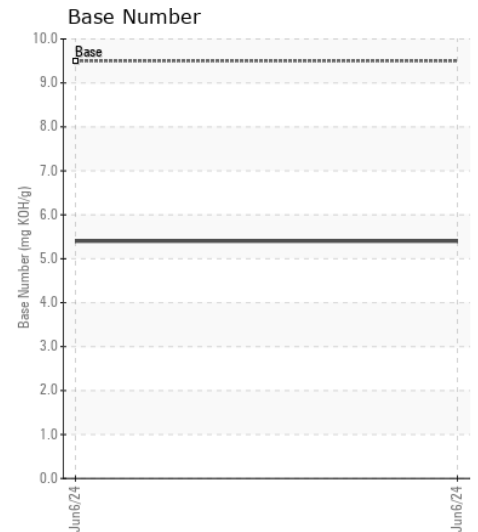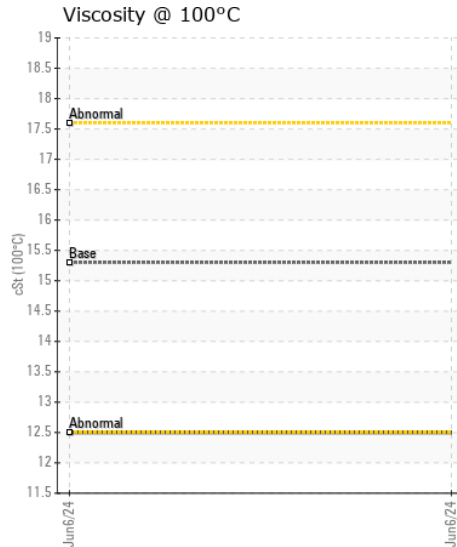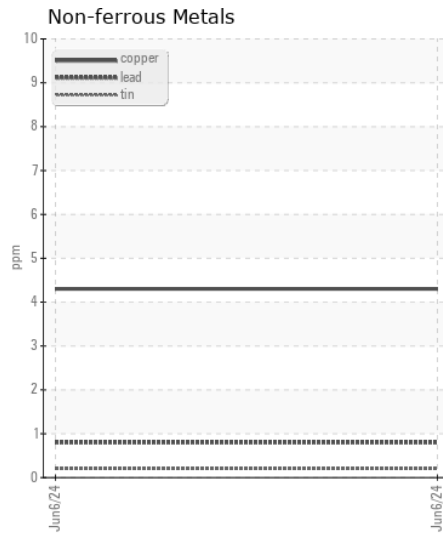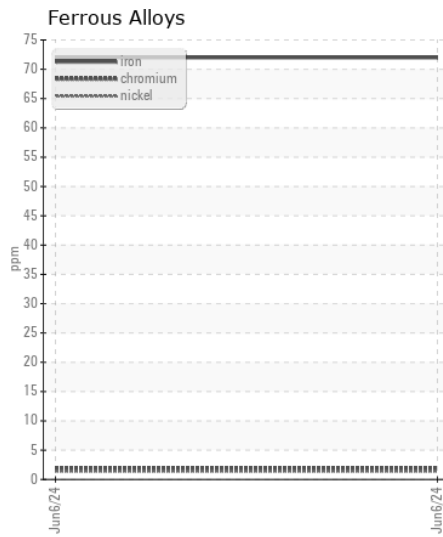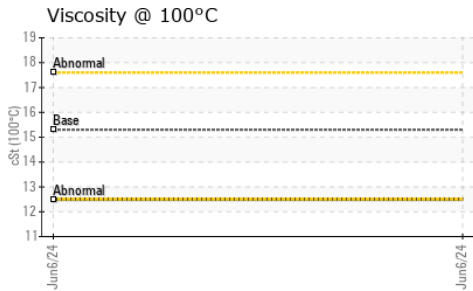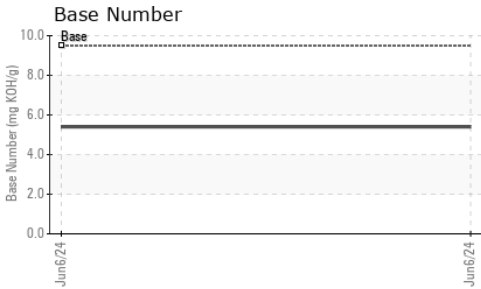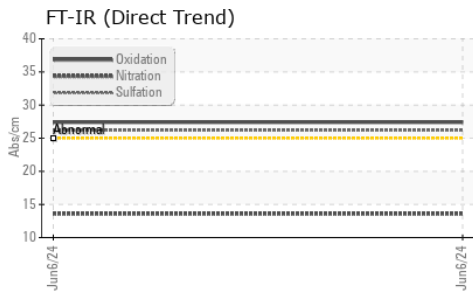

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : HRE0000252

Lab Number : 06216463

Unique Number : 11089327

Test Package : FLEET

Received : 20 Jun 2024

Tested : 22 Jun 2024

Diagnosed : 23 Jun 2024 - Don Baldrige

SUPERIOR MARINE

201 KELLY LANE

CHESAPEAKE, OH

US 45619

Contact: DARRELL KEARNS

darrellkearns@superiormarineinc.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: